

HSF


NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5222-XX Y P XX B X 0 1

Two Parts
 Comm-Cover 06P 20P 50P=Gold Flash/Ni B=Black
 08P 30P S3=10u"Gold/Ni G=Grey(427C) N=W/O Bump
 10P 34P S4=15u"Gold/Ni W=With Bump
 12P 36P S5=30u"Gold/Ni
 14P 40P SN=Tm
 16P 44P
 18P 50P
 20P 60P
 22P 64P
 24P

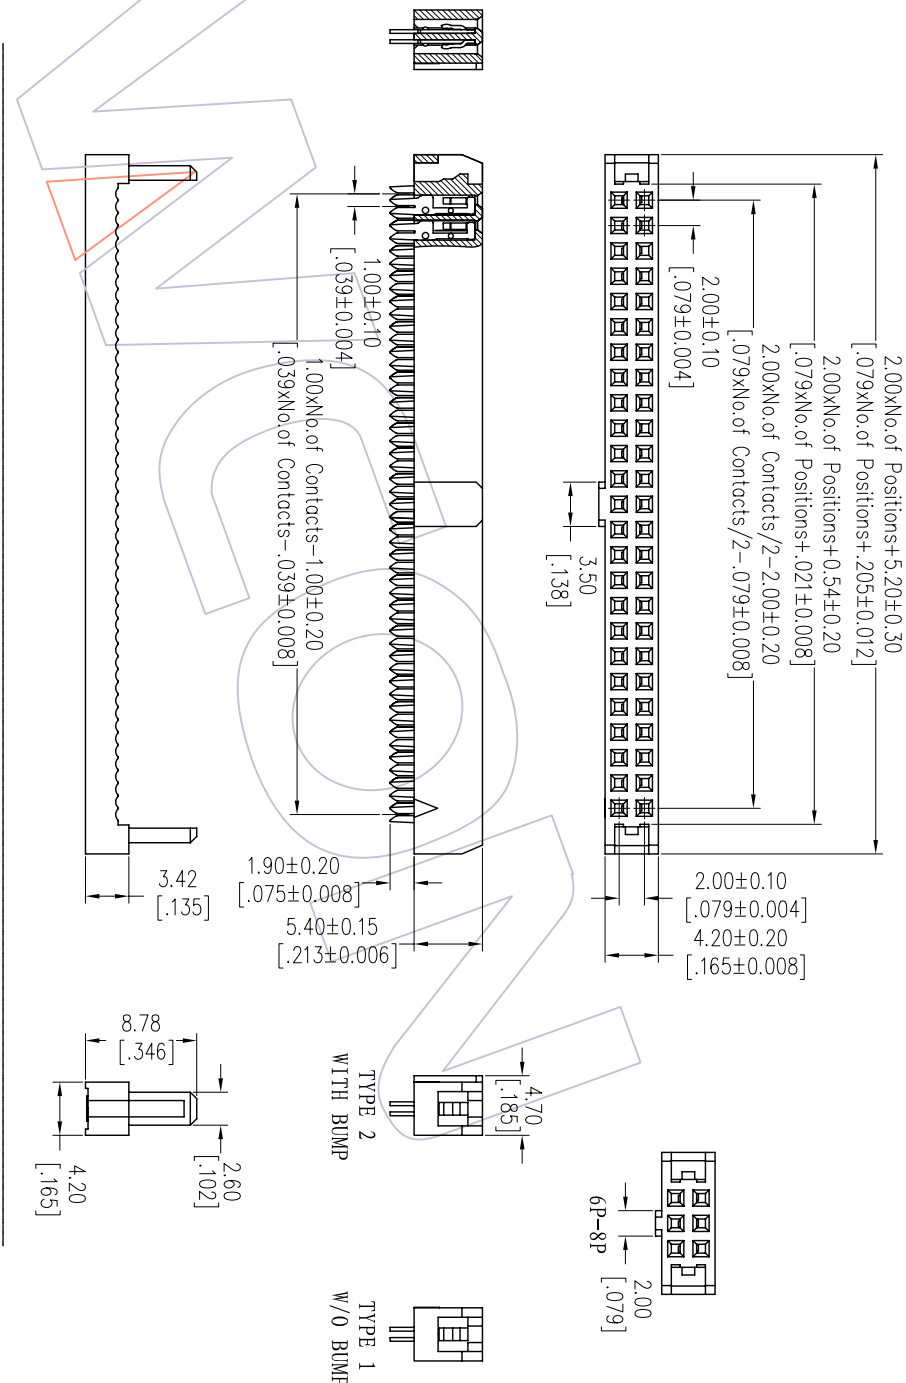

SR P/N: G5220-XXDX01

| Item | Pitch | Mating |
|-----------|-------|-----------|
| Standard | 2.00 | 3111/3220 |
| Alternate | | |

| TYPE | PART NO. |
|--------|-----------------|
| TYPE 1 | 5222-XXYPXXBN01 |
| TYPE 2 | 5222-XXYPXXBW01 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|-----|------------|--------------------------|--------|
| A0 | 2012/10/10 | NEW | |

| OPERATION | DRAW | DATE | SCALE | FIT |
|-----------|---------|------------|-------|-----|
| XX | JYHuong | 2012/10/10 | UNIT | mm |
| XX | CHECK | DATE | SIZE | A4 |
| X.XXX | ±0.25 | | SHEET | 1/1 |
| X.XXX | ±0.15 | | PROJ. | |
| Angle | ± 3° | APPROVE | | |
| DIM | TOL | DATE | | |

| PART NO. | SEE TABLE |
|--------------|--|
| TITLE: | 2.00 IDC SOCKET+SN (ONE SLIDE CONTACT) |
| Customer NO. | |

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[571763P](#) [61-168618-12P](#) [D20419-211](#) [72.250.1628.2](#) [72.250.2428.2](#) [76.350.0729.0](#) [76871-1403](#) [PCR-E36PM](#) [PCS-XE26LKA](#) [PCS-XES68MS+](#) [G38A71314B](#) [9776-18-6](#) [DX40-50P\(55\)](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [91-569786-35H](#)
[172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDMR-29-01-S-SM-TR](#) [HDRA-E68W1LFDTC-SL+](#) [54182-0605](#) [U90B2054081210](#) [UE86K842720321](#)
[38113800006](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [DX40-20P\(55\)](#) [5554841-1](#) [SM3100F14S-12P](#) [SM3106F14S-7S-LC](#) [SM3106R18-18S](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [60-042222-02S](#) [10099439-003C-TRLF](#)