
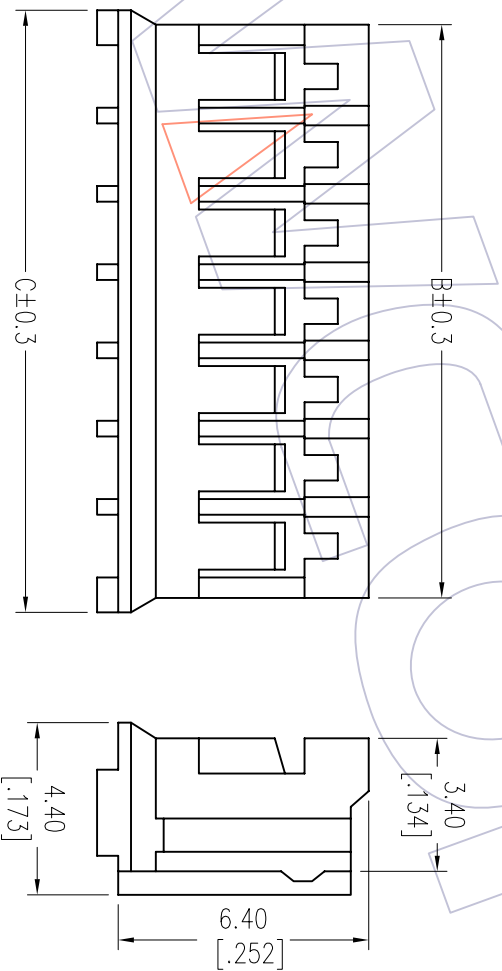


# HSF

**NOTES:**

Rated Current: 1.0A  
 Rated Voltage: 100V AC, DC  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 800V AC/Minute  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -25°C to +85°C  
 Material: PA66 UL94V-0

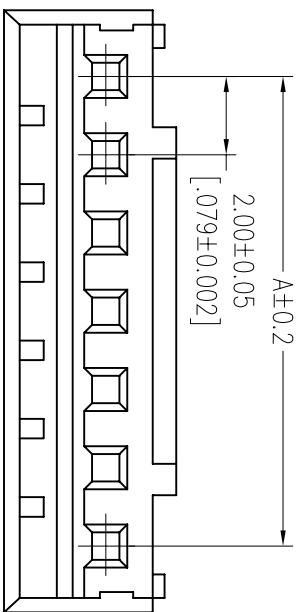

## Ordering Information

WF2001 - H **XX** **X** 01

No. of pins: 02pin~20pin  
 Color: E=Beige, W=White, B=Black, N=Brown  
 Packing: 0=PE Bag

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'TY / bag
		A	B	C	
02	WF2001-H02X01	2.0	4.65	5.8	1,000
03	WF2001-H03X01	4.0	6.65	7.8	1,000
04	WF2001-H04X01	6.0	8.65	9.8	1,000
05	WF2001-H05X01	8.0	10.65	11.8	1,000
06	WF2001-H06X01	10.0	12.65	13.8	1,000
07	WF2001-H07X01	12.0	14.65	15.8	1,000
08	WF2001-H08X01	14.0	16.65	17.8	1,000
09	WF2001-H09X01	16.0	18.65	19.8	1,000
10	WF2001-H10X01	18.0	20.65	21.8	1,000
11	WF2001-H11X01	20.0	22.65	23.8	
12	WF2001-H12X01	22.0	24.65	25.8	1,000
13	WF2001-H13X01	24.0	26.65	27.8	1,000
14	WF2001-H14X01	26.0	28.65	29.8	1,000
15	WF2001-H15X01	28.0	30.65	31.8	1,000
16	WF2001-H16X01	30.0	32.65	33.8	1,000
17	WF2001-H17X01	32.0	34.65	35.8	1,000
18	WF2001-H18X01	34.0	36.65	37.8	1,000
19	WF2001-H19X01	36.0	38.65	39.8	1,000
20	WF2001-H20X01	38.0	40.65	41.8	1,000

OPERATION	DATE	DRAW	SCALE	FIT	PART NO.
X.X	2012/09/04	JYHuang	UNIT	mm	SEE TAB
CHECK	DATE	CHECK	SIZE	A4	TITLE:
X.XXX			SHEET	1/1	"J" TYPE PH2.0 HOUSING
Angle		APPROVE	PROJ.		Customer NO.
± 3'					
± 0.15					
MODIFICATION DESCRIPTION	CHANGE				
NEW					
REV	DATE				
A0	2012/09/04				

# WCON

WCON-Dongguan  
 Http: www.wcon.com  
 WCON-Kunshan  
 Tel: +86 769 85358920  
 Tel: +86 512 57468408  
 Fax: +86 769 85358915  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com  
 E-mail: sales@wcon.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)