
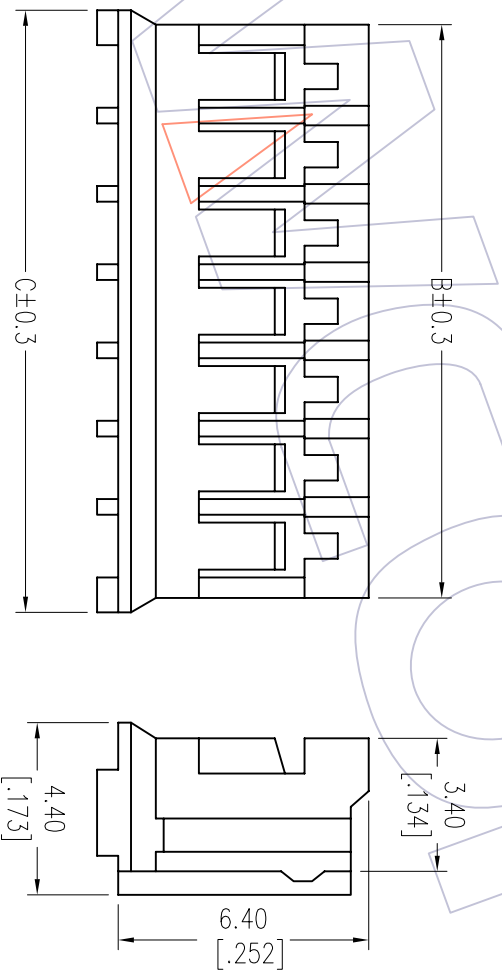


HSF

NOTES:

Rated Current: 1.0A
 Rated Voltage: 100V AC,DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 800V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C
 Material: PA66 UL94V-0

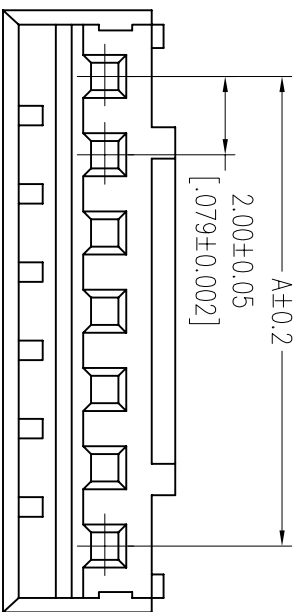

Ordering Information

WF2001 - H **XX** **X** 0 1

No. of pins: 02pin~20pin
 Color: E=Beige, W=White, B=Black, N=Brown
 Packing: 0=PE Bag

Specification & Ordering Information:

| Circuit | Part No. | Dimension | | | Q'TY / bag |
|---------|---------------|-----------|-------|------|------------|
| | | A | B | C | |
| 02 | WF2001-H02X01 | 2.0 | 4.65 | 5.8 | 1,000 |
| 03 | WF2001-H03X01 | 4.0 | 6.65 | 7.8 | 1,000 |
| 04 | WF2001-H04X01 | 6.0 | 8.65 | 9.8 | 1,000 |
| 05 | WF2001-H05X01 | 8.0 | 10.65 | 11.8 | 1,000 |
| 06 | WF2001-H06X01 | 10.0 | 12.65 | 13.8 | 1,000 |
| 07 | WF2001-H07X01 | 12.0 | 14.65 | 15.8 | 1,000 |
| 08 | WF2001-H08X01 | 14.0 | 16.65 | 17.8 | 1,000 |
| 09 | WF2001-H09X01 | 16.0 | 18.65 | 19.8 | 1,000 |
| 10 | WF2001-H10X01 | 18.0 | 20.65 | 21.8 | 1,000 |
| 11 | WF2001-H11X01 | 20.0 | 22.65 | 23.8 | |
| 12 | WF2001-H12X01 | 22.0 | 24.65 | 25.8 | 1,000 |
| 13 | WF2001-H13X01 | 24.0 | 26.65 | 27.8 | 1,000 |
| 14 | WF2001-H14X01 | 26.0 | 28.65 | 29.8 | 1,000 |
| 15 | WF2001-H15X01 | 28.0 | 30.65 | 31.8 | 1,000 |
| 16 | WF2001-H16X01 | 30.0 | 32.65 | 33.8 | 1,000 |
| 17 | WF2001-H17X01 | 32.0 | 34.65 | 35.8 | 1,000 |
| 18 | WF2001-H18X01 | 34.0 | 36.65 | 37.8 | 1,000 |
| 19 | WF2001-H19X01 | 36.0 | 38.65 | 39.8 | 1,000 |
| 20 | WF2001-H20X01 | 38.0 | 40.65 | 41.8 | 1,000 |

| | | | | | |
|--------------------------|------------|---------|-------|-----|-------------------------|
| OPERATION | DATE | DRAW | SCALE | FIT | PART NO. |
| X.X | 2012/09/04 | JYHuang | UNIT | mm | SEE TAB |
| CHECK | DATE | CHECK | SIZE | A4 | TITLE: |
| X.XXX | | | SHEET | 1/1 | "J" TYPE PH2. 0 HOUSING |
| Angle | | APPROVE | PROJ. | | Customer NO. |
| ± 3' | | | | | |
| MODIFICATION DESCRIPTION | CHANGE | | | | |
| NEW | | | | | |
| REV | DATE | | | | |
| A0 | 2012/09/04 | | | | |

WCON

WCON-Dongguan
 Http: www.wcon.com
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)