

HSF

NOTES:

Rated Voltage:250V AC/DC
 Rated Current:2.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:800V AC/minute
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-25℃ to +85℃
 Contact Material:Brass
 Contact plating:Au or Sn over Ni
 Insulator Material:PA46 Or PA66(UL94V-0)

Ordering Information


WF2002 - WS XX X 0 X

H=PA46 No.of pins S3=10u"Gold/Tin
 Blank=PA66 04-50P S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 S6=10u"Gold
 S7=15u"Gold
 S8=30u"Gold
 Blank=Tin


Contact Plating
 S0=Gold Flash/Tin
 S1=10u"Gold/Tin
 S2=15u"Gold/Tin
 S3=30u"Gold/Tin

Color
 B=Black
 E=Beige
 W=White

Packing
 O=PE Bag
 T=Tube

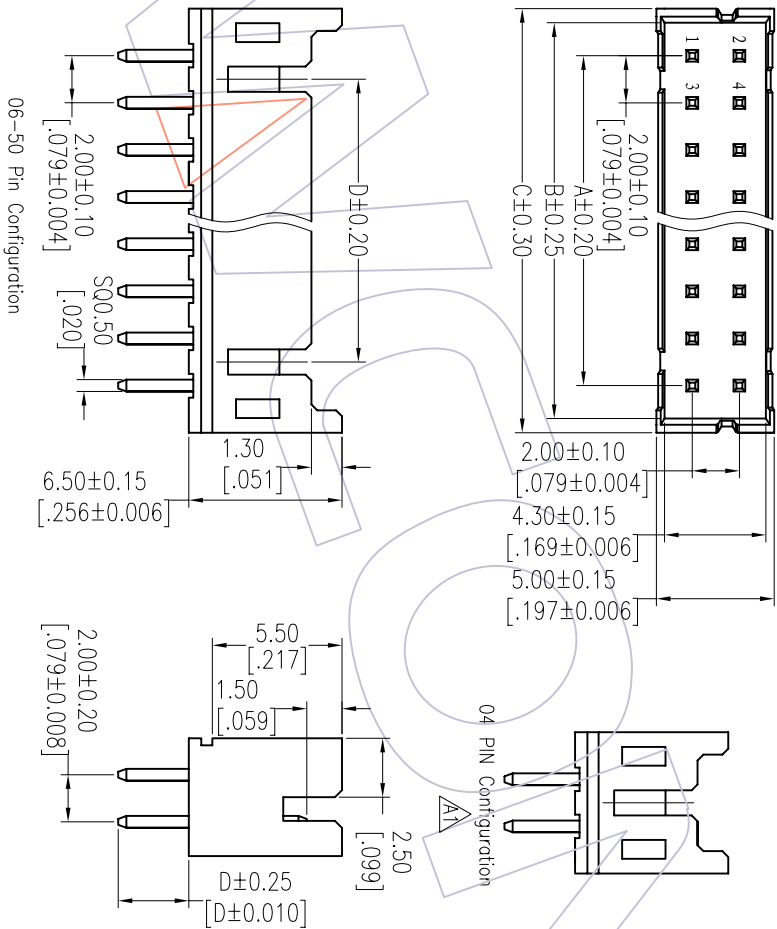

Specification & Ordering Information:



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Circuit	Part No.	Dimension				Q'ty /Bog
		A	B	C	D	
04	WF2002-WS04X01	2.00	4.80	6.00	---	4,000
06	WF2002-WS06X0X	4.00	6.80	8.00	---	3,000
08	WF2002-WS08X0X	6.00	8.80	10.00	4.00	2,000
10	WF2002-WS10X0X	8.00	10.80	12.00	6.00	2,000
12	WF2002-WS12X0X	10.00	12.80	14.00	8.00	2,000
14	WF2002-WS14X0X	12.00	14.80	16.00	10.00	1,000
16	WF2002-WS16X0X	14.00	16.80	18.00	12.00	1,000
18	WF2002-WS18X0X	16.00	18.80	20.00	14.00	1,000
20	WF2002-WS20X0X	18.00	20.80	22.00	16.00	1,000
22	WF2002-WS22X0X	20.00	22.80	24.00	18.00	1,000
24	WF2002-WS24X0X	22.00	24.80	26.00	20.00	800
26	WF2002-WS26X0X	24.00	26.80	28.00	22.00	800
28	WF2002-WS28X0X	26.00	28.80	30.00	24.00	800
30	WF2002-WS30X0X	28.00	30.80	32.00	26.00	600
32	WF2002-WS32X0X	30.00	32.80	34.00	28.00	500
34	WF2002-WS34X0X	32.00	34.80	36.00	30.00	500
36	WF2002-WS36X0X	34.00	36.80	38.00	32.00	500
38	WF2002-WS38X0X	36.00	38.80	40.00	34.00	300
40	WF2002-WS40X0X	38.00	40.80	42.00	36.00	300
42	WF2002-WS42X0X	40.00	42.80	44.00	38.00	300
44	WF2002-WS44X0X	42.00	44.80	46.00	40.00	300
46	WF2002-WS46X0X	44.00	46.80	48.00	42.00	300
48	WF2002-WS48X0X	46.00	48.80	50.00	44.00	300
50	WF2002-WS50X0X	48.00	50.80	52.00	46.00	300

No.	Dim(D)
1	3.0
2	2.5

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		PART NO.
				XX	XX			UNIT	FIT	
A1	2013/01/30	Add The 04 Pin Configuration Draw		X.XX	±0.40	JYHuang	2013/01/30	mm	1/1	SEE TAB
AO	2012/09/05	NEW		X.XXX	±0.25	CHECK		A4		TITLE: PHD2.0 WAFER 180°
				Angle	±0.15	APPROVE		SHEET	1/1	Customer NO.
				DIM	± 3	PROU.				

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)