
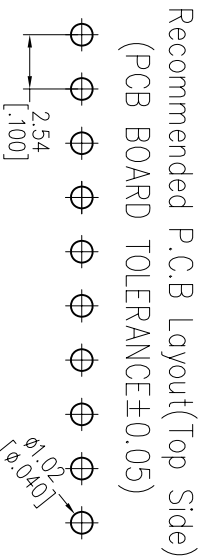


# HSF

NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 20m Ω Max  
 Withstand Voltage: 1000V AC/minute  
 Insulation Resistance: 1000M Ω Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA46 Or PA66 (UL94V-0)

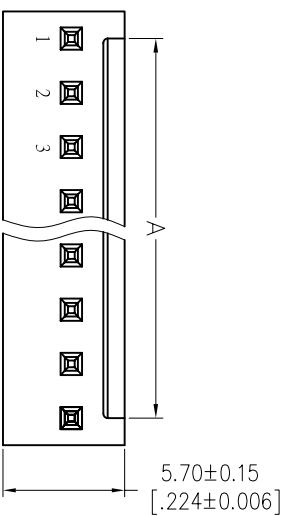


Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'Ty/ bag
		A	B	
02	WF2541-WS02E01	2.54	5.08	1,000
03	WF2541-WS03E01	5.08	7.62	1,000
04	WF2541-WS04E01	7.62	10.16	1,000
05	WF2541-WS05E01	10.16	12.70	500
06	WF2541-WS06E01	12.70	15.24	500
07	WF2541-WS07E01	15.24	17.78	500
08	WF2541-WS08E01	17.78	20.32	500
09	WF2541-WS09E01	20.32	22.86	400
10	WF2541-WS10E01	22.86	25.40	400
11	WF2541-WS11E01	25.40	27.94	300
12	WF2541-WS12E01	27.94	30.48	300
13	WF2541-WS13E01	30.48	33.02	300
14	WF2541-WS14E01	33.02	35.56	300
15	WF2541-WS15E01	35.56	38.10	200
16	WF2541-WS16E01	38.10	40.64	200
17	WF2541-WS17E01	40.64	43.18	200
18	WF2541-WS18E01	43.18	45.72	200
19	WF2541-WS19E01	45.72	48.26	200
20	WF2541-WS20E01	48.26	50.80	200

## Ordering Information

WF2541-WS XX E 0 1

No. of pins  
02-20P  
 Contact Plating  
S0=Gold Flash/Tin  
S3=10u"Gold/Tin  
S4=15u"Gold/Tin  
S5=30u"Gold/Tin  
Blank=P/A66  
 Color  
B=Black  
E=Beige  
T=Natural  
W=White  
 Packing  
0=PE Bag

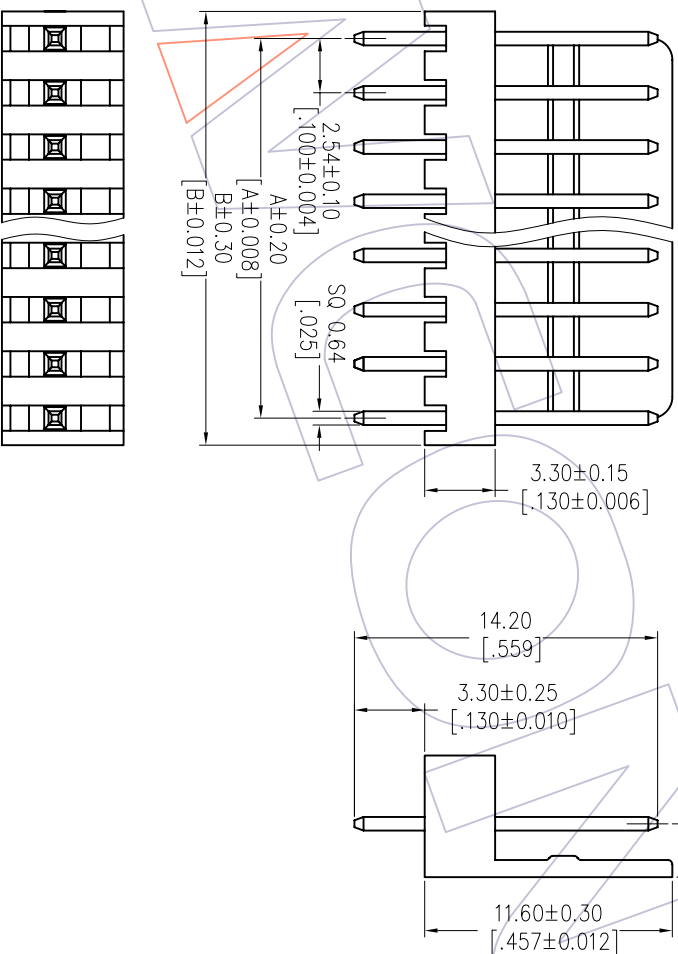

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW		SCALE		PART NO.	
				XX	±0.40	JYHuang	2012/09/08	UNIT	FIT	SEE TAB	TITLE:
AO	2012/09/08	NEW		X.XX	±0.25	CHECK	DATE	SIZE	A4	"M"TYPE 2.54 Wafer 180°	
				X.XXX	±0.15			SHEET	1/1	Customer NO.	
				Angle	± 3'	APPROVE	DATE	PROJ.			

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85355915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)