




# HSF

NOTES:  
 Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -25°C to +85°C

Contact Material: Brass  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA66/PA46(UL94V-0/2)

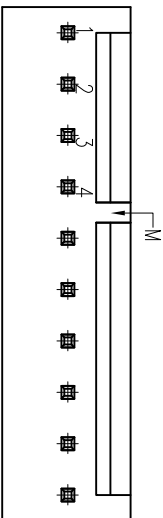

△ <10P: 无掏料槽  
 示意图

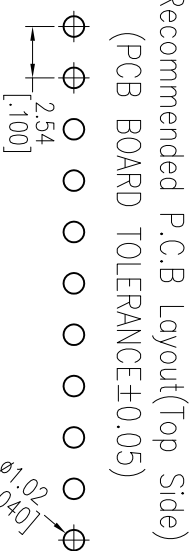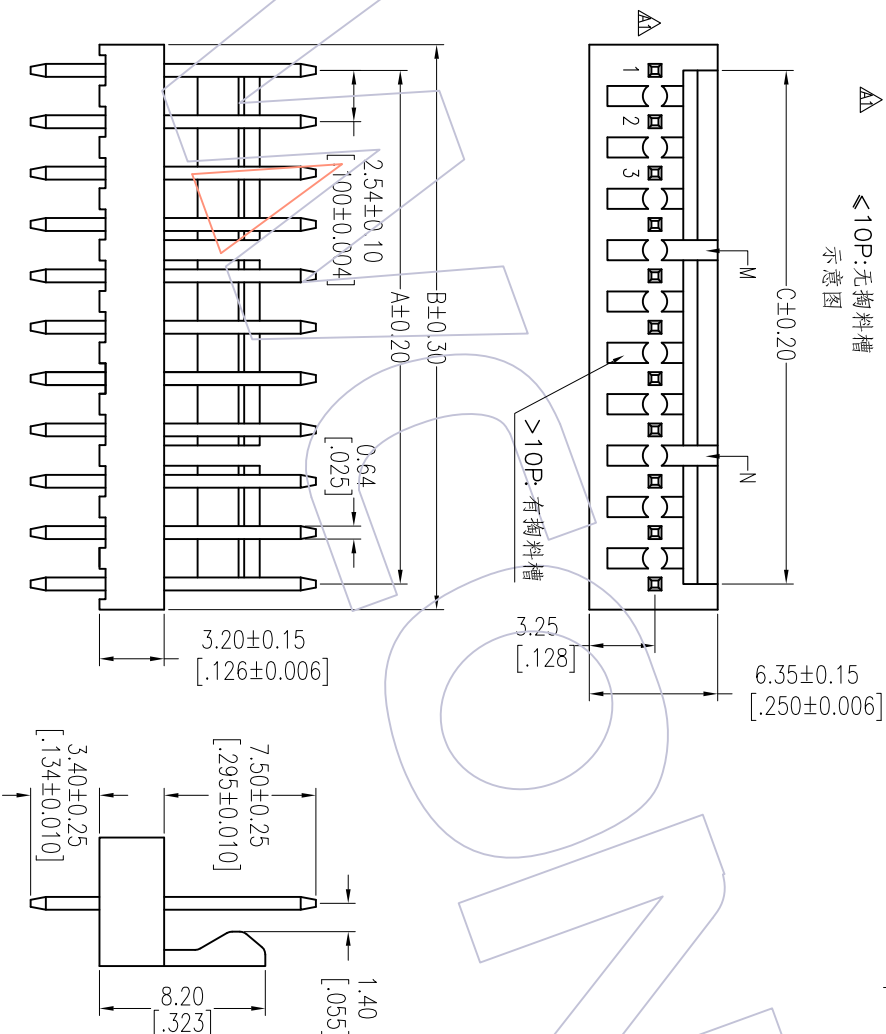

## Ordering Information

WF2546-WS XX XX W 0 X

No. of Pins Contact Plating Color Packing  
 02~20Pin  
 H=PA46  
 Blank=PA66

S=Gold Flash/Tin  
 SS=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 SS=30u"Gold/Tin  
 G0=Gold Flash  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 Blank=Tin

Circuit	Slot M	Slot N	Dimension			QTY/ bag
			A	B	C	
2~5P	None	None				
6~10P		None				
11~14P	Between Circuit4,5P					Between Circuit8,9P
15~18P						Between Circuit12,13P
19~20P						Between Circuit16,17P

### Dimensional & Ordering Information

Circuit	Part No.	Dimension			QTY/ bag
		A	B	C	
02	WF2546-WS02XXX	2.54	5.08	2.54	1,000
03	WF2546-WS03XXX	5.08	7.62	5.08	1,000
04	WF2546-WS04XXX	7.62	10.16	7.62	1,000
05	WF2546-WS05XXX	10.16	12.70	10.16	500
06	WF2546-WS06XXX	12.70	15.24	12.70	500
07	WF2546-WS07XXX	15.24	17.78	15.24	500
08	WF2546-WS08XXX	17.78	20.32	17.78	500
09	WF2546-WS09XXX	20.32	22.86	20.32	400
10	WF2546-WS10XXX	22.86	25.40	22.86	400
11	WF2546-WS11XXX	25.40	27.94	25.40	300
12	WF2546-WS12XXX	27.94	30.48	27.94	300
13	WF2546-WS13XXX	30.48	33.02	30.48	300
14	WF2546-WS14XXX	33.02	35.56	33.02	300
15	WF2546-WS15XXX	35.56	38.10	35.56	200
16	WF2546-WS16XXX	38.10	40.64	38.10	200
17	WF2546-WS17XXX	40.64	43.18	40.64	200
18	WF2546-WS18XXX	43.18	45.72	43.18	200
19	WF2546-WS19XXX	45.72	48.26	45.72	200
20	WF2546-WS20XXX	48.26	50.80	48.26	200

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408

Fax: +86 769 85358915  
 Fax: +86 512 57468468

E-mail: [sales@wcon.com](mailto:sales@wcon.com)  
 E-mail: [salesks@wcon.com](mailto:salesks@wcon.com)

PART NO. SEE TAB  
 TITLE: "M" TYPE 2.54 WAFER 180°  
 Customer NO.

OPERATION	SCALE	FIT	PROJ.
X.X	mm	1/1	
X.XX	A4		
X.XXX			
Angle	± 3°		
DIM	TOL		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2014/07/02	Modify The View	
AO	2012/09/08	NEW	

DRAW	DATE	SCALE	FIT
JYHuang	2014/07/02	mm	1/1
CHECK	DATE	SIZE	SHEET
		A4	1/1
APPROVE	DATE	PROJ.	

H  
G  
F  
E  
D  
C  
B  
A

H  
G  
F  
E  
D  
C  
B  
A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Wcon](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)