

HSF

NOTES:
 Rated Current: 3.0A
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/Minute
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C
 Insulator Material: PBT + 30%G.F UL94V-0
 Used with: WF2547-T
 Mated with: WF2547-Wafer


Ordering Information

WF2547 - 2 H XX X 0 1

No. of pins
02P-20P

Color
E=Beige
W=White
B=Black
U=Blue

Packing
0=PE Bag

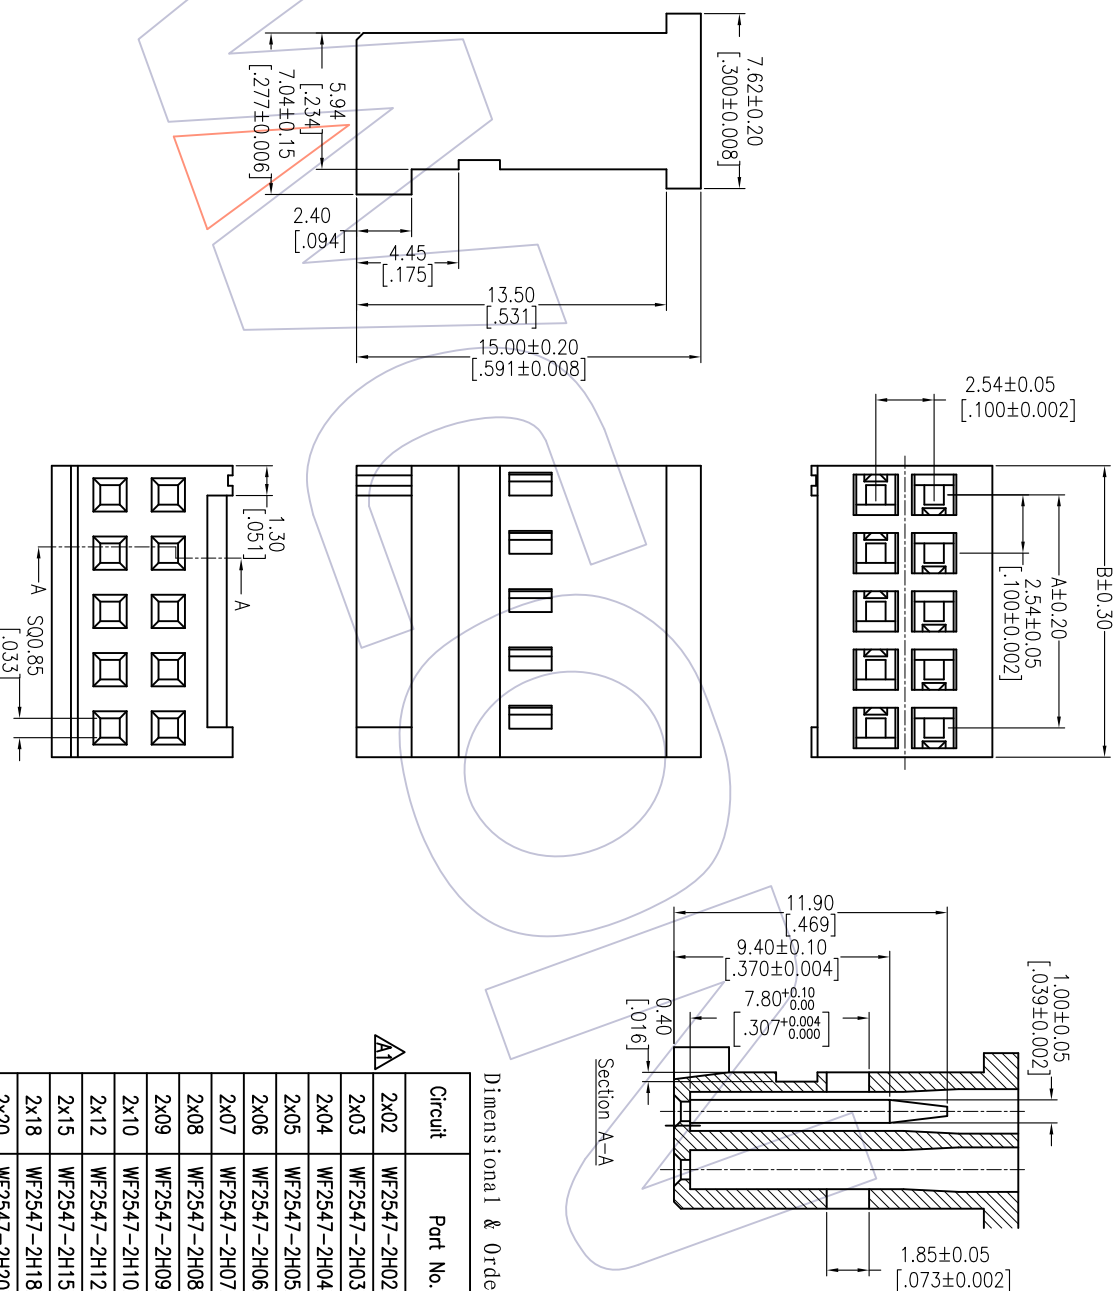

Dimensional & Ordering Information:

| Circuit | Part No. | Dimension | |
|---------|----------------|-----------|-------|
| | | A | B |
| 2x02 | WF2547-2H02X01 | 2.54 | 5.08 |
| 2x03 | WF2547-2H03X01 | 5.08 | 7.62 |
| 2x04 | WF2547-2H04X01 | 7.62 | 10.16 |
| 2x05 | WF2547-2H05X01 | 10.16 | 12.70 |
| 2x06 | WF2547-2H06X01 | 12.70 | 15.24 |
| 2x07 | WF2547-2H07X01 | 15.24 | 17.78 |
| 2x08 | WF2547-2H08X01 | 17.78 | 20.32 |
| 2x09 | WF2547-2H09X01 | 20.32 | 22.86 |
| 2x10 | WF2547-2H10X01 | 22.86 | 25.40 |
| 2x12 | WF2547-2H12X01 | 27.94 | 30.48 |
| 2x15 | WF2547-2H15X01 | 35.56 | 38.10 |
| 2x18 | WF2547-2H18X01 | 43.18 | 45.72 |
| 2x20 | WF2547-2H20X01 | 48.26 | 50.80 |

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
|-----|------------|--------------------------|--------|-----------|---------|------------|-------|-----|--------------------------------|
| A1 | 2013/11/14 | Add 2X02P Information | | X.X | JHuang | 2013/11/14 | mm | A4 | SEE TAB |
| AO | 2012/09/28 | NEW | | X.XXX | CHECK | | mm | A4 | 2.54 Housing Dual Row "T" Type |
| | | | | Angle | APPROVE | | SHEET | 1/1 | Customer NO. |
| | | | | DIM | | | PROJ. | | |

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)