

HSF

NOTES:

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -25°C to +85°C


Contact Material: Phosphor bronze
 Contact Plating: Au Or Sn Over Ni

刻“W”标示

Ordering Information

WF2548-TP XX 01

Material
 P=Phosphor Bronze
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

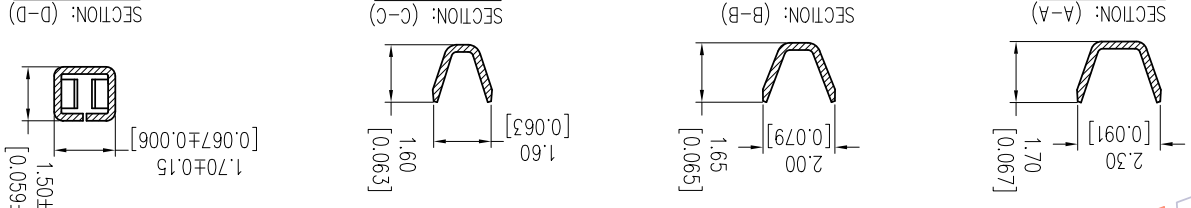

Dimensional & Ordering Information

Part No.	WF2548-TPXX01	Thickness	0.20	Finish	Tin	Material	Phosphor Bronze	Wire Range	AWG#26	Insulation O.D.	1.55mm(Max)
----------	---------------	-----------	------	--------	-----	----------	-----------------	------------	--------	-----------------	-------------

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.	CUSTOMER NO.	WCON-Donguan	WCON-Kunshan
A4	2018/08/14	Modify	OPERATION	X.X	Ding	2018/08/14	SCALE	PART NO.	WCON-Donguan	WCON-Kunshan
A3	2018/04/20	Modify	OPERATION	X.X	CHECK	2018/08/14	UNIT	TITLE:	WCON-Donguan	WCON-Kunshan
A2	2017/05/27	Modify	OPERATION	X.XXX	APPROVE	2018/08/14	SIZE	SEE TAB	WCON-Donguan	WCON-Kunshan
A0	2012/09/08	NEW	OPERATION	±.3	APPROVE	2018/08/14	SHEET	2.54mm TERMINAL FEMALE	WCON-Donguan	WCON-Kunshan
			CHANGE	Angle	DATE	DATE	SHEET	Customer NO.	WCON-Donguan	WCON-Kunshan
			CHANGE	±.3	DATE	DATE	PROJ.	Customer NO.	WCON-Donguan	WCON-Kunshan
			CHANGE	±.3	DATE	DATE	PROJ.	Customer NO.	WCON-Donguan	WCON-Kunshan

WCON
 Http://www.wcon.com

WCON-Donguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sdies@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sdiesks@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [66107-4-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#)