

HSF

NOTES:

Current Rating: 5.0 AMP
 Voltage Rating: 250V AC/DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1000V AC/Minute


Material: Phosphor Bronze
 Contact plating: Tin Over Ni

Ordering Information

WF3001-M T P XX 0X

Terminal Material
P: Phosphor Bronze

Contact Plating:
SN: Tin Plated

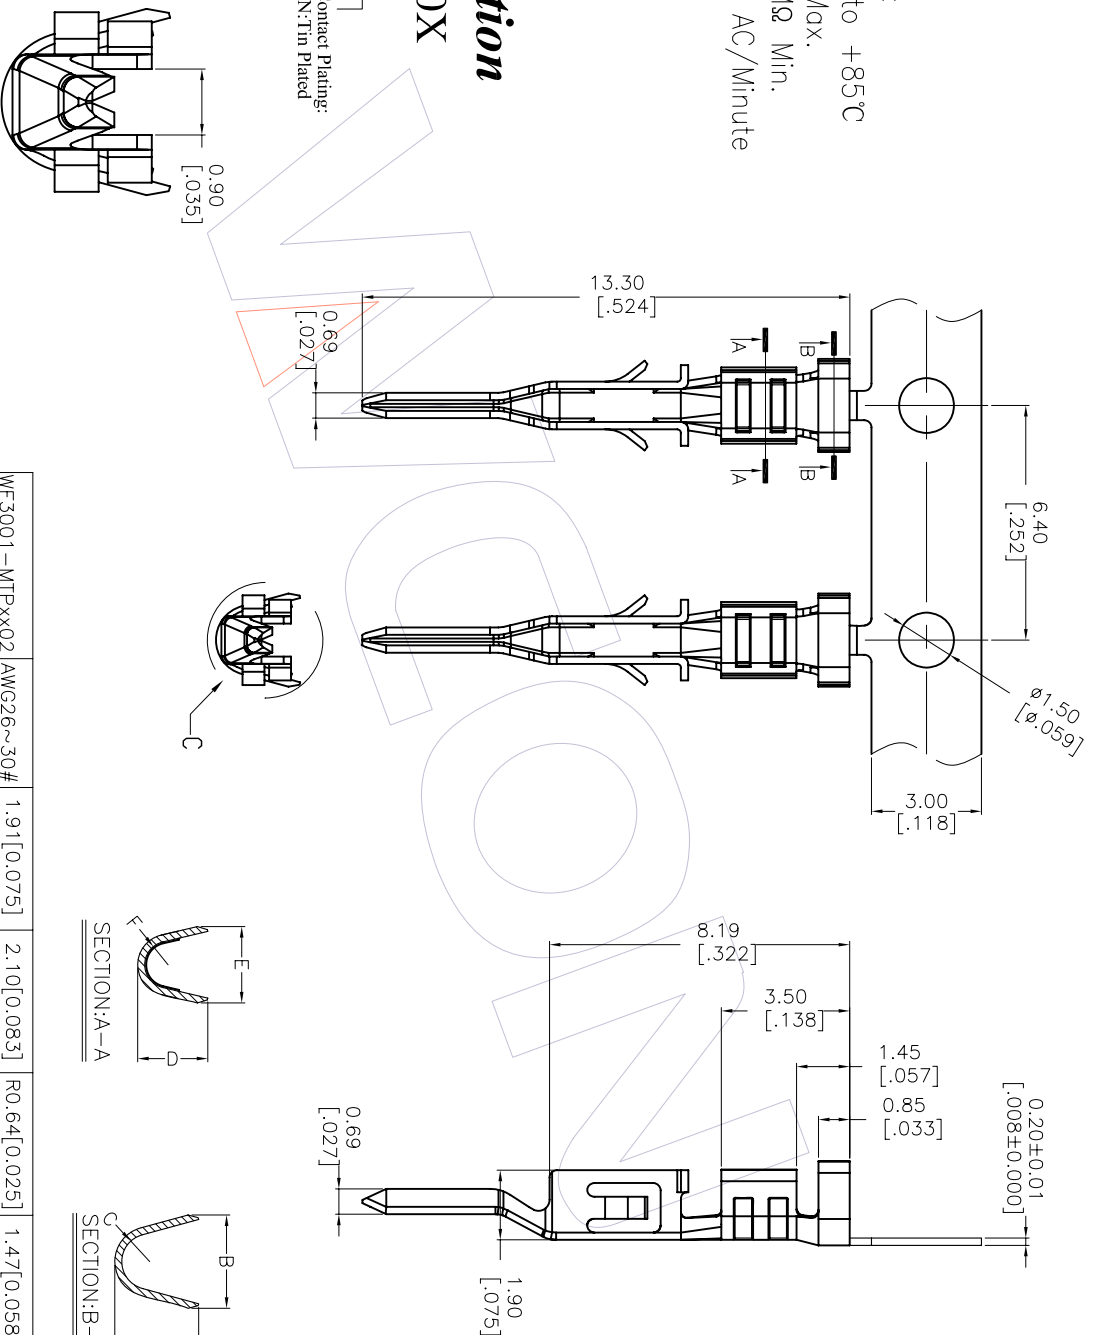

DETAIL:C(2X)

WF3001-MTPxX02	AWG26~30#	1.91[0.075]	2.10[0.083]	RO.64[0.025]	1.47[0.058]	1.65[0.065]	RO.51[0.020]
WF3001-MTPxX01	AWG20~24#	2.29[0.090]	2.54[0.100]	RO.76[0.030]	1.91[0.075]	2.08[0.082]	RO.64[0.025]
Part NO	Wire Range	A	B	C±0.13[±0.005]	D	E	F±0.13[±0.005]

OPERATION	DRAW	DATE	SCALE	PART NO.	WCON Http: www.wcon.com
X.X	LKP	2012.06.22	1:1	WF3001-MTPXX0X	
±0.40	CHECK	DATE	mm	TITLE:	
X.XX			inch	3.0 CRIMP MALE TERMINAL	
±0.25	APPROVE	DATE	A4	Customer NO.	
X.XXX			1/1		
±0.15			SHEET		
Angle			PROJ.		
± 3'					
DIM					
TOL					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.06.22	NEW	LKP
			DIM

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [66107-4-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#)