


NOTES:
 Rated Current:9.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:1500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25℃ to +85℃
 Insulator Material:PA66 UL94V-2
 Use with:WF4202-1 (Female Contact)

Ordering Information
 WF4202-1HXXW01

No.of pins
 Color
 Packing
 02P-05P W=White 0=PE Bag

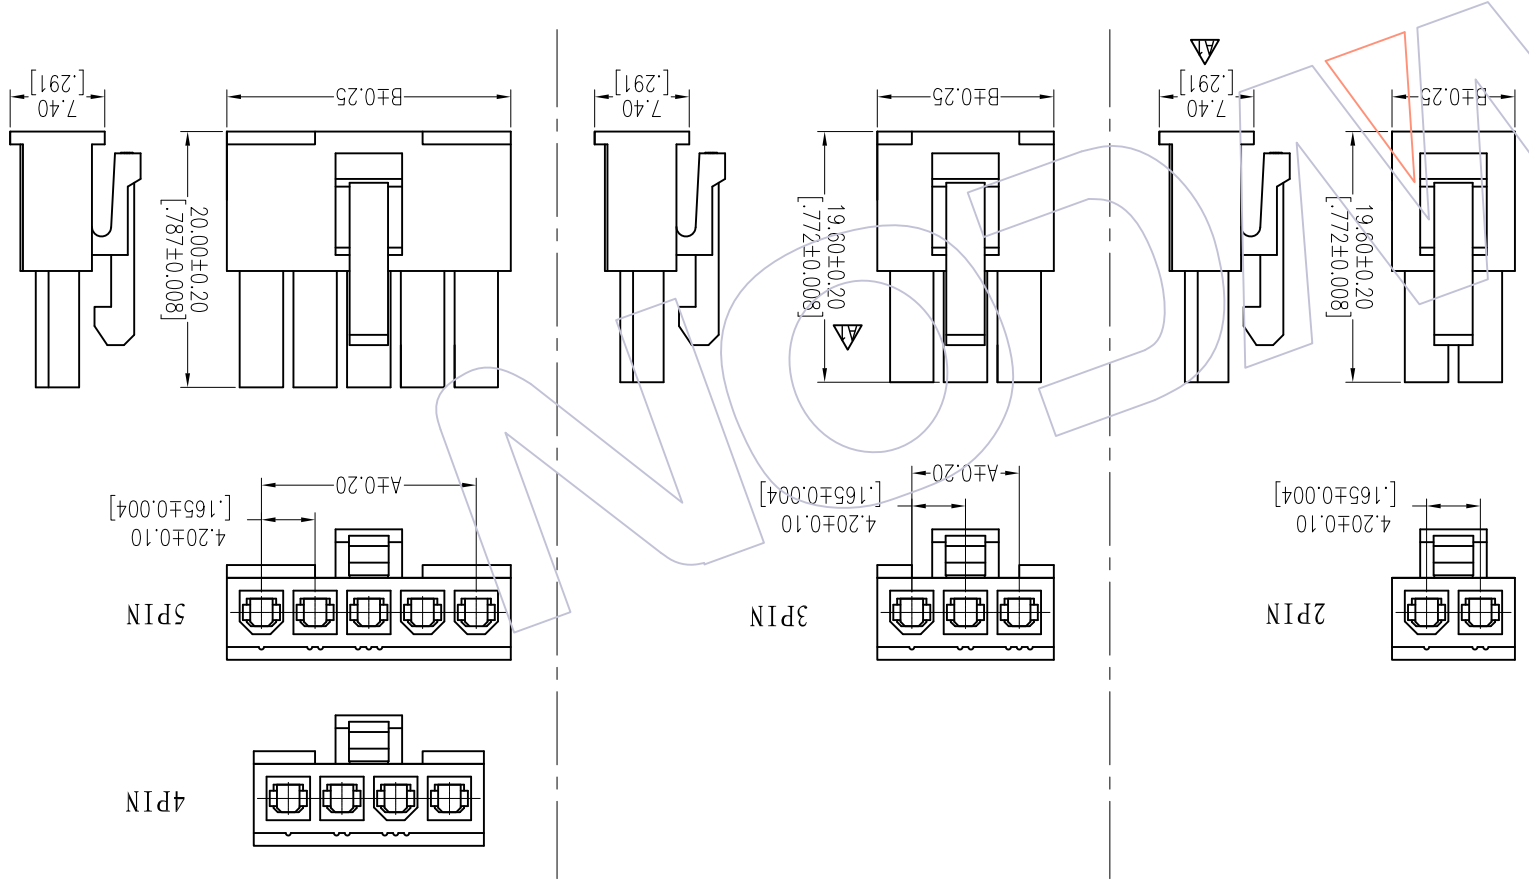

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF4202-1H02W01	4.20	9.60
03	WF4202-1H03W01	8.40	13.80
04	WF4202-1H04W01	12.60	18.00
05	WF4202-1H05W01	16.80	22.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	Customer NO.	WCON-Donguan	WCON-Kunshan
A0	2012/09/17	NEW	---	Angle	±.3	JYHuang	2015/06/25	PROJ.	Customer NO.	WCON-Donguan	WCON-Kunshan
A1	2015/06/24	Modify	---	X.xxx	±0.15			SHEET	Single Row Male	Tel: +86 769 85358920	Fax: +86 769 85358915
			---	X.xx	±0.25			SIZE	4.20mm Mini Fit Housing	Tel: +86 512 57468408	Fax: +86 512 57468468
			---	X.x	±0.40			UNIT	TITLE:	Http: www.wcon.com	
								SCALE	PART NO.	WCON	
								FIT	SBE TAB		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Wcon](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)