


产品型号: 17-MUB/-MUG

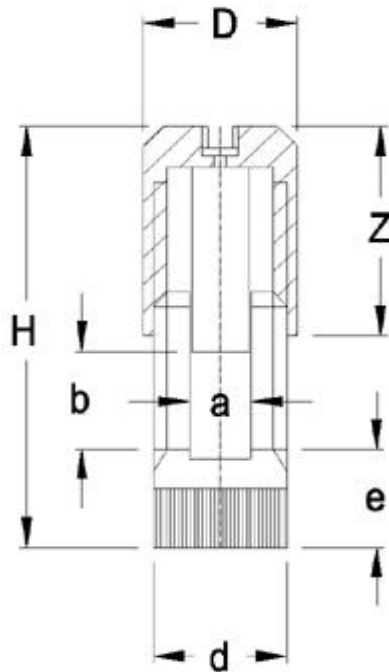

RoHS  
WEEE Pb  
free  
compliant

产品说明

Dimensions: mm (in.)

The grounding terminals were developed and patented by WECO. The upper section encompasses the lower section and thus prevents the limbs from bending outwards. The terminals guarantee a high degree of operational reliability and meet the requirements of the corresponding VDE regulations.

The flat clamping member which is mounted in the upper section in such a way that it can rotate reliably prevents damage to the wires. This design is thus particularly suitable for stranded conductors

Three base designs are available for different scopes of applications.

- Single Grounding Terminal
- Dual Wire Clamping
- Threaded Hole or Threaded Post
- With Locking Cap
- MU: with flat, stationary clamping mechanism

$$D = 8.0 (0.31)$$

$$d = 7.0 (0.28)$$

$$H = 22.0 (0.87)$$

$$Z = 11.0 (0.43)$$

$$e = 4.5 (0.18)$$

$$17\text{-MUB } h = n/a$$

$$g = M4$$

$$17\text{-MUG } h = 8.0 (0.31)$$

$$g = M4$$

Max. Terminal space a x b  
3.1 x 5.5 (0.12 x 0.22)

### 技术参数

额定截面: 2 x 4  
mm<sup>2</sup> (2 x 6199 mils<sup>2</sup>)

剥线长度: 9 mm  
(0.35 in.)

推荐工作电流: 39A

推荐线径: 2 x 12  
AWG

Base Style Options B: Threaded Hole G: Threaded Post

### 材料

M4, 黄铜镀镍


接线端子本  
体:

温度上限: 200°C

### 应用

螺帽: 黄铜镀镍  
螺纹孔或螺纹柱: M4

This design is thus particularly suitable for stranded conductors

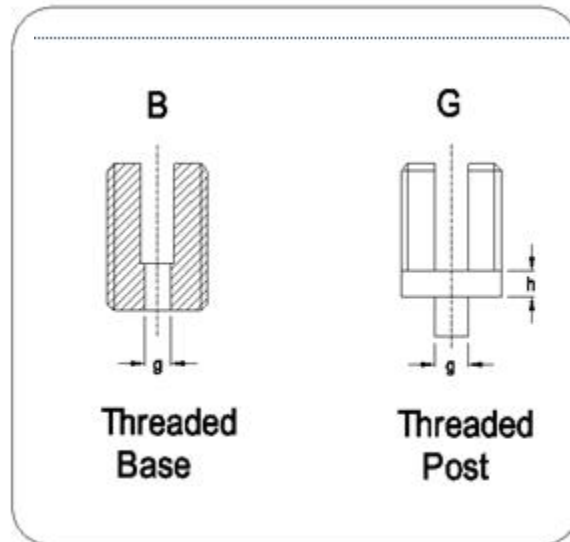

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Connector Accessories](#) category:*

*Click to view products by [Weco](#) manufacturer:*

Other Similar products are found below :

[89674-0712](#) [FERRULE-174](#) [R141802000](#) [R141842000](#) [R141862000W](#) [R280907000](#) [RFI75-3](#) [AX102907](#) [HP-500](#) [2098-3251-94](#) [KA-81-02](#)  
[KA-81-05](#) [KN-89-12](#) [89674-0805](#) [FERRULE-223](#) [202102-11](#) [R280468000](#) [R280510000](#) [RFI155-1](#) [RFI25-12-D3](#) [RFI25-4-D2](#) [RFI75-12-D2](#)  
[RFI97-14](#) [360HS001M2508M6](#) [4-1532137-4](#) [HRM-514S\(40\)](#) [5-21085-0](#) [111062-0490](#) [112122-SOD-LUG](#) [IPP-2014](#) [RFI95-14-D2](#) [MX-](#)  
[913/U\(45\)](#) [1736-1511-075](#) [RFI75-2-D3](#) [RFI25-3-D3](#) [R280469010](#) [RFI85-4](#) [896110450](#) [660-024M09S5-01](#) [1403137-1](#) [360HB001M2512H](#)  
[360HS001M1716M3](#) [380HS115M2508H3](#) [380HS001M1716M4](#) [FERRULE-316DB](#) [105274-2000](#) [73415-1970](#) [R280755050W](#) [52014041A](#)  
[R447120000](#)