



Jiangsu Weida Semiconductor Co.,Ltd


SMAJ Series 400W Transient Voltage Suppressor

DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

FEATURES:

- ◆ Low profile package.
- ◆ Low inductance.
- ◆ Excellent clamping capability.
- ◆ 400W peak pulse power capability at 10/1000 μ s waveform.
- ◆ Typical I_R less than 1 μ A above 10V.
- ◆ Fast response time: typically less than 1.0ps from 0V to V_{BR} min.
- ◆ High temperature to reflow soldering: 260 $^{\circ}$ C/40s at terminals.
- ◆ Plastic package has underwriters laboratory flammability 94V-0.
- ◆ For surface mounted applications in order to optimize board space.

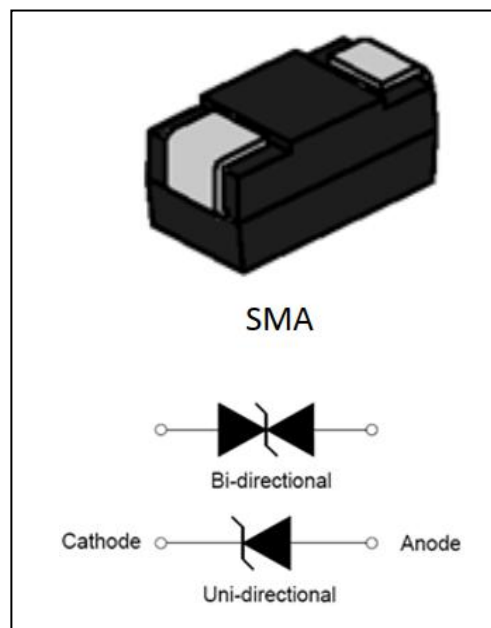

ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}$ C, RH=45%-75%, unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|-----------------|-------------|----------------|
| Storage operating junction temperature range | T_{STG} / T_J | -55 to +150 | $^{\circ}$ C |
| Steady state power dissipation at $T_L=75^{\circ}$ C | $P_{M(AV)}$ | 3.3 | W |
| Peak pulse power dissipation on 10/1000 μ s waveform | P_{PP} | 400 | W |
| Maximum instantaneous forward voltage at 50A for unidirectional | V_F | 5.0 | V |
| Peak forward surge current, 8.3ms single half sine wave(Note 1) | I_{FSM} | 60 | A |
| Typical thermal resistance junction to lead | $R_{\theta JL}$ | 30 | $^{\circ}$ C/W |
| Typical thermal resistance junction to ambient | $R_{\theta JA}$ | 120 | $^{\circ}$ C/W |

Notes: 1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum



Jiangsu Weida Semiconductor Co., Ltd

SMAJ Series 400W Transient Voltage Suppressor

ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$, continued)

| Part Number | | V_R | $I_R@V_R$ | $V_{BR}@I_T$ | | I_T | $V_C@I_{PP}$ | I_{PP} |
|-------------|-----------|-------|---------------|--------------|--------|-------|--------------|----------|
| Uni-Polar | Bi-Polar | V | μA | Min(V) | Max(V) | mA | Max(V) | A |
| SMAJ5.0A | SMAJ5.0CA | 5.0 | 120 | 6.40 | 7.00 | 10 | 9.2 | 43.5 |
| SMAJ6.0A | SMAJ6.0CA | 6.0 | 120 | 6.67 | 7.37 | 10 | 10.3 | 38.8 |
| SMAJ6.5A | SMAJ6.5CA | 6.5 | 120 | 7.22 | 7.98 | 10 | 11.2 | 35.7 |
| SMAJ7.0A | SMAJ7.0CA | 7.0 | 50 | 7.78 | 8.60 | 10 | 12.0 | 33.3 |
| SMAJ7.5A | SMAJ7.5CA | 7.5 | 50 | 8.33 | 9.21 | 1 | 12.9 | 31.0 |
| SMAJ8.0A | SMAJ8.0CA | 8.0 | 20 | 8.89 | 9.83 | 1 | 13.6 | 29.4 |
| SMAJ8.5A | SMAJ8.5CA | 8.5 | 10 | 9.44 | 10.40 | 1 | 14.4 | 27.8 |
| SMAJ9.0A | SMAJ9.0CA | 9.0 | 5 | 10.00 | 11.10 | 1 | 15.4 | 26.0 |
| SMAJ10A | SMAJ10CA | 10 | 2 | 11.10 | 12.30 | 1 | 17.0 | 23.5 |
| SMAJ11A | SMAJ11CA | 11 | 1 | 12.20 | 13.50 | 1 | 18.2 | 22.0 |
| SMAJ12A | SMAJ12CA | 12 | 1 | 13.30 | 14.70 | 1 | 19.9 | 20.1 |
| SMAJ13A | SMAJ13CA | 13 | 1 | 14.40 | 15.90 | 1 | 21.5 | 18.6 |
| SMAJ14A | SMAJ14CA | 14 | 1 | 15.60 | 17.20 | 1 | 23.2 | 17.3 |
| SMAJ15A | SMAJ15CA | 15 | 1 | 16.70 | 18.50 | 1 | 24.4 | 16.4 |
| SMAJ16A | SMAJ16CA | 16 | 1 | 17.80 | 19.70 | 1 | 26.0 | 15.4 |
| SMAJ17A | SMAJ17CA | 17 | 1 | 18.90 | 20.90 | 1 | 27.6 | 14.5 |
| SMAJ18A | SMAJ18CA | 18 | 1 | 20.00 | 22.10 | 1 | 29.2 | 13.7 |
| SMAJ20A | SMAJ20CA | 20 | 1 | 22.20 | 24.50 | 1 | 32.4 | 12.4 |
| SMAJ22A | SMAJ22CA | 22 | 1 | 24.40 | 26.90 | 1 | 35.5 | 11.3 |
| SMAJ24A | SMAJ24CA | 24 | 1 | 26.70 | 29.50 | 1 | 38.9 | 10.3 |
| SMAJ26A | SMAJ26CA | 26 | 1 | 28.90 | 31.90 | 1 | 42.1 | 9.5 |
| SMAJ28A | SMAJ28CA | 28 | 1 | 31.10 | 34.40 | 1 | 45.4 | 8.8 |
| SMAJ30A | SMAJ30CA | 30 | 1 | 33.30 | 36.80 | 1 | 48.4 | 8.3 |
| SMAJ33A | SMAJ33CA | 33 | 1 | 36.70 | 40.60 | 1 | 53.3 | 7.5 |
| SMAJ36A | SMAJ36CA | 36 | 1 | 40.00 | 44.20 | 1 | 58.1 | 6.9 |



Jiangsu Weida Semiconductor Co.,Ltd

SMAJ Series 400W Transient Voltage Suppressor

| Uni-Polar | Bi-Polar | V | μ A | Min(V) | Max(V) | mA | Max(V) | A |
|-----------|----------|-----|---------|--------|--------|----|--------|-----|
| SMAJ40A | SMAJ40CA | 40 | 1 | 44.40 | 49.10 | 1 | 64.5 | 6.2 |
| SMAJ43A | SMAJ43CA | 43 | 1 | 47.80 | 52.80 | 1 | 69.4 | 5.8 |
| SMAJ45A | SMAJ45CA | 45 | 1 | 50.00 | 55.30 | 1 | 72.7 | 5.5 |
| SMAJ48A | SMAJ48CA | 48 | 1 | 53.30 | 58.90 | 1 | 77.4 | 5.2 |
| SMAJ51A | SMAJ51CA | 51 | 1 | 56.70 | 62.70 | 1 | 82.4 | 4.9 |
| SMAJ54A | SMAJ54CA | 54 | 1 | 60.00 | 66.30 | 1 | 87.1 | 4.6 |
| SMAJ58A | SMAJ58CA | 58 | 1 | 64.40 | 71.20 | 1 | 93.6 | 4.3 |
| SMAJ60A | SMAJ60CA | 60 | 1 | 66.70 | 73.70 | 1 | 96.8 | 4.1 |
| SMAJ64A | SMAJ64CA | 64 | 1 | 71.10 | 78.60 | 1 | 103.0 | 3.9 |
| SMAJ70A | SMAJ70CA | 70 | 1 | 77.80 | 86.00 | 1 | 113.0 | 3.6 |
| SMAJ75A | SMAJ75CA | 75 | 1 | 83.30 | 92.10 | 1 | 121.0 | 3.3 |
| SMAJ78A | SMAJ78CA | 78 | 1 | 86.70 | 95.80 | 1 | 126.0 | 3.2 |
| SMAJ85A | SMAJ85CA | 85 | 1 | 94.40 | 104.0 | 1 | 137.0 | 2.9 |
| SMAJ90A | SMAJ90CA | 90 | 1 | 100.0 | 111.0 | 1 | 146.0 | 2.8 |
| SMAJ100A | SMAJ100C | 100 | 1 | 111.0 | 123.0 | 1 | 162.0 | 2.5 |
| SMAJ110A | SMAJ110C | 110 | 1 | 122.0 | 135.0 | 1 | 177.0 | 2.3 |
| SMAJ120A | SMAJ120C | 120 | 1 | 133.0 | 147.0 | 1 | 193.0 | 2.1 |
| SMAJ130A | SMAJ130C | 130 | 1 | 144.0 | 159.0 | 1 | 209.0 | 1.9 |
| SMAJ150A | SMAJ150C | 150 | 1 | 167.0 | 185.0 | 1 | 243.0 | 1.7 |
| SMAJ160A | SMAJ160C | 160 | 1 | 178.0 | 197.0 | 1 | 259.0 | 1.6 |
| SMAJ170A | SMAJ170C | 170 | 1 | 189.0 | 209.0 | 1 | 275.0 | 1.5 |
| SMAJ180A | SMAJ180C | 180 | 1 | 201.0 | 222.0 | 1 | 292.0 | 1.4 |
| SMAJ200A | SMAJ200C | 200 | 1 | 211.0 | 234.0 | 1 | 324.0 | 1.3 |
| SMAJ220A | SMAJ220C | 220 | 1 | 224.0 | 247.0 | 1 | 356.0 | 1.1 |
| SMAJ250A | SMAJ250C | 250 | 1 | 233.0 | 258.0 | 1 | 405.0 | 1.0 |
| SMAJ300A | SMAJ300C | 300 | 1 | 246.0 | 279.0 | 1 | 486.0 | 0.8 |
| SMAJ350A | SMAJ350C | 350 | 1 | 391.0 | 432.0 | 1 | 567.0 | 0.7 |



Jiangsu Weida Semiconductor Co.,Ltd

SMAJ Series 400W Transient Voltage Suppressor

| Uni-Polar | Bi-Polar | V | μA | Min(V) | Max(V) | mA | Max(V) | A |
|-----------|-----------|-----|---------------|--------|--------|----|--------|-----|
| SMBJ400A | SMBJ400CA | 400 | 1 | 447.0 | 494.0 | 1 | 648.0 | 0.6 |
| SMBJ440A | SMBJ440CA | 440 | 1 | 492.0 | 543.0 | 1 | 713.0 | 0.6 |

① Surge waveform: 10/1000 μs


V_R : Stand-off voltage -- Maximum voltage that can be applied

V_{BR} : Breakdown voltage

V_C : clamping voltage -- Peak voltage measured across the suppressor at a specified IPP

I_R : Reverse leakage current

ORDERING INFORMATION

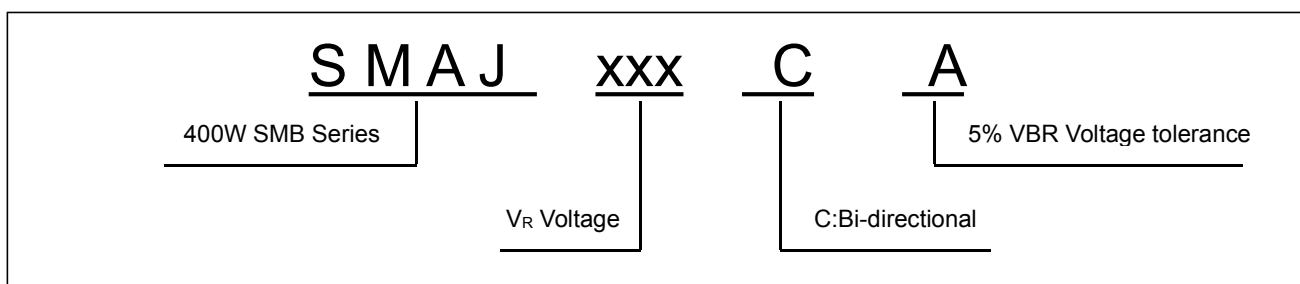

RATINGS AND V-I CHARACTERISTICS CURVES (TA=25°C, unless otherwise noted)

FIG.1:V-I curve characteristics (Uni-directional)


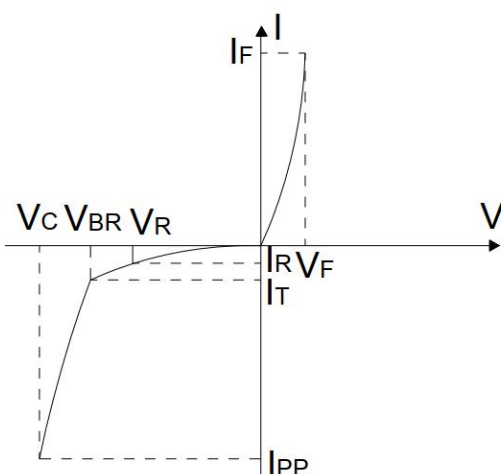


FIG.2:V- I curve characteristics (Bi-directional)



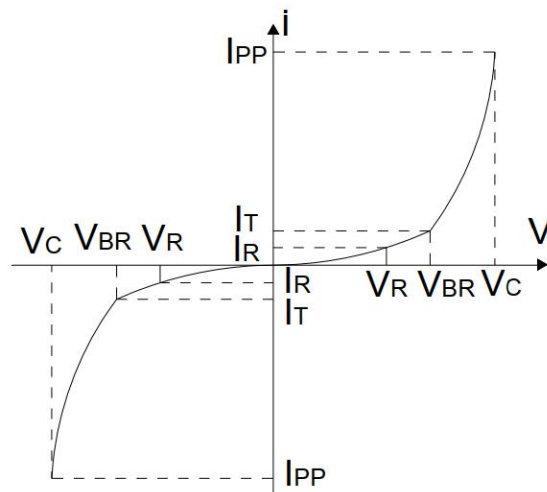

Jiangsu Weida Semiconductor Co.,Ltd

SMAJ Series 400W Transient Voltage Suppressor

FIG.3:Pulse waveform



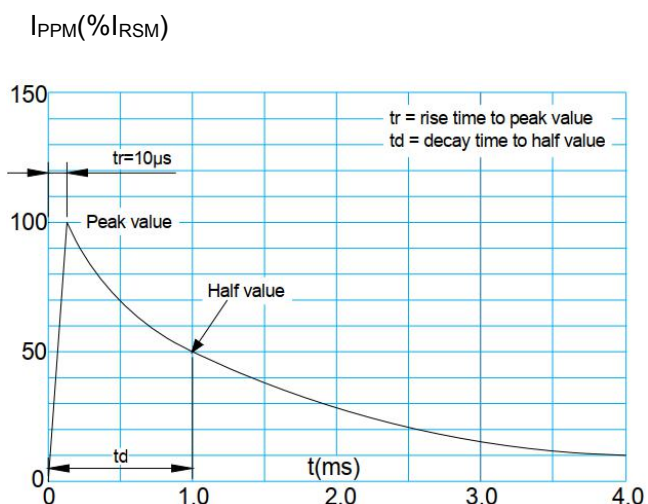


FIG.4:Pulse derating curve

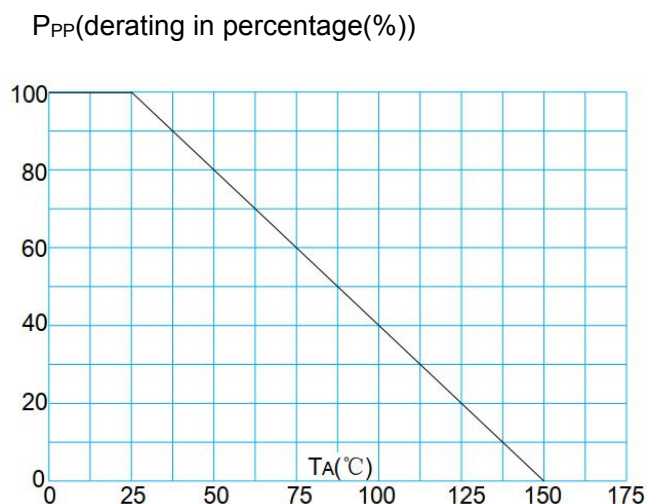

SOLDERING PARAMETERS

| | | |
|--|-----------------------------------|---|
| Reflow Condition | | Pb-Free assembly (see figure at right) |
| Pre Heat | -Temperature Min ($T_{s(min)}$) | +150°C |
| | -Temperature Max($T_{s(max)}$) | +200°C |
| | -Time (Min to Max) (t_s) | 60-180 secs. |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/sec. Max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max |
| Reflow | -Temperature(T_L)(Liquidus) | +217°C |
| | -Temperature(t_L) | 60-150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 20-40secs. |
| Ramp-down Rate | | 6°C/sec. Max |
| Time 25°C to Peak Temp (T_p) | | 8 min. Max |
| Do not exceed | | +260°C |

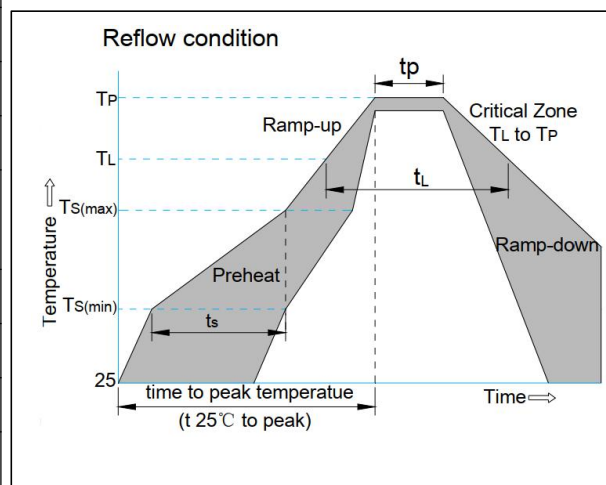




Jiangsu Weida Semiconductor Co., Ltd


SMAJ Series 400W Transient Voltage Suppressor

PACKAGE MECHANICAL DATA

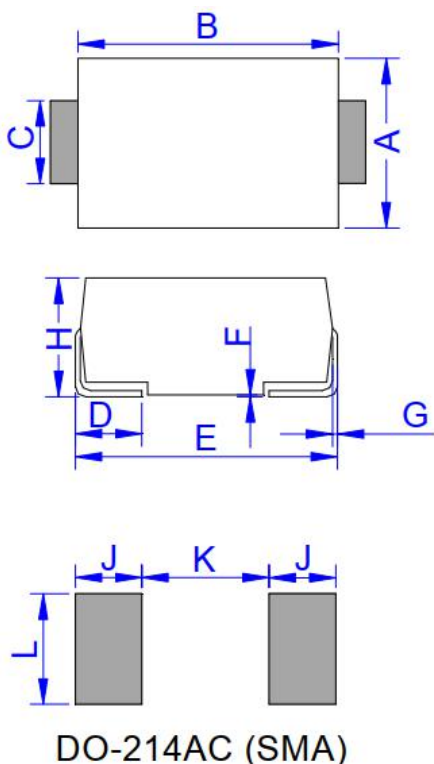

| Ref. | Dimensions | | | |
|------|-------------|-------|--------|-------|
| | Millimeters | | Inches | |
| | Min. | Max. | Min. | Max. |
| A | 2.60 | 3.00 | 0.102 | 0.118 |
| B | 4.15 | 4.65 | 0.163 | 0.183 |
| C | 1.25 | 1.65 | 0.049 | 0.065 |
| D | 0.95 | 1.52 | 0.037 | 0.060 |
| E | 4.90 | 5.30 | 0.193 | 0.209 |
| F | 0.051 | 0.203 | 0.002 | 0.008 |
| G | 0.15 | 0.31 | 0.006 | 0.012 |
| H | 2.00 | 2.44 | 0.079 | 0.096 |
| J | 2.00 | | 0.079 | |
| K | | 2.30 | | 0.091 |
| L | 1.80 | | 0.071 | |

TAPE AND REEL SPECIFICATION - SMB

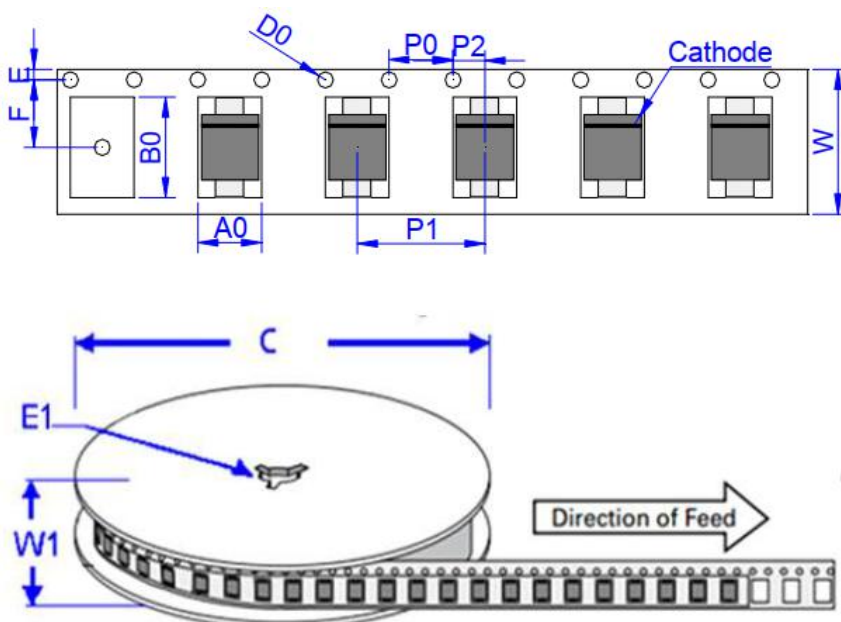

| Ref. | Dimensions | |
|------|-------------|---------------|
| | Millimeters | Inches |
| A0 | 2.79 ± 0.3 | 0.110 ± 0.012 |
| B0 | 5.33 ± 0.3 | 0.210 ± 0.012 |
| C | 330.0 | 13.0 |
| D0 | 1.55 ± 0.1 | 0.061 ± 0.004 |
| E | 1.75 ± 0.2 | 0.069 ± 0.008 |
| E1 | 13.3 ± 0.3 | 0.524 ± 0.012 |
| F | 5.5 ± 0.2 | 0.217 ± 0.008 |
| P0 | 4.00 ± 0.2 | 0.157 ± 0.008 |
| P1 | 4.00 ± 0.2 | 0.157 ± 0.008 |
| P2 | 2.00 ± 0.2 | 0.079 ± 0.008 |
| W | 12.0 ± 0.2 | 0.472 ± 0.008 |
| W1 | 15.7 ± 2.0 | 0.618 ± 0.079 |

| OUTLINE | UNIT WEIGHT (g/PCS) typ. | REEL (PCS) | PER CARTON (PCS) | REEL DIAMETERS (mm) |
|---------|-----------------------------|---------------|---------------------|---------------------------|
| TAPING | 0.067 | 5,000 | 80,000 | 330 |



Jiangsu Weida Semiconductor Co.,Ltd
SMAJ Series 400W Transient Voltage Suppressor

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu Weida Semiconductor Co., Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu Weida Semiconductor Co., Ltd complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu Weida Semiconductor Co., Ltd assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Weida Semiconductor](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)