

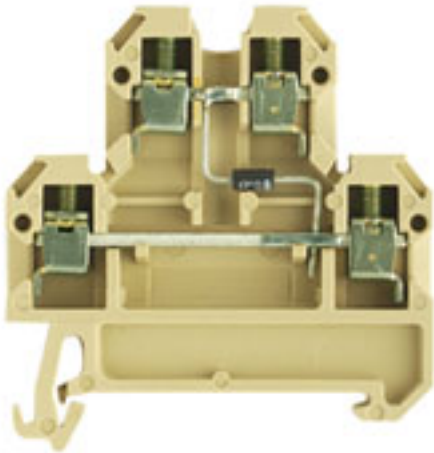
DK 4/35 1D A1**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Why not integrating simple electrical functions into a feed through terminal. It has the same slim design of our feed-through terminal blocks - with additional functions such as cross-connections that can be used. Often, you only need a small component to integrate an external device into your automation technology. Our modular terminal blocks with electronic components make this possible; quickly, simply, and with a perfect fit.

General ordering data

| | |
|------------|-------------------------------------------------------------------------------------------|
| Version | SAK Series, Component terminal, Rated cross-section: 4 mm ² , Screw connection |
| Order No. | 0538960000 |
| Type | DK 4/35 1D A1 |
| GTIN (EAN) | 4008 190032 128 |
| Qty. | 25 pc(s). |

Creation date September 15, 2022 8:16:43 PM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

DK 4/35 1D A1

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Depth | 52.5 mm | Depth (inches) | 2.067 inch |
| Height | 50 mm | Height (inches) | 1.969 inch |
| Width | 6 mm | Width (inches) | 0.236 inch |
| Net weight | 12.2 g | | |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 100 °C | | |

Environmental Product Compliance

| | | | |
|------------|----------------|------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1 | SCIP | e1c310ef-6b67-4efa-80a6-d307472f4de9 |
|------------|----------------|------|--------------------------------------|

Material data

| | | | |
|---------------------------|-------|--------|----------------|
| Material | PA 66 | Colour | beige / yellow |
| UL 94 flammability rating | V-2 | | |

System specifications

| | | | |
|-------------------------------------|------------------------------|-------------------------------|-----|
| Version | Screw connection, with diode | End cover plate required | Yes |
| Number of potentials | 2 | Number of levels | 2 |
| Number of clamping points per level | 2 | Number of potentials per tier | 1 |
| Levels cross-connected internally | No | PE connection | No |
| Rail | TS 35 | N-function | No |
| PE function | No | PEN function | No |

Additional technical data

| | | | |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | No | Number of similar terminals | 1 |
| Open sides | right | Type of mounting | Snap-on |

Conductors for clamping (rated connection)

| | | | |
|-----------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------|---------------------|
| Blade size | 0.6 x 3.5 mm | Clamping range, max. | 4 mm ² |
| Clamping range, min. | 0.33 mm ² | Clamping screw | M 3 |
| Connection cross-section, stranded, max. | 4 mm ² | Connection cross-section, stranded, min. | 0.5 mm ² |
| Connection direction | on side | Gauge to IEC 60947-1 | A3 |
| Number of connections | 4 | Stripping length | 9 mm |
| Tightening torque, max. | 0.8 Nm | Tightening torque, min. | 0.5 Nm |
| Torque level with DMS electric screwdriver | 2 | Type of connection | Screw connection |
| Wire connection cross section AWG, max. | AWG 12 | Wire connection cross section AWG, min. | AWG 22 |
| Wire connection cross section, finely stranded, max. | 4 mm ² | Wire connection cross section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 4 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

Creation date September 15, 2022 8:16:43 PM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

2

DK 4/35 1D A1

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions

| | |
|--------------|-------|
| TS 35 offset | 27 mm |
|--------------|-------|

General

| | | | |
|-----------------------------------------|--------|-----------------------------------------|--------|
| Rail | TS 35 | Wire connection cross section AWG, max. | AWG 12 |
| Wire connection cross section AWG, min. | AWG 22 | | |

Rating data

| | | | |
|----------------------------------------------|-------------------|---------------------------------------------|--------|
| Rated cross-section | 4 mm ² | Rated voltage | 380 V |
| Rated current | 10 A | Current at maximum wires | 10 A |
| Volume resistance according to IEC 60947-7-x | 1 mΩ | Power loss in accordance with IEC 60947-7-x | 1.02 W |
| Pollution severity | 3 | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000903 | ETIM 7.0 | EC000903 |
| ETIM 8.0 | EC000903 | ECLASS 9.0 | 27-14-11-27 |
| ECLASS 9.1 | 27-14-11-47 | ECLASS 10.0 | 27-14-11-27 |
| ECLASS 11.0 | 27-14-11-27 | ECLASS 12.0 | 27-14-11-27 |

Approvals

Approvals



| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | EAC certificate Declaration of Conformity CE Declaration of Conformity all terminals |
| Engineering Data | CAD data – STEP |
| Engineering Data | EPLAN, WSCAD |
| User Documentation | StorageConditionsTerminalBlocks |
| Catalogues | Catalogues in PDF-format |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Terminal Blocks](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[00110420202](#) [00175550302](#) [8WA1011-1BH23](#) [8WA1011-1EF20](#) [91.040](#) [9123140000](#) [RBO 5-T-B-HEX](#) [1333564](#) [DP25-GY-ND](#) [1431306](#)
[HSL-TB64-DIN](#) [90.070](#) [90.202](#) [912314](#) [260-301_NR](#) [2757571](#) [280-331](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#)
[283-317](#) [283-607](#) [2948995](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#) [284-601](#) [2907033](#) [5542152](#)
[35956](#) [USK 10](#) [102510](#) [5520682](#) [5607102](#) [EMH 25-ZE30](#) [591620-2](#) [UM 45-SEFE M.NUT BK](#) [1-591651-1](#) [8671050000](#) [264-706](#) [280-575](#)
[281-664](#) [592814-1](#)