

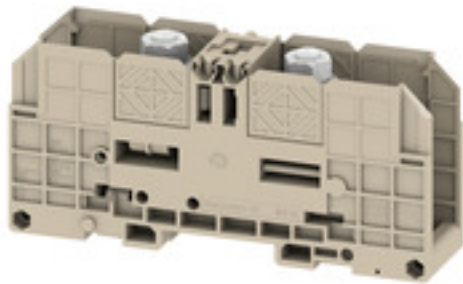
**WFF 70****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Klippon® Connect with stud Technology**

Our stud terminals are an established, robust connection alternative for particularly harsh environments. The extensive accessories and quality workmanship ensure high productivity in planning and installation – and sustainable safety in operation..

**General ordering data**

|            |  |
|------------|--|
| Version    | Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 70 mm <sup>2</sup> , Threaded stud connection |
| Order No.  | <a href="#">1028400000</a>   |
| Type       | WFF 70   |
| GTIN (EAN) | 4008190083311  |
| Qty.       | 10 pc(s).  |

Creation date January 12, 2022 3:42:52 PM CET

Catalogue status 17.12.2021 / We reserve the right to make technical changes.

## WFF 70

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 61 mm      | Depth (inches) | 2.402 inch |
| Depth including DIN rail | 69.5 mm    | Height         | 132 mm     |
| Height (inches)          | 5.197 inch | Width          | 31.8 mm    |
| Width (inches)           | 1.252 inch | Weight         | 176.5 g    |
| Net weight               | 157.464 g  |                |            |

## Temperatures

|                                  |                |                                  |   |
|----------------------------------|----------------|----------------------------------|---|
| Storage temperature              |                | Operating temperature range      | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity |
|                                  | -25 °C...55 °C |                                  |   |
| Continuous operating temp., min. | -50 °C         | Continuous operating temp., max. | 120 °C  |

## Material data

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

## Rating data IECEx/ATEX

|                             |   |                                 |                    |
|-----------------------------|---|---------------------------------|--------------------|
| Certificate No. (IECEX)     | IECEXULD15.0004U  | Max. voltage (IECEX)            | 1100 V             |
| Current (IECEX)             | 192 A   | Wire cross section max. (IECEX) | 70 mm <sup>2</sup> |
| Operating temperature range | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7              |                    |
| Ex 2014/34/EU label         | II 2 G D  |                                 | Ex eb II C Gb      |

## System specifications

|                                     |    |                                   |       |
|-------------------------------------|----|-----------------------------------|-------|
| End cover plate required            | No | Number of levels                  | 1     |
| Number of clamping points per level | 2  | Levels cross-connected internally | No    |
| PE connection                       | No | Rail                              | TS 35 |

## Additional technical data

|                          |        |                             |         |
|--------------------------|--------|-----------------------------|---------|
| Explosion-tested version | Yes    | Number of similar terminals | 1       |
| Open sides               | closed | Type of mounting            | Snap-on |

## CSA rating data

|                               |                |                               |        |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-1244019 | Current size C (CSA)          | 170 A  |
| Voltage size C (CSA)          | 600 V          | Wire cross section max. (CSA) | 00 AWG |
| Wire cross section min. (CSA) | 14 AWG         |                               |        |

## Conductors for clamping (rated connection)

|                           |                          |                                |                         |
|---------------------------|--------------------------|--------------------------------|-------------------------|
| 2 x cable lugs DIN 46 234 | 2.5...70 mm <sup>2</sup> | 2 x cable lugs DIN 46 235      | 16...70 mm <sup>2</sup> |
| Cable lug to DIN 46234    | 2.5...95 mm <sup>2</sup> | Cable lug to DIN 46235         | 16...70 mm <sup>2</sup> |
| Clamping range, max.      | 95 mm <sup>2</sup>       | Clamping range, min.           | 2.5 mm <sup>2</sup>     |
| Number of connections     | 2                        | Stud size for spade connection | M 8                     |
| Tightening torque, max.   | 12 Nm                    | Tightening torque, min.        | 6 Nm                    |
| Type of connection        | Threaded stud connection |                                |                         |

Creation date January 12, 2022 3:42:52 PM CET

Catalogue status 17.12.2021 / We reserve the right to make technical changes.

2

## WFF 70

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### General

Rail TS 35

### Rating data

|                                 |                    |  |         |
|---------------------------------|--------------------|--|---------|
| Rated cross-section             | 70 mm <sup>2</sup> | Rated voltage                                | 1,000 V |
| Rated DC voltage                | 1,000 V DC         | Rated current                                | 192 A   |
| Current at maximum wires        | 232 A              | Volume resistance according to IEC 60947-7-x | 0.17 mΩ |
| Rated impulse withstand voltage | 8 kV               | Power loss in accordance with IEC 60947-7-x  | 6.14 W  |
| Pollution severity              | 3                  |  |         |

### UL rating data

|   |        |   |        |
|---|--------|---|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 00 AWG |
| Conductor size Factory wiring min. (UR) | 14 AWG | Conductor size Field wiring max. (UR)   | 00 AWG |
| Conductor size Field wiring min. (UR)   | 14 AWG | Current size C (UR)                     | 175 A  |
| Voltage size C (UR)                     | 1000 V |   |        |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 |             |             |

### Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E60693  |

## WFF 70

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation of Conformity</a><br><a href="#">Attestation of Conformity</a><br><a href="#">EAC certificate</a><br><a href="#">DNVGL certificate</a><br><a href="#">MARITREG Certificate</a><br><a href="#">POLSKIREJ certificate</a><br><a href="#">CCC Ex Certificate</a><br><a href="#">ATEX Certificate</a><br><a href="#">IECEX Certificate</a><br><a href="#">CE Declaration of Conformity</a><br><a href="#">CE Declaration of Conformity all terminals</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>  |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>   |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a><br><a href="#">WFF range for 1500 VDC applications</a><br><a href="#">DIRECT MOUNTING WFF TERMINAL BLOCKS</a><br><a href="#">NTI WFF 70</a>  |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>   |
| Brochures                                   |  |

## WFF 70

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/5 MC NE WS           | Version   |
| Order No.  | <a href="#">1609801044</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190397111              | Weidmueller, white  |
| Qty.       | 1,000 pc(s).               |   |

## WF/WFF-Series



The additional connection enables a separate voltage tap. This can be used, for example, for the emergency power supply before the main switch or simply as an additional connection within the application.

## General ordering data

|            |                            |                                 |
|------------|----------------------------|---------------------------------|
| Type       | WZAF 70                    | Version                         |
| Order No.  | <a href="#">1066200000</a> | W-Series, Additional connection |
| GTIN (EAN) | 4008190169831              |                                 |
| Qty.       | 10 pc(s).                  |                                 |

## WFF 70

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | WEW 35/1                   | Version               |
| Order No.  | <a href="#">1059000000</a> | W-Series, End bracket |
| GTIN (EAN) | 4008190172282              |                       |
| Qty.       | 50 pc(s).                  |                       |

## Protective covers



Protective covers or protective caps are attached to the respective connection area of the terminal blocks. They provide protection against electric shock caused by accidental contact with live parts due to operation or faults.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WAP WFF70                  | Version  |
| Order No.  | <a href="#">1069800000</a> | Bolt-type screw terminals, cover plate, dark beige, 2 mm |
| GTIN (EAN) | 4008190022600              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | WAH 70 BE                  | Version  |
| Order No.  | <a href="#">1064560000</a> | Bolt-type screw terminals, Hood, beige, 31 mm            |
| GTIN (EAN) | 4008190174736              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | WAH 70 BL                  | Version  |
| Order No.  | <a href="#">1064580000</a> | Bolt-type screw terminals, Hood, blue, 31 mm             |
| GTIN (EAN) | 4008190107475              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | WAH 70 HG                  | Version  |
| Order No.  | <a href="#">1064550000</a> | Bolt-type screw terminals, Hood, Light green, 31 mm      |
| GTIN (EAN) | 4008190176976              |  |
| Qty.       | 20 pc(s).                  |  |
| Type       | WAH 70/KU                  | Version  |
| Order No.  | <a href="#">1070360000</a> | Bolt-type screw terminals, Hood, beige, 30.5 mm          |
| GTIN (EAN) | 4008190191054              |  |
| Qty.       | 20 pc(s).                  |  |

**WFF 70**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Accessories**

**Standard**



Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

**General ordering data**

|            |                           |  |
|------------|---------------------------|--|
| Type       | WQL 2 WFF70               | Version  |
| Order No.  | <a href="#">106500000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 2 |
| GTIN (EAN) | 4008190113933             |  |
| Qty.       | 5 pc(s).                  |  |
| Type       | WQL 3 WFF70               | Version  |
| Order No.  | <a href="#">106550000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 3 |
| GTIN (EAN) | 4008190174811             |  |
| Qty.       | 5 pc(s).                  |  |

**WF / WFF-Series**



A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

**General ordering data**

|            |                           |  |
|------------|---------------------------|--|
| Type       | WTW WFF70                 | Version  |
| Order No.  | <a href="#">106720000</a> | Bolt-type screw terminals, Partition plate, grey, 2 mm |
| GTIN (EAN) | 4008190186210             |  |
| Qty.       | 10 pc(s).                 |  |

## WFF 70

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

| Type       | WS 12/6.5 MC NE WS         | Version   |
|------------|----------------------------|---|
| Order No.  | <a href="#">1609920000</a> | WS, Terminal marker, 12 x 6.5 mm, Pitch in mm (P): 6.50 |
| GTIN (EAN) | 4008190203511              | Weidmueller, Allen-Bradley, white                       |
| Qty.       | 540 pc(s).                 |   |

## WS 12/6.5



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

| Type       | WS 12/6.5 MM WS            | Version  |
|------------|----------------------------|--|
| Order No.  | <a href="#">2619930000</a> | WS, Terminal marker, 12 x 6.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118626155              |  |
| Qty.       | 600 pc(s).                 |  |



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Terminal Blocks](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[00110420202](#) [8WA1011-1BH23](#) [8WA1011-1EF20](#) [91.010](#) [9102100000](#) [91.040](#) [9123140000](#) [9123140001](#) [RBO 5-T-B-HEX](#) [1333564](#) [DP25-GY-ND](#) [1431306](#) [1433306](#) [HSL-TB64-DIN](#) [90.070](#) [91.020](#) [912314](#) [260-301\\_NR](#) [2757571](#) [280-331](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [2909798](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#) [284-601](#) [2907033](#) [3048496](#) [5542152](#) [35956](#) [USK 10](#) [102510](#) [1025100000](#) [5520682](#) [5607102](#) [EMH 25-ZE30](#) [591620-2](#) [UM 45-SEFE](#) [M.NUT BK](#) [1-591651-1](#)