

## IE-SW-BL08-8TX

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

### Product image



- Variations with 5 or 8 ports
- Variations for Gigabit Ethernet
- Sturdy metal housing
- Compact design
- Two redundant power inputs 12/24/48 V DC
- Variations with copper and fibre-optic interface (multimode and singlemode)
- Extensive approvals: CE, FCC, cULus, Class I Div. 2 / ATEX Zone 2, DNV-GL

### General ordering data

Version	Network switch, unmanaged, Fast Ethernet, Number of ports: 8x RJ45, IP30, -10 °C...60 °C
Order No.	<a href="#">1240900000</a>
Type	IE-SW-BL08-8TX
GTIN (EAN)	4050118028911
Qty.	1 pc(s).

Creation date January 11, 2022 8:11:29 AM CET

Catalogue status 17.12.2021 / We reserve the right to make technical changes.

## IE-SW-BL08-8TX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	70 mm	Depth (inches)	2.756 inch
Height	114 mm	Height (inches)	4.488 inch
Width	50 mm	Width (inches)	1.969 inch
Net weight	275 g		

## Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-10 °C...60 °C
Humidity	5 to 95 % (non-condensing)		

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

## EMC conformity and approvals

EMC standards	EN 55032, EN 55024, CISPR 32, FCC Part 15 Subpart B Class A, IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV, IEC 61000-4-3 RS: 80 MHz to 1 Ghz: 10 V/m, IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV, IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV, IEC 61000-4-6 CS: 10 V, IEC 61000-4-8	Explosive risk zone	UL/cUL, Class I, Division 2, Groups A, B, C and D, ATEX Zone 2 Ex nA IIC T4 Gc
Free fall	According to IEC 60068-2-32	Safety standard	UL508
Ship use	DNV-GL	Shock	according to IEC 60068-2-27
Vibration	according to IEC 60068-2-6		

## Environmental conditions

Humidity	5 to 95 % (non-condensing)	Operating temperature, max.	60 °C
Operating temperature, min.	-10 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C		

## Guarantee

Time interval	5 years
---------------	---------

## Interfaces

Function DIP switch	1x for enabling/disabling the broadcast storm protection	LED indicator	PWR1, PWR2, 10/100M (TP-Port)
Number of ports	8x RJ45	RJ45 ports	10/100BaseT(X), auto negotiation, Full-/half-duplex mode, Auto MDI/MDI-X port

Creation date January 11, 2022 8:11:29 AM CET

Catalogue status 17.12.2021 / We reserve the right to make technical changes.

2

**IE-SW-BL08-8TX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****MTBF**

MTBF	According to Standard	Telcordia (Bellcore), GB
	Operating time (hours), min.	2,701,531 h

**Power supply**

Connection type	1 removable 4-pin terminal block	
Current consumption	0.13 A at 24 V	
Overload current protection	1.1 A	
Reverse polarity protection	Available	
Voltage supply	12/24/48 V DC, 2 redundant inputs	
Voltage supply range	Voltage type	DC
	Voltage, min.	9.6 V
	Voltage, max.	60 V

**Switch characteristics**

Bandwidth backplane	1.6 Gbps	MAC table size	2 K
Packet buffer size	768 Kbit		

**Technical data**

Housing main material	Aluminium	Protection degree	IP30
Speed	Fast Ethernet	Switch	unmanaged
Type of mounting	DIN rail, Panel (with optional mounting kit)		

**Technology**

Data switching	Store and Forward	Flow control	IEEE 802.3x flow control, Back pressure flow control
Standard	IEEE 802.3 for 10BaseT, IEEE 802.3u for 100BaseT(X), IEEE 802.3x for flow control		

**Classifications**

ETIM 6.0	EC000734	ETIM 7.0	EC000734
ETIM 8.0	EC000734	ECLASS 9.0	19-17-01-06
ECLASS 9.1	19-17-01-06	ECLASS 10.0	19-17-04-02
ECLASS 11.0	19-17-04-02		

## IE-SW-BL08-8TX


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

# Technical data

### Approvals

Approvals

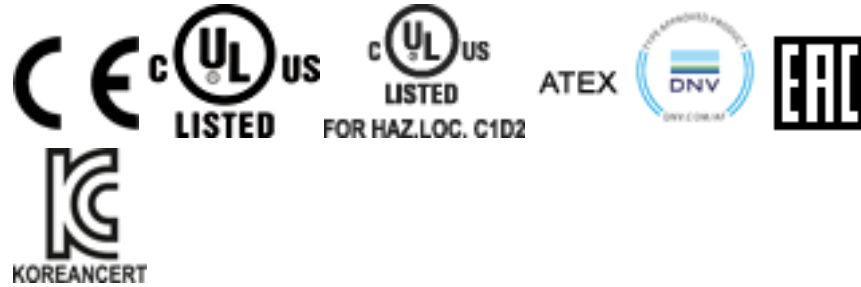

ROHS	Conform
UL File Number Search	E230683

### Downloads

Approval/Certificate/Document of Conformity	<a href="#">DNV-GL certificate</a> <a href="#">ATEX certificate</a> <a href="#">KC certificate</a> <a href="#">EU Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Product Change Notification	<a href="#">Product Change Notification IE-SW-BL08-series</a>
User Documentation	<a href="#">Hardware Installation Guide</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

## IE-SW-BL08-8TX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Accessories

### Ethernet (Cat.6)




- Suitable for Cat. 5 (up to 100 MHz) and Cat. 6 (up to 250 MHz Class E)
- Suitable for PoE+ (according to IEEE 802.3at, IEEE 802.3bt Type 3 and 4)
- Protection of all wire pairs
- Connection via RJ45 sockets
- Metal housing

### General ordering data

Type	VDATA CAT6	Version
Order No.	<a href="#">1348590000</a>	Terminal rail fixing, Surge protection, Cat.6, 802.3 at Type 1, 802.3 at
GTIN (EAN)	4050118153002	Type 2, 802.3 bt Type 3, $U_p(L/N-PE) \leq 550$ V
Qty.	1 pc(s).	

### Mounting kit for wall mounting



Mounting kit for alternative wall-mounting of DIN rail-based (top-hat type) Industrial Ethernet components.

**IE-WALLMOUNT-KIT-30MM** for use with:

- Industrial Ethernet Switches of the product range **IE-SW-BL05**

**IE-WALLMOUNT-KIT-46MM** for use with:

- Industrial Ethernet Switches of the product ranges **IE-SW- BL06/BL08/VL05/VL08/VL09/VL16/PL06/PL08/PL09/PL10/PL16/PL18**
- Industrial Ethernet media converters of the product range **IE-MC-VL**
- Industrial Ethernet switches of the product range **IE-WL-AP**

### General ordering data

Type	IE-WALLMOUNT-KIT-46MM
Order No.	<a href="#">1504440000</a>
GTIN (EAN)	4050118312317
Qty.	1 pc(s).

**IE-SW-BL08-8TX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Accessories****Mounting kit for 19" rack assembly**

- For assembling DIN rail-based devices on 19" racks

**General ordering data**

Type	RM-KIT	Version
Order No.	<a href="#">1241440000</a>	Kit for 19"-rack mounting
GTIN (EAN)	4050118029154	
Qty.	1 pc(s).	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)  
[EXTENDER 2001 ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [BCM54291B0IQLEG](#) [7000-P3201-P050150](#) [750-1415](#) [750-494](#) [750-495](#) [750-612](#)  
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)  
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)  
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [SW-125](#) [SW-525](#) [SW-725](#) [1005957](#) [1006191](#) [304TX-N](#) [WIZ107SR\\_TTL](#) [ES-320](#)  
[TDKEZW5](#)