

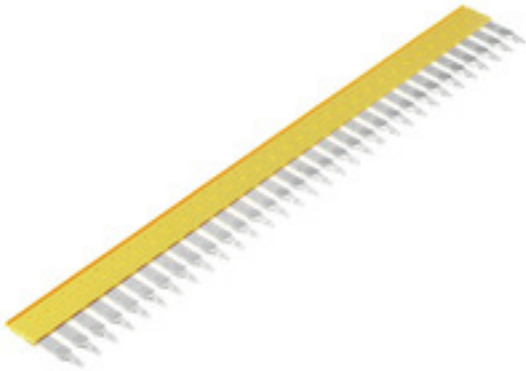
ZQV 6/32 GE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

Version	Accessories, Cross-connector, 41 A
Order No.	1733640000
Type	ZQV 6/32 GE
GTIN (EAN)	4008 190994334
Qty.	10 pc(s).

ZQV 6/32 GE**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	33.96 mm	Depth (inches)	1.337 inch
Height	257.3 mm	Height (inches)	10.13 inch
Width	3.1 mm	Width (inches)	0.122 inch
Net weight	45.6 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60
Continuous operating temp., max.	130		

Material data

Material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Installation advice	Direct mounting	Type of fixing	Plugged
---------------------	-----------------	----------------	---------

Cross-connector

Number of cross-connected terminals	32	Rated current, 2-pole	41 A
Rated current, multi-pole	41 A	Type	Cross-connector

Dimensions

Pitch in mm (P)	8.1 mm
-----------------	--------

General

Installation advice	Direct mounting	Number of poles	32
---------------------	-----------------	-----------------	----

Rating data

Rated current	41 A
---------------	------

Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ECLASS 9.0	27-14-11-40
ECLASS 9.1	27-14-11-40	ECLASS 10.0	27-14-11-40
ECLASS 11.0	27-14-11-40	ECLASS 12.0	27-14-11-40

Important note

Product information	Attention: not finger-safe; not suitable for ATEX use Due to stability and temperature reasons It is only possible to break out 60% of contact elements The usage of cross connectors reduces the rated voltage to 400V The voltage reduced to 25V if cut cross connection with blank cut edges are used
---------------------	--

ZQV 6/32 GE

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of
 Conformity

[EAC certificate](#)

Engineering Data

[CAD data – 26925_ZQV_6-32_GE_DXF.dxf](#)
[CAD data – STEP](#)

Engineering Data

[EPLAN_WSCAD_Zuken E3.S](#)

User Documentation

[Operating instructions_ZDU1.5-ZDU35_ZQV.pdf](#)
[StorageConditionsTerminalBlocks](#)
[BPZL_ZQV 2.5](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminal Blocks - Unspecified](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[262-103](#) [5606874](#) [BM5219](#) [1SNL312510R0000](#) [1SNL316010R0000](#) [5310100000024](#) [5310100000014](#) [LZW-B4.2](#) [A12-4160](#) [LZW-B4.6](#)
[A12-4660](#) [FCR7900](#) [FCR79001](#) [88486403](#) [ESKW 1/5 ST E3](#) [88486708](#) [ESKW 1/5 KU](#) [88838208](#) [ESKW 1/2 KU](#) [88838304](#) [ESKW 1/2 ST](#)
[PDBFS377](#) [260-112](#) [264-364](#) [1527880000](#) [1528230000](#) [LZW-B4.3](#) [A12-4260](#) [294-4013](#) [HDFK 25 0707743](#) [HDFK 4 0707086](#) [E.4203](#)
[TSCB4-02P-15-01AH](#) [862-505](#) [TSCB4-01P-15-01AH](#) [TSCB4-03P-15-01AH](#) [5310100000002](#) [5310100000005](#) [5310100000012](#)
[5310100000026](#) [5310200000004](#) [5310200000016](#) [1754220000](#) [294-4002](#) [E.4204](#) [SLK3/2/D1-D2](#) [88167524](#) [262-142](#) [264-112](#) [294-4003](#)
[FCR7901](#) [FCR79011](#) [PDBFS220](#) [PDBFS330](#) [BM22](#) [BM23](#) [BM2300](#) [BM2301](#)