

SAISM 5/8S M12 5P B-COD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly.

Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The screw connection can be used in a wide range of applications. With this technology the conductor, optionally with wire-end ferrules, can be plugged into connection elements and secured with a screw. It is the classic, cheapest form of connection technology that also supports multi-conductor connections.

General ordering data

Version	Field attachable connector, M12, pin, straight
Order No.	1784790000
Type	SAISM 5/8S M12 5P B-COD
GTIN (EAN)	4032248191871
Qty.	1 pc(s).

Creation date September 16, 2022 11:26:51 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

SAISM 5/8S M12 5P B-COD

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 46 g

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1, Imidazolidine-2-thione 96-45-7	SCIP	bcee35cf- c0f5-43d2-8daf-65ab0d08641a
------------	--	------	--

Technical data customisable plug-in connectors

Cable diameter	6...8 mm (PG9)	Cable diameter, max.	8 mm
Cable diameter, min.	6 mm	Coding	B
Conductor cross-section, max.	0.75 mm ²	Conductor cross-section, min.	0.14 mm ²
Connection cross-section, max.	0.75 mm ²	Connection cross-section, min.	0.14 mm ²
Contact surface	Gold-plated	Housing main material	CuZn
Insulation strength	10 ⁸ Ω	Number of poles	5
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP67	Rated current	4 A
Rated voltage	60 V	Rated voltage	60 V
Shield connection	Yes	Temperature range of housing	-40 ... +85 °C
Threaded ring material	Diecast zinc	Type of connection	Screw connection

General Info

Connection 1	M12	Connection 2	Screw
Description of article	SAISM / SAIBM	Housing main material	CuZn
Connection thread	M12	Contact surface	Gold-plated
Protection degree	IP67	Plugging cycles	≥ 100

Standards

Connector standard IEC 61076-2-101

Classifications

ETIM 6.0	EC002635	ETIM 7.0	EC002635
ETIM 8.0	EC002635	ECLASS 9.0	27-44-01-02
ECLASS 9.1	27-44-01-03	ECLASS 10.0	27-44-01-02
ECLASS 11.0	27-44-01-02	ECLASS 12.0	27-44-01-16

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E307231

SAISM 5/8S M12 5P B-COD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Downloads**

Engineering Data	CAD data – STEP
Engineering Data	WSCAD
User Documentation	Manual
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN


SAISM 5/8S M12 5P B-COD

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Pole scheme

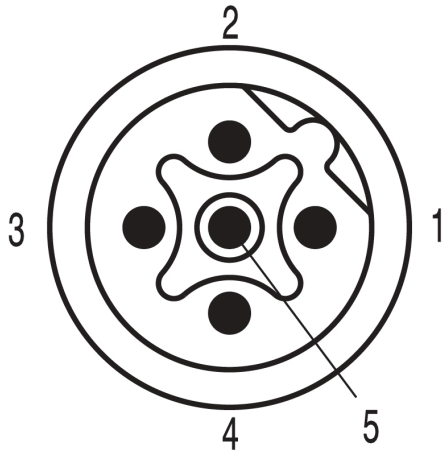

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1746952](#) [1760336](#) [1809474](#) [1855000000](#) [19346](#) [1946309](#) [1950227](#) [1973592](#) [19892](#) [21.310.1253.2](#)
[25.193.0303.0](#) [25.320.1353.1](#) [25.320.4053.1](#) [25.320.4553.9](#) [25.320.4753.1](#) [25.320.5453.1](#) [25.326.3453.1](#) [25.330.1353.1](#) [25.330.4853.1](#)
[25.330.5153.1](#) [25.330.5353.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.600.4053.0](#) [25.640.3553.1](#) [SH02-5,08](#)