

## HDC 48A TSLU 1M32G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

### General ordering data

|            |  |
|------------|--|
| Version    | HDC enclosures, Size: 9, Protection degree: IP65 (in plugged condition), Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 32 |
| Order No.  | <a href="#">1788550000</a>   |
| Type       | HDC 48A TSLU 1M32G   |
| GTIN (EAN) | 4032248206087  |
| Qty.       | 1 pc(s).   |

## HDC 48A TSLU 1M32G

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |         |                 |            |
|------------|---------|-----------------|------------|
| Height     | 79 mm   | Height (inches) | 3.11 inch  |
| Width      | 82.5 mm | Width (inches)  | 3.248 inch |
| Net weight | 410 g   |                 |            |

## Temperatures

|                   |                   |
|-------------------|-------------------|
| Limit temperature | -40 °C ... 125 °C |
|-------------------|-------------------|

## Environmental Product Compliance

|                     |                                      |                         |
|---------------------|--------------------------------------|-------------------------|
| REACH SVHC          | Lead 7439-92-1                       |                         |
| SCIP                | d447edfa-0214-4f34-b5ba-82eae491b46a |                         |
| Chemical resistance | Substance                            | Acetone                 |
|                     | Chemical resistance                  | Conditionally resistant |
|                     | Substance                            | Drilling oil            |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Diesel                  |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Ethyl alcohol           |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Transmission oil        |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Hydraulic oil           |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Coolant                 |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Petroleum benzine       |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Sweat                   |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | Premium gasoline        |
|                     | Chemical resistance                  | Conditionally resistant |
|                     | Substance                            | Water                   |
|                     | Chemical resistance                  | Resistant               |
|                     | Substance                            | UV                      |
|                     | Chemical resistance                  | Unstable                |
|                     | Substance                            | Ozone                   |
|                     | Chemical resistance                  | Unstable                |

## Dimensions

|                      |           |                     |         |
|----------------------|-----------|---------------------|---------|
| Cable entry          | w. thread | Height of housing B | 78 mm   |
| Total length housing | 94 mm     | Width housing C     | 82.5 mm |

## General data

|                             |                             |                       |                             |
|-----------------------------|-----------------------------|-----------------------|-----------------------------|
| EMC housings                | No                          | Housing main material | diecast aluminium           |
| Material of locking element | Stainless steel, rust-proof | Protection degree     | IP65 (in plugged condition) |
| Surface finish              | Powder coating              | Tightening torque     | 2 Nm                        |

## HDC 48A TSLU 1M32G

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Version

|                              |                               |                                |                                     |
|------------------------------|-------------------------------|--------------------------------|-------------------------------------|
| BG                           | 9                             | Cable entry                    | w. thread                           |
| Clamp version                | End-locking clamp             | Colour (RAL)                   | RAL 7035                            |
| Design                       | Standard                      | Design of housing              | Cable entry from side, Plug housing |
| Design of locking system     | End-locking clamp, lower side | Internal thread                | M 32                                |
| Number of cable entry on top | 0                             | Number of cable entry sideways | 1                                   |
| Size                         | 9                             | Size of cable entries          | M 32                                |
| Suitable for ModuPlug®       | No                            | Tightening torque              | 2 Nm                                |
| Top part/bottom part/lid     | upper part                    | Type                           | Plug                                |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000437    | ETIM 7.0    | EC000437    |
| ETIM 8.0    | EC000437    | ECLASS 9.0  | 27-44-02-02 |
| ECLASS 9.1  | 27-44-02-02 | ECLASS 10.0 | 27-44-02-02 |
| ECLASS 11.0 | 27-44-02-02 | ECLASS 12.0 | 27-44-02-02 |

### Approvals

Approvals



ROHS Conform

### Downloads

|                             |  |
|-----------------------------|--|
| Engineering Data            | <a href="#">CAD data – STEP</a>  |
| Engineering Data            | <a href="#">EPLAN_WSCAD</a>  |
| Product Change Notification | <a href="#">20220214 Technical change to HDC housings</a><br><a href="#">20220214 Technische Änderung bei HDC-Gehäusen</a> |
| Technical Documentation     | <a href="#">1788550000 HDC_48A_TSLU_1M32G_STP_Blatt_1.pdf</a>  |
| Catalogues                  | <a href="#">Catalogues in PDF-format</a>   |
| Brochures                   | <a href="#">FL FIELDWIRING EN</a><br><a href="#">FL FIELDWIRING EN</a>   |


**Data sheet**

**HDC 48A TSLU 1M32G**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

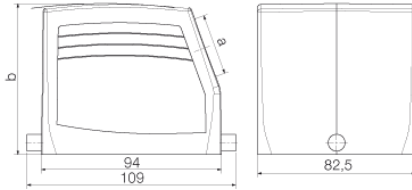

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heavy Duty Power Connectors](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[6646058-2](#) [6646137-1](#) [6646138-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [696475-1](#) [702-32-01109](#) [73080255059](#) [73080965046](#)  
[7310205040001](#) [765-16-0080B](#) [765-18-0080D](#) [902-77-02113](#) [PS00/A0620/6300](#) [AN0024023](#) [154-42B7WM250](#) [MS3117-14AC](#) [1643543-1](#)  
[1766966-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [1926015-1](#) [NLS-3-BL-C240-M40B](#) [NLS-N-W-C240-](#)  
[M40B](#) [NPS-3-BL-T6](#) [2-1589900-8](#) [9300480317](#) [294-0091-01100](#) [296-0040-01100](#) [1-6609148-0](#) [A32595-0049](#) [1766249-1](#) [19000005132](#)  
[1926016-1](#) [1-966831-8](#) [AN0024202](#) [AN0264023](#) [279-0841-10100A](#) [281-0334-00100A](#) [RMSB4](#) [419-2083-301](#) [LCDX4/0-14B-X](#) [075-8519-](#)  
[001](#) [078238-1613](#) [07.470.3256.0](#) [09000005288](#) [09140240311](#)