


## Connectors in 3.81 mm pitch Series BC/SC 3.81

### SC 3.81/..90

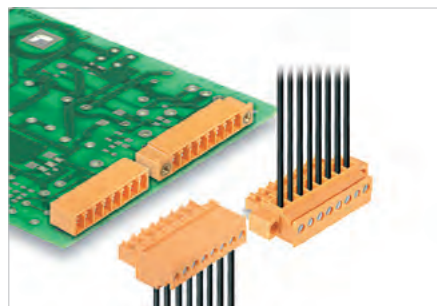

Male header with plugging direction in parallel to the circuit board.

- Available in closed (G) version and with screw flange (F)

Weidmüller's 3.81 mm pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors. They support a flood-light display and offer space for labelling and coding.

### Product data

IEC: 320 V / 17.5 A  
UL: 300 V / 10 A



For additional articles and information, refer to [catalog.weidmueller.com](http://catalog.weidmueller.com)

#### Note:


- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- P on drawing = pitch

### SC 3.81/..90G

closed side



#### Dimensioned drawing

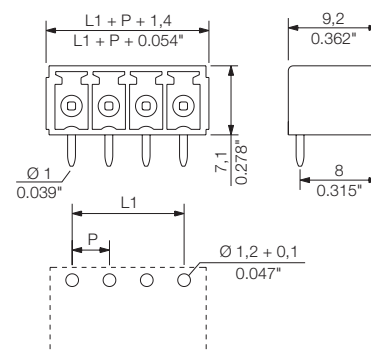

### Technical data

In compliance with IEC 60664-1 / IEC 61984			
Clamping range, max.	mm <sup>2</sup>		
<b>Solid core H05(07) V-U</b>	mm <sup>2</sup>		
Stranded H07 V-R			
Flexible H05(07) V-K	mm <sup>2</sup>		
Flexible with ferrule	mm <sup>2</sup>		
Ferrule with plastic collar	mm <sup>2</sup>		
Stripping length	mm		
Screwdriver blade	mm		
According to norm			
Tightening torque range	Nm		
<b>Rated current, max.</b>	<b>A</b>	<b>17.5</b>	<b>17.5</b>
At ambient temperature		20°C	40°C
For conductor cross-section	mm <sup>2</sup>		
Overvoltage category		III	III II
Pollution severity		3	2 2
<b>Rated voltage</b>	<b>V</b>	<b>160</b>	<b>160 320</b>
Rated impulse voltage	kV	2.5	2.5 2.5
<b>UL / CUL (Use Group)</b>		<b>B</b>	<b>C D</b>
<b>Rated voltage</b>	<b>V</b>	<b>300</b>	<b>300</b>
<b>Rated current</b>	<b>A</b>	<b>10</b>	<b>10</b>
<b>AWG conductor</b>	<b>AWG</b>		-
<b>CSA (Use Group)</b>		<b>B</b>	<b>C D</b>
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor	AWG		-
<b>General data</b>			
Type of insulation material		PA GF	
UL 94 flammability rating		V-0	
Contact base material		Cu-Leg	
Material of contact surface		tinned	
Pin dimensions = d	mm	1.0, Octagonal	
Solder eyelet Ø = D	mm	1.2	
Solder eyelet Ø tolerance	mm	+ 0,1	

### Accessories

Note: Refer to the Accessories chapter for additional accessories.

Coding		Order No.
	SC-SMT 3.81 KO GY BX	1968900000
	SC 3.81 FLA 1.5/14.25	1979730000
	SC 3.81 FLA 1.5/16	1979720000
	SC 3.81 FLA 2.3/14.25	1979750000
	SC 3.81 FLA 2.3/16	1979740000

### Ordering data

Solder pin length		3.2 mm	3.2 mm		
Colour		Orange	Black		
Pitch 3.81 mm					
Pol.	L1	(inch)	Qty.	Order No.	Order No.
2	3.81	0.150	50	1942020000	1793130000
3	7.62	0.300	50	1942040000	1793140000
4	11.43	0.450	50	1942070000	1793150000
5	15.24	0.600	50	1942090000	1793160000
6	19.05	0.750	50	1942100000	1793170000
7	22.86	0.900	50	1942120000	1942350000
8	26.67	1.050	50	1942130000	1793180000
9	30.48	1.200	50	1942140000	1942360000
10	34.29	1.350	50	1942150000	1793190000
11	38.10	1.500	50	1942160000	1942370000
12	41.91	1.650	50	1942170000	1793200000
13	45.72	1.800	50	1942180000	1942380000
14	49.53	1.950	50	1942190000	1942390000
15	53.34	2.100	50	1942200000	1942400000
16	57.15	2.250	50	1942210000	1793210000
17	60.96	2.400	50	1942220000	1942410000
18	64.77	2.550	50	1942230000	1942420000
19	68.58	2.700	50	1942240000	1942430000
20	72.39	2.850	50	1942250000	1942440000

3.81


90°

**SC 3.81/.. /90F**

with screw flange



Dimensioned drawing

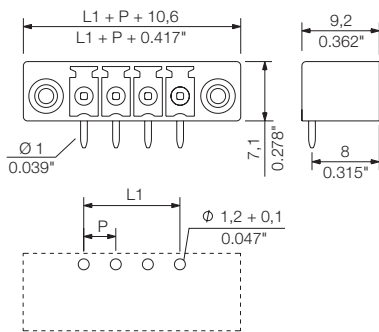


**Ordering data**

Solder pin length		3.2 mm	3.2 mm
Colour		Orange	Black
Pitch		3.81 mm	
Pol.	L1	(inch)	Qty.
2	3.81	0.150	50
3	7.62	0.300	50
4	11.43	0.450	50
5	15.24	0.600	50
6	19.05	0.750	50
7	22.86	0.900	50
8	26.67	1.050	50
9	30.48	1.200	50
10	34.29	1.350	50
11	38.10	1.500	50
12	41.91	1.650	50
13	45.72	1.800	50
14	49.53	1.950	50
15	53.34	2.100	50
16	57.15	2.250	50
17	60.96	2.400	50
18	64.77	2.550	50
19	68.58	2.700	50
20	72.39	2.850	50

## Connectors in 3.81 mm pitch Series BC/SC 3.81

### SC 3.81../180

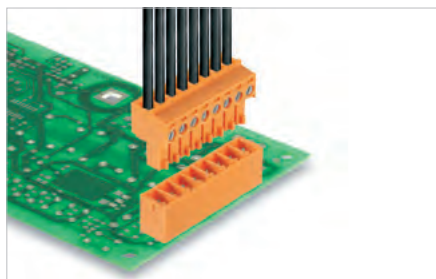

The 180° male header has a perpendicular plugging direction in relation to the circuit board. It is available in closed (G) and screw flange (F) versions.

Weidmüller's 3.81 mm pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

### Product data

IEC: 320 V / 17.5 A  
UL: 300 V / 10 A



For additional articles and information, refer to [catalog.weidmueller.com](http://catalog.weidmueller.com)

#### Note:


- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- P on drawing = pitch

### SC 3.81../180G

closed side



#### Dimensioned drawing

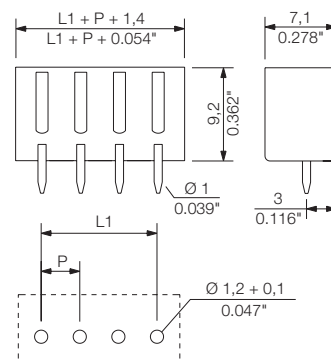

### Technical data

In compliance with IEC 60664-1 / IEC 61984			
Clamping range, max.	mm <sup>2</sup>		
<b>Solid core H05(07) V-U</b>	mm <sup>2</sup>		
Stranded H07 V-R			
Flexible H05(07) V-K	mm <sup>2</sup>		
Flexible with ferrule	mm <sup>2</sup>		
Ferrule with plastic collar	mm <sup>2</sup>		
Stripping length	mm		
Screwdriver blade	mm		
According to norm			
Tightening torque range	Nm		
<b>Rated current, max.</b>	<b>A</b>	<b>17.5</b>	<b>17.5</b>
At ambient temperature		20°C	40°C
For conductor cross-section	mm <sup>2</sup>		
Overvoltage category		III	III II
Pollution severity		3	2 2
<b>Rated voltage</b>	<b>V</b>	<b>160</b>	<b>160 320</b>
Rated impulse voltage	kV	2.5	2.5 2.5
<b>UL / CUL (Use Group)</b>		<b>B</b>	<b>C D</b>
<b>Rated voltage</b>	<b>V</b>	<b>300</b>	<b>300</b>
<b>Rated current</b>	<b>A</b>	<b>10</b>	<b>10</b>
<b>AWG conductor</b>	<b>AWG</b>		-
<b>CSA (Use Group)</b>		<b>B</b>	<b>C D</b>
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor	AWG		-
<b>General data</b>			
Type of insulation material		PA GF	
UL 94 flammability rating		V-0	
Contact base material		Cu-Leg	
Material of contact surface		tinned	
Pin dimensions = d	mm	1.0, Octagonal	
Solder eyelet Ø = D	mm	1.2	
Solder eyelet Ø tolerance	mm	+ 0,1	

### Accessories

Note: Refer to the Accessories chapter for additional accessories.

Coding	Order No.
SC-SMT 3.81 KO GY BX	1968900000
PTSC KA 2.2X4.5 WN1412	1610740000

### Ordering data

Solder pin length		3.2 mm	3.2 mm		
Colour		Orange	Black		
Pitch 3.81 mm					
Pol.	L1 (inch)	Qty.	Order No.	Order No.	
2	3.81	0.150	50	1942840000	1793520000
3	7.62	0.300	50	1942850000	1793530000
4	11.43	0.450	50	1942860000	1793540000
5	15.24	0.600	50	1942870000	1793550000
6	19.05	0.750	50	1942880000	1793560000
7	22.86	0.900	50	1942890000	1871490000
8	26.67	1.050	50	1942900000	1793570000
9	30.48	1.200	50	1942910000	1871470000
10	34.29	1.350	50	1942920000	1793580000
11	38.10	1.500	50	1942930000	1943100000
12	41.91	1.650	50	1942940000	1793590000
13	45.72	1.800	50	1942950000	1943110000
14	49.53	1.950	50	1942960000	1943120000
15	53.34	2.100	50	1942970000	1943130000
16	57.15	2.250	50	1942980000	1793600000
17	60.96	2.400	50	1942990000	1943140000
18	64.77	2.550	50	1943000000	1943150000
19	68.58	2.700	50	1943010000	1943160000
20	72.39	2.850	50	1943020000	1943170000

3.81


180°

**SC 3.81/././180F**

with screw flange



**Dimensioned drawing**

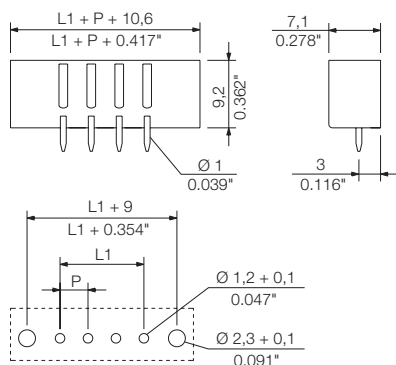

**Ordering data**

Solder pin length		3.2 mm	3.2 mm		
Colour		Orange	Black		
Pitch		3.81 mm			
Pol.	L1	(inch)	Qty.	Order No.	Order No.
2	3.81	0.150	50	1943180000	1793700000
3	7.62	0.300	50	1943190000	1793710000
4	11.43	0.450	50	1943200000	1793720000
5	15.24	0.600	50	1943210000	1793730000
6	19.05	0.750	50	1943220000	1793740000
7	22.86	0.900	50	1943230000	1837010000
8	26.67	1.050	50	1943240000	1793750000
9	30.48	1.200	50	1943250000	1943470000
10	34.29	1.350	50	1943260000	1793760000
11	38.10	1.500	50	1943270000	1943480000
12	41.91	1.650	50	1943280000	1793770000
13	45.72	1.800	50	1943290000	1943490000
14	49.53	1.950	50	1943300000	1943500000
15	53.34	2.100	50	1943310000	1943510000
16	57.15	2.250	50	1943320000	1793780000
17	60.96	2.400	50	1943330000	1943520000
18	64.77	2.550	50	1943340000	1943530000
19	68.58	2.700	50	1943350000	1943540000
20	72.39	2.850	50	1943360000	1943550000

## Connectors in 3.81 mm pitch Series BC/SC 3.81

### SCZ 3.81../180



Inverted male plug with screw connection:

- Wire-to-wire connection with the BCZ female plug
- Board-to-wire connection with the BCL-SMT female header.
- Available in closed (G) version, screw flange (F), inverted flange (FI) and with lock and release lever (LR).

Weidmüller's 3.81 mm pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

### Product data

IEC: 320 V / 17.5 A / 0.2 - 1.5 mm<sup>2</sup>  
UL: 300 V / 10 A / AWG 28 - 16




For additional articles and information, refer to [catalog.weidmuller.com](http://catalog.weidmuller.com)


#### Note:

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section & min. No. of poles.
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drawing = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

### SCZ 3.81../180G



#### Dimensioned drawing

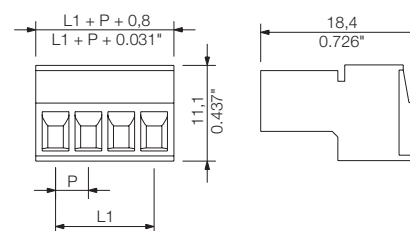

### Technical data

In compliance with IEC 60664-1 / IEC 61984			
Clamping range, max.	mm <sup>2</sup>	0.08...1.5	
<b>Solid core H05(07) V-U</b>	<b>mm<sup>2</sup></b>	<b>0.2...1.5</b>	
Stranded H07 V-R			
Flexible H05(07) V-K	mm <sup>2</sup>	0.2...1.5	
Flexible with ferrule	mm <sup>2</sup>	0.2...1.5	
Ferrule with plastic collar	mm <sup>2</sup>	0.2...1.5	
Stripping length	mm	7	
Screwdriver blade	mm	0.4 x 2.5	
According to norm		DIN 5264	
Tightening torque range	Nm	0.2...0.25	
<b>Rated current, max.</b>	<b>A</b>	<b>17.5</b>	<b>17.5</b>
At ambient temperature		20°C	40°C
For conductor cross-section	mm <sup>2</sup>	1	
Overtoltage category		III	III II
Pollution severity		3	2 2
<b>Rated voltage</b>	<b>V</b>	<b>160</b>	<b>160 320</b>
Rated impulse voltage	kV	2.5	2.5 2.5
<b>UL / CUL (Use Group)</b>		<b>B</b>	<b>C D</b>
<b>Rated voltage</b>	<b>V</b>	<b>300</b>	<b>300</b>
<b>Rated current</b>	<b>A</b>	<b>10</b>	<b>10</b>
<b>AWG conductor</b>	<b>AWG</b>	<b>28-16</b>	
<b>CSA (Use Group)</b>		<b>B</b>	<b>C D</b>
Rated voltage	V	300	300
Rated current	A	10	10
AWG conductor	AWG	28-16	
General data			
Type of insulation material		PA GF	
UL 94 flammability rating		V-0	
Contact base material		Cu-Leg	
Material of contact surface		tinned	
Pin dimensions = d	mm		
Solder eyelet Ø = D	mm		
Solder eyelet Ø tolerance	mm		

### Accessories


Note: Refer to the Accessories chapter for additional accessories.

Coding	Order No.
SC-SMT 3.81 KO GY BX	1968900000
<b>Screwdriver</b>	
SDIS 0.4X2.5X75	9008370000
SDS 0.4X2.5X75	9009030000

### Ordering data

Solder pin length					
Colour	Orange	Black			
Pitch	3.81 mm				
Pol.	L1	(inch)	Qty.	Order No.	Order No.
2	3.81	0.150	50	1969520000	1970010000
3	7.62	0.300	50	1969540000	1970020000
4	11.43	0.450	50	1969560000	1970030000
5	15.24	0.600	50	1969570000	1970050000
6	19.05	0.750	50	1969580000	1970060000
7	22.86	0.900	50	1969590000	1970070000
8	26.67	1.050	50	1969610000	1970080000
9	30.48	1.200	50	1969630000	1970090000
10	34.29	1.350	50	1969640000	1970100000
11	38.10	1.500	50	1969660000	1970110000
12	41.91	1.650	50	1969670000	1970120000

### Representative deratings curve

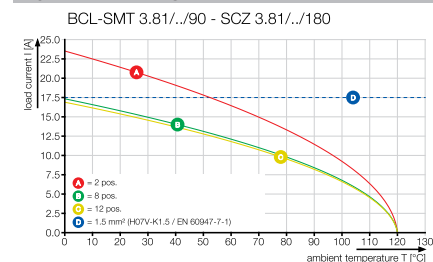

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [weidmuller](#) manufacturer:*

Other Similar products are found below :

[8924550000](#) [56956](#) [0133660000](#) [6720000227](#) [6720005111](#) [68676](#) [69718](#) [EXO24CH](#) [7760056348](#) [7940000218](#) [8005181001](#) [8008180000](#)  
[8432240000](#) [8463580000](#) [8545830000](#) [8689870000](#) [8705640000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#)  
[9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#) [9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [9159530000](#) [919656](#) [919764](#)  
[9202230000](#) [9202850000](#) [9456750000](#) [9457913000](#) [980811](#) [980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#) [9919371205](#)  
[9919371224](#) [9925710000](#) [9927480024](#) [1166660000](#) [11751](#)