

**A-series
ALO 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image**Power distribution**

You safely and efficiently distribute electricity to the power consumers with our W-Series feed-through terminal blocks and our optimised WPD phase distribution blocks.

General ordering data

| | |
|------------|---|
| Type | ALO 6 |
| Order No. | 1991780000 |
| Version | Supply terminal, PUSH IN, 6 mm ² , 800 V, 41 A, dark beige |
| GTIN (EAN) | 4050118376470 |
| Qty. | 20 pc(s). |

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|--------------------------|---------|-----------------|------------|
| Width | 9 mm | Width (inches) | 0.354 inch |
| Height | 77 mm | Height (inches) | 3.031 inch |
| Depth | 45.5 mm | Depth (inches) | 1.791 inch |
| Depth including DIN rail | 46 mm | Net weight | 20.054 g |

Temperatures

| | | | |
|----------------------------------|---------------|----------------------------------|--------|
| Storage temperature, max. | 40 °C | Storage temperature, min. | 10 °C |
| Storage temperature | 10 °C...40 °C | Continuous operating temp., min. | -60 °C |
| Continuous operating temp., max. | 130 °C | | |

Material data

| | | | |
|--------------------------------|--------|---------------------------|------------|
| Material | Wemid | Colour | dark beige |
| Colour of operational elements | orange | UL 94 flammability rating | V-0 |

System specifications

| | | | |
|-------------------------------|----|-------------------------------------|-------|
| End cover plate required | No | Number of potentials | 1 |
| Number of levels | 1 | Number of clamping points per level | 2 |
| Number of potentials per tier | 1 | Levels cross-connected internally | No |
| PE connection | No | Rail | TS 35 |
| N-function | No | PE function | No |
| PEN function | No | | |

Additional technical data

| | | | |
|---------------------|-------|-------------------|---------|
| Installation advice | Rail | Open sides | closed |
| Snap-on | No | Type of fixing | Snap-on |
| Type of mounting | TS 35 | With snap-in pegs | No |

CSA rating data

| | | | |
|-------------------------------|-----------------|-------------------------------|-------|
| Certificate No. (CSA) | 200039-70089609 | Current size B (CSA) | 38 A |
| Current size C (CSA) | 38 A | Current size D (CSA) | 5 A |
| Voltage size B (CSA) | 600 V | Voltage size C (CSA) | 600 V |
| Voltage size D (CSA) | 600 V | Wire cross section max. (CSA) | 8 AWG |
| Wire cross section min. (CSA) | 22 AWG | | |

**A-series
ALO 6**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 1.0 x 5.5 mm | Clamping range, max. | 6 mm ² |
| Clamping range, min. | 0.34 mm ² | Connection cross-section, stranded, max. | 6 mm ² |
| Connection cross-section, stranded, min. | 0.5 mm ² | Connection direction | top |
| Gauge to IEC 60947-1 | A5 | Number of connections | 2 |
| Stripping length | 12 mm | Twin wire-end ferrules, max. | 1.5 mm ² |
| Twin wire-end ferrules, min. | 0.5 mm ² | Type of connection | PUSH IN |
| Wire connection cross section AWG, max. | AWG 8 | Wire connection cross section AWG, min. | AWG 22 |
| Wire connection cross section, finely stranded, max. | 6 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 6 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 6 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm ² | Wire connection cross-section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 6 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

Rating data

| | | | |
|---|-------------------|--|---------|
| Rated cross-section | 6 mm ² | Rated voltage | 800 V |
| Rated current | 41 A | Current at maximum wires | 41 A |
| Standards | IEC 60947-7-1 | Volume resistance according to IEC 60947-7-x | 0.78 mΩ |
| Power loss in accordance with IEC 60947-7-x | 1.31 W | Rated impulse withstand voltage | 8 kV |
| Pollution severity | 3 | Surge voltage category | III |

UL rating data

| | | | |
|--|--------|--|-------|
| Certificate No. (cURus) | E60693 | Conductor size Factory wiring max. (cURus) | 8 AWG |
| Conductor size Factory wiring min. (cURus) | 22 AWG | Conductor size Field wiring max. (cURus) | 8 AWG |
| Conductor size Field wiring min. (cURus) | 22 AWG | Current size B (cURus) | 38 A |
| Current size C (cURus) | 38 A | Current size D (cURus) | 5 A |
| Voltage size B (cURus) | 600 V | Voltage size C (cURus) | 600 V |
| Voltage size D (cURus) | 600 V | | |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC000897 | ETIM 7.0 | EC000897 |
| eClass 9.0 | 27-14-11-20 | eClass 9.1 | 27-14-11-20 |
| eClass 10.0 | 27-14-11-20 | | |

Approvals

| | | | |
|-----------|--|--|--|
| Approvals |  | | |
| ROHS | Conform | | |

**A-series
ALO 6**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Downloads**

| | |
|---|---|
| Approval/Certificate/Document of Conformity | ATEX Certificate IECEX Certificate CB Test Certificate CB Certificate |
| Brochure/Catalogue | CAT 1 TERM 16/17 EN |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| Engineering Data | STEP |
| Tender specification | Klippon® Connect 1991780000 EN Klippon® Connect 1991780000 DE |
| User Documentation | NTI_ALO 6 Additional Note DE Additional Note EN StorageConditionsTerminalBlocks Aderendhülsen für die Klippon® Connect A-Reihe Wire end ferrules for Klippon® Connect A-series |

Safety note



| | |
|---------------|------------------------------------|
| Safety notice | Safety Information |
|---------------|------------------------------------|

Data sheet

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

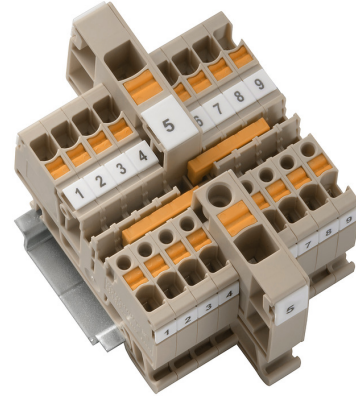


**A-series
ALO 6**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.


- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| Type | WS 10/8 PLUS MC NE WS | Version |
|------------|----------------------------|--|
| Order No. | 1905950000 | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528103 | white |
| Qty. | 420 pc(s). | |

Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| Type | WS 10/8 PLUS MC SDR | Version |
|------------|----------------------------|--|
| Order No. | 1906030000 | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528196 | To customer specification |
| Qty. | 84 pc(s). | |

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories**ZQV 2.5N****Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

| | |
|------------|----------------------------|
| Type | ZQV 2.5N/2 BL |
| Order No. | 1527740000 |
| GTIN (EAN) | 4050118448658 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/50 |
| Order No. | 1527730000 |
| GTIN (EAN) | 4050118411362 |
| Qty. | 5 pc(s). |
| Type | ZQV 2.5N/2 |
| Order No. | 1527540000 |
| GTIN (EAN) | 4050118448467 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/3 |
| Order No. | 1527570000 |
| GTIN (EAN) | 4050118448450 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/7 BL |
| Order No. | 1527830000 |
| GTIN (EAN) | 4050118448603 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/20 BL |
| Order No. | 1527890000 |
| GTIN (EAN) | 4050118448566 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/5 BL |
| Order No. | 1527790000 |
| GTIN (EAN) | 4050118448627 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/5 RD |
| Order No. | 2108710000 |
| GTIN (EAN) | 4050118448511 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/8 BL |
| Order No. | 1527840000 |
| GTIN (EAN) | 4050118448597 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/2 RD |
| Order No. | 2108470000 |
| GTIN (EAN) | 4050118448542 |
| Qty. | 60 pc(s). |

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

| | |
|------------|----------------------------|
| Type | ZQV 2.5N/7 |
| Order No. | 1527640000 |
| GTIN (EAN) | 4050118448412 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/9 |
| Order No. | 1527680000 |
| GTIN (EAN) | 4050118447996 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/10 |
| Order No. | 1527690000 |
| GTIN (EAN) | 4050118447989 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/50 BL |
| Order No. | 1527920000 |
| GTIN (EAN) | 4050118448559 |
| Qty. | 5 pc(s). |
| Type | ZQV 2.5N/4 RD |
| Order No. | 2108700000 |
| GTIN (EAN) | 4050118448528 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/6 |
| Order No. | 1527630000 |
| GTIN (EAN) | 4050118448429 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/9 RD |
| Order No. | 2108900000 |
| GTIN (EAN) | 4050118448474 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/50 RD |
| Order No. | 2109000000 |
| GTIN (EAN) | 4050118486001 |
| Qty. | 5 pc(s). |
| Type | ZQV 2.5N/20 |
| Order No. | 1527720000 |
| GTIN (EAN) | 4050118447972 |
| Qty. | 20 pc(s). |
| Type | ZQV 2.5N/4 BL |
| Order No. | 1527780000 |
| GTIN (EAN) | 4050118448634 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/3 BL |
| Order No. | 1527770000 |
| GTIN (EAN) | 4050118448641 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/4 |
| Order No. | 1527590000 |
| GTIN (EAN) | 4050118448443 |
| Qty. | 60 pc(s). |
| Type | ZQV 2.5N/10 RD |
| Order No. | 2108910000 |
| GTIN (EAN) | 4050118486018 |
| Qty. | 20 pc(s). |

Creation date January 7, 2020 3:36:35 PM CET

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Type ZQV 2.5N/20 RD
 Order No. [2108920000](#)
 GTIN (EAN) 4050118485899
 Qty. 20 pc(s).

Type ZQV 2.5N/10 BL
 Order No. [1527880000](#)
 GTIN (EAN) 4050118448573
 Qty. 20 pc(s).

Type ZQV 2.5N/7 RD
 Order No. [2108810000](#)
 GTIN (EAN) 4050118448498
 Qty. 20 pc(s).

Type ZQV 2.5N/6 BL
 Order No. [1527820000](#)
 GTIN (EAN) 4050118448610
 Qty. 20 pc(s).

Type ZQV 2.5N/5
 Order No. [1527620000](#)
 GTIN (EAN) 4050118448436
 Qty. 20 pc(s).

Type ZQV 2.5N/9 BL
 Order No. [1527870000](#)
 GTIN (EAN) 4050118448580
 Qty. 20 pc(s).

Type ZQV 2.5N/3 RD
 Order No. [2108690000](#)
 GTIN (EAN) 4050118448535
 Qty. 60 pc(s).

Type ZQV 2.5N/6 RD
 Order No. [2108720000](#)
 GTIN (EAN) 4050118448504
 Qty. 20 pc(s).

Type ZQV 2.5N/8
 Order No. [1527670000](#)
 GTIN (EAN) 4050118448405
 Qty. 20 pc(s).

Type ZQV 2.5N/8 RD
 Order No. [2108870000](#)
 GTIN (EAN) 4050118448481
 Qty. 20 pc(s).

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories**ZQV 1.5N****Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

| | |
|------------|----------------------------|
| Type | ZQV 1.5N/4 RD |
| Order No. | 1985690000 |
| GTIN (EAN) | 4050118370515 |
| Qty. | 60 pc(s). |
| Type | ZQV 1.5N/7 RD |
| Order No. | 1985750000 |
| GTIN (EAN) | 4050118370249 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/6 RD |
| Order No. | 1985730000 |
| GTIN (EAN) | 4050118370454 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/10 |
| Order No. | 1985580000 |
| GTIN (EAN) | 4050118370416 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/8 RD |
| Order No. | 1985770000 |
| GTIN (EAN) | 4050118370508 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/5 |
| Order No. | 1985500000 |
| GTIN (EAN) | 4050118369991 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/50 RD |
| Order No. | 1985820000 |
| GTIN (EAN) | 4050118370270 |
| Qty. | 5 pc(s). |
| Type | ZQV 1.5N/3 BL |
| Order No. | 1985550000 |
| GTIN (EAN) | 4050118370485 |
| Qty. | 60 pc(s). |
| Type | ZQV 1.5N/3 |
| Order No. | 1985480000 |
| GTIN (EAN) | 4050118370096 |
| Qty. | 60 pc(s). |
| Type | ZQV 1.5N/5 RD |
| Order No. | 1985710000 |
| GTIN (EAN) | 4050118370256 |
| Qty. | 20 pc(s). |

Creation date January 7, 2020 3:36:35 PM CET

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

| | |
|------------|----------------------------|
| Type | ZQV 1.5N/50 |
| Order No. | 1985620000 |
| GTIN (EAN) | 4050118370300 |
| Qty. | 5 pc(s). |
| Type | ZQV 1.5N/9 |
| Order No. | 1985560000 |
| GTIN (EAN) | 4050118370409 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/10 BL |
| Order No. | 1985680000 |
| GTIN (EAN) | 4050118370539 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/20 BL |
| Order No. | 1985700000 |
| GTIN (EAN) | 4050118370331 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/8 BL |
| Order No. | 1985640000 |
| GTIN (EAN) | 4050118370461 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/9 RD |
| Order No. | 1985790000 |
| GTIN (EAN) | 4050118370386 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/7 |
| Order No. | 1985520000 |
| GTIN (EAN) | 4050118370195 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/7 BL |
| Order No. | 1985630000 |
| GTIN (EAN) | 4050118370522 |
| Qty. | 20 pc(s). |
| Type | ZQV 1.5N/2 BL |
| Order No. | 1985530000 |
| GTIN (EAN) | 4050118370423 |
| Qty. | 60 pc(s). |
| Type | ZQV 1.5N/2 RD |
| Order No. | 1985650000 |
| GTIN (EAN) | 4050118370324 |
| Qty. | 60 pc(s). |
| Type | ZQV 1.5N/3 RD |
| Order No. | 1985670000 |
| GTIN (EAN) | 4050118370348 |
| Qty. | 60 pc(s). |
| Type | ZQV 1.5N/50 BL |
| Order No. | 1985720000 |
| GTIN (EAN) | 4050118370546 |
| Qty. | 5 pc(s). |
| Type | ZQV 1.5N/20 |
| Order No. | 1985600000 |
| GTIN (EAN) | 4050118370225 |
| Qty. | 20 pc(s). |

Creation date January 7, 2020 3:36:35 PM CET

A-series ALO 6

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Type ZQV 1.5N/6
Order No. [1985510000](#)
GTIN (EAN) 4050118370188
Qty. 20 pc(s).

Type ZQV 1.5N/8
Order No. [1985540000](#)
GTIN (EAN) 4050118370218
Qty. 20 pc(s).

Type ZQV 1.5N/20 RD
Order No. [1985810000](#)
GTIN (EAN) 4050118370355
Qty. 20 pc(s).

Type ZQV 1.5N/5 BL
Order No. [1985590000](#)
GTIN (EAN) 4050118370430
Qty. 20 pc(s).

Type ZQV 1.5N/9 BL
Order No. [1985660000](#)
GTIN (EAN) 4050118370478
Qty. 20 pc(s).

Type ZQV 1.5N/2
Order No. [1985410000](#)
GTIN (EAN) 4050118369861
Qty. 60 pc(s).

Type ZQV 1.5N/6 BL
Order No. [1985610000](#)
GTIN (EAN) 4050118370492
Qty. 20 pc(s).

Type ZQV 1.5N/4
Order No. [1985490000](#)
GTIN (EAN) 4050118370201
Qty. 60 pc(s).

Type ZQV 1.5N/4 BL
Order No. [1985570000](#)
GTIN (EAN) 4050118370317
Qty. 60 pc(s).

Type ZQV 1.5N/10 RD
Order No. [1985800000](#)
GTIN (EAN) 4050118370393
Qty. 20 pc(s).

A-series
ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories
Custom printing


The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 PLUS MC SDR | Version |
| Order No. | 1046370000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782079 | Weidmueller, To customer specification |
| Qty. | 160 pc(s). | |
| Type | DEK 5/8 MC SDR | Version |
| Order No. | 1856750000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400867 | Weidmueller, To customer specification |
| Qty. | 160 pc(s). | |

End brackets

Spring connection with PUSH IN Technology

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SCL/1 V0 BK | Version |
| Order No. | 2661300000 | A-series, End bracket |
| GTIN (EAN) | 4050118702187 | |
| Qty. | 20 pc(s). | |
| Type | AEB 35 SCL/1 V0 GY | Version |
| Order No. | 2661290000 | A-series, End bracket |
| GTIN (EAN) | 4050118702170 | |
| Qty. | 20 pc(s). | |

A-series ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SC/1 | Version |
| Order No. | 1991920000 | A-series, End bracket |
| GTIN (EAN) | 4050118376722 | |
| Qty. | 50 pc(s). | |
| Type | AEB 35 SC/1 BK | Version |
| Order No. | 2475310000 | A-series, End bracket |
| GTIN (EAN) | 4050118487114 | |
| Qty. | 50 pc(s). | |
| Type | AEB 35 SCL/1 V0 | Version |
| Order No. | 2661280000 | A-series, End bracket |
| GTIN (EAN) | 4050118702163 | |
| Qty. | 20 pc(s). | |

Digital multimeters



Multimeters are capable of measuring a number of variables. Each instrument can measure voltage and resistance, as well as performing continuity and diode testing as standard. In addition, the individual multimeters also feature extra measuring options such as current, frequency, capacitance and temperature. Digital multimeters have the advantage of a clear display which can be read easily and directly. With these instruments, mistakes arising from faulty conversion of the measuring ranges or misreading the display are a thing of the past.

General ordering data

| | | |
|------------|----------------------------|------------|
| Type | ZUB MULTIMETER | Version |
| Order No. | 9205270000 | Multimeter |
| GTIN (EAN) | 4032248723522 | |
| Qty. | 1 pc(s). | |

Test adapter



Spring connection with PUSH IN Technology

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

| | |
|------------|----------------------------|
| Type | ATPG 1.5-10 L |
| Order No. | 1991890000 |
| GTIN (EAN) | 4050118376647 |
| Qty. | 50 pc(s). |

A-series ALO 6

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | | |
|------------|----------------------------|---------|---|
| Type | DEK 5/8 MC NE WS | Version | |
| Order No. | 1856740000 | | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400850 | | Weidmueller, white |
| Qty. | 800 pc(s). | | |

Covers



Spring connection with PUSH IN Technology

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

| | | | |
|------------|----------------------------|---------|--------------------------------------|
| Type | AAM 6 YE FLASH | Version | |
| Order No. | 2635570000 | | Terminal marker, 13 x 8.1 mm, yellow |
| GTIN (EAN) | 4050118674514 | | |
| Qty. | 40 pc(s). | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Terminal Blocks](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[1045932](#) [00110420202](#) [00110430402](#) [5724.2/L](#) [592808-3](#) [CTS25U/BL](#) [CTS2.5U-N/Y](#) [90.080](#) [91.010](#) [91.040](#) [DP25-GY-ND](#) [15288](#) [90.070](#)
[90.202](#) [90.905](#) [91.001](#) [91.020](#) [91.201](#) [91.340](#) [2713793](#) [280-331](#) [283-317](#) [283-607](#) [2909044](#) [2909798](#) [29-2052](#) [SRT2-OD08CL-1](#)
[CDL4U\(E\)MOV](#) [2757801](#) [2794660](#) [284-317](#) [2890975](#) [2907033](#) [3048496](#) [CTS2.5U-N/O](#) [5542152](#) [5602077](#) [0709880](#) [5520682](#) [5607102](#)
[EPUSC](#) [SRT2-OD16P](#) [2901288](#) [591620-2](#) [1-591651-1](#) [NRA37-1/2](#) [592814-1](#) [592814-3](#) [SRT2-ID16P](#) [NRA37-12](#)