

ENERGY METER D650

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Energy meters - ValueLine

Advanced functionality of energy data capture

The scope of performance of the ValueLine energy meters goes beyond the core functions of energy measurement.

They are also suitable for determining, storing and visualising further energy quality parameters.

The free "ecoExplorer go" software is available for most types of the product group, on the one hand for device configuration / commissioning / visualisation of the measured values and on the other hand for analysing the power quality.

General ordering data

Version	Supply voltage : 230 V
Order No.	2425490000
Type	ENERGY METER D650
GTIN (EAN)	4050118433326
Qty.	1 pc(s).

Creation date September 17, 2022 10:09:43 PM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

ENERGY METER D650

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	82 mm	Depth (inches)	3.228 inch
Height	90 mm	Height (inches)	3.543 inch
Width	107.5 mm	Width (inches)	4.232 inch
Net weight	350 g		

Temperatures

Storage temperature	-20 °C...70 °C	Operating temperature	-10 °C...55 °C
Humidity at operating temperature	5...95 % RH		

Measuring current input

Current-measuring channels	4	Distortion factor THD-I in %	Yes
Harmonics, per order / current	1..40.	Measuring accuracy for current	0.25 %
Rated current	1 / 5 A	Residual current measuring	No

Measuring voltage input

Distortion factor THD-U in %	Yes	Four-wire system	Yes
Harmonics, per order / voltage	1..40.	Measurement range, voltage L-L, AC	480 V
Measurement range, voltage L-N, AC	277 V	Measuring accuracy for voltage	0.2 %
Quadrants	4	Three-wire system	Yes

Communication

Interface	RS232: 9.6 – 115.2 kbps, RS485: 9.6 – 921.6 kbps	Protocol	Modbus RTU
-----------	---	----------	------------

Inputs/outputs

Number of digital inputs	2	Number of digital outputs	2
Number of pulse outputs	2	Temperature input	Yes

Measurement data recording

Memory; minimum and maximum values	Yes	Memory size	4 MB
Number of memory values	156 k	Update interval register	200 ms
Min. memory recording interval	60 s	Software	ecoExplorer go®
Integrated logic	Yes		

ENERGY METER D650

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Technical data

Input frequency	< 20 Hz	Protection degree	IP20
Rated current	1 / 5 A	Standards	DIN EN 61326-1, DIN EN 61000-4-2, DIN EN 61000-4-3, DIN EN 61000-4-4, DIN EN 61000-4-5, DIN EN 61000-4-6, DIN EN 61000-4-8, EN 61000-4-11, IEC 61010-1, IEC 61010-2-030, EN 55011
Measurement range, voltage L-N, AC	277 V	Measurement range, voltage L-L, AC	480 V
Surge voltage category	300 V CAT III	Voltage supply	95 - 240 V AC, 135 - 340 V DC
Supply voltage	230 V	Three-wire system	Yes
Four-wire system	Yes	Quadrants	4
Sampling frequency 50/60 Hz	20 kHz	Continuous measurements	Yes
Measurement result per second	5	Effective value from the period (50/60 Hz)	10 / 12
Residual current measuring	No	Current-measuring channels	4
Measuring accuracy for voltage	0.2 %	Measuring accuracy for current	0.25 %
Measurement accuracy for active energy (kWh, .../5 A)	Class 0.5S	Operating-hours counter	Yes
Clock	Yes	Bimetal function	Yes

Voltage quality measurement

Harmonics, per order / voltage	1.-40.	Harmonics, per order / current	1.-40.
Distortion factor THD-U in %	Yes	Distortion factor THD-I in %	Yes
Unbalanced	Yes	Positive, negative and zero system	Yes
Brief interruptions	No	Sequence-of-events recorder function	No

Insulation coordination

Surge voltage category	300 V CAT III
------------------------	---------------

Classifications

ETIM 6.0	EC002301	ETIM 7.0	EC002301
ETIM 8.0	EC002301	ECLASS 9.0	27-14-23-30
ECLASS 9.1	27-21-03-01	ECLASS 10.0	27-14-23-30
ECLASS 11.0	27-14-23-30	ECLASS 12.0	27-14-23-30

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E469563

Creation date September 17, 2022 10:09:43 PM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

3

ENERGY METER D650

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Software	Device description – MODBUS Adressenliste Runtime Software – Win64 - ecoExplorer.go
User Documentation	Quick Guide German/English Manual Energy Meter D650 German/English Manual ECOEXPLORER GO English
Catalogues	Catalogues in PDF-format



ENERGY METER D650

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Dimensioned drawing

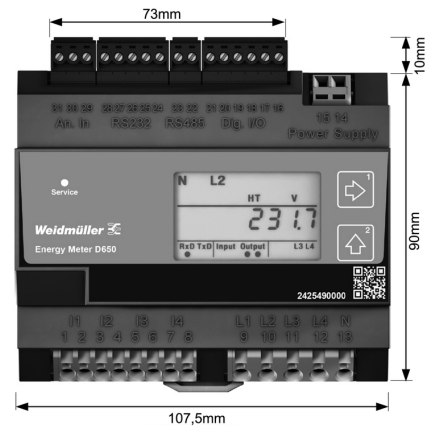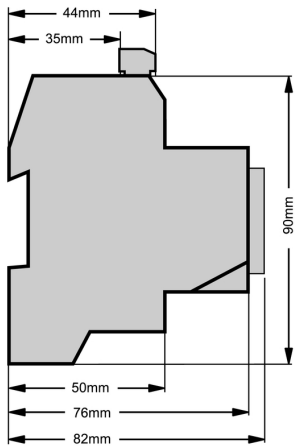

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[70.360.4828.0](#) [72331-00](#) [85310-25](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [20046-20](#) [20182-23](#) [AP1021](#)
[25.320.5053.0](#) [25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [20078-20](#) [EM11DINAV81XO1X](#) [87166-00](#) [87895-00](#) [28000-03](#)
[82322K-11](#) [86641-00](#) [87004-00](#) [HB8280R2490](#) [HB8260R4890](#) [20125-21](#) [86640-00](#) [2CMA100180R1000](#) [2CMA100183R1000](#) [F451730](#)
[F452710](#) [LE-03M-CT](#) [039-90212-0000-1/2A-0-200/400A-96X96MM](#) [04.630.1080.0](#) [MT4W-AV-4N](#) [MT4W-DA-4N](#) [MT4W-DV-4N](#) [DMG](#)
[100](#) [DMK 01 R1](#) [DMK 22](#) [DMK 70 R1](#) [DPM3AS-BL](#) [EMA1710](#) [EMT1900](#) [SP400-BLUE](#) [ACM3P-4-AC1-B-C](#) [ACA-20PC-2-DC1-RL-C](#)
[CUB4CL20](#)