

DURA ECO LA-BAT 24V 1.2AH**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

General ordering data

Version	Battery
Order No.	2789890000
Type	DURA ECO LA-BAT 24V 1.2AH
GTIN (EAN)	4064675068648
Qty.	1 pc(s).

DURA ECO LA-BAT 24V 1.2AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Depth	124 mm	Depth (inches)	4.882 inch
Height	149.5 mm	Height (inches)	5.886 inch
Width	52 mm	Width (inches)	2.047 inch
Net weight	1,750 g		

Temperatures

Storage temperature	-20 °C...60 °C	Humidity	5...95 % RH
---------------------	----------------	----------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	30bf869c-8adc-4ed2-ad02-c1fec963e943
------------	----------------	------	--------------------------------------

Operating interfaces and control inputs

Temperature probe	NTC 100 kΩ
-------------------	------------

Input

Charging current, max.	0.2 A	Nominal capacity	1.3 Ah
Rated input voltage	24 V DC		

Output

Output current, max.	15 A	Overload and short circuit protection	10 A fuse
Parallel connection option	Yes	Temperature probe	NTC 100 kΩ

General data

Ambient temperature	Charge: -15...+50°C, Discharge: -20...+60°C	Clip-in foot	metal
Humidity	5...95 % RH	Life expectancy	5.65 year
Shock wall acc. to IEC 68227	30 g	Vibration DIN rail/wall in accordance with IEC 68-2-6	0.7 / 0.7 g

Insulation coordination

Protection class	III, with no ground connection, for SELV
------------------	--

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	12	Conductor cross-section, AWG/kcmil , min.	24
Conductor cross-section, flexible , min.	0.2 mm ²	Conductor cross-section, rigid , max.	4 mm ²
Conductor cross-section, rigid , min.	0.2 mm ²	Wire connection cross section, flexible (input), max.	4 mm ²

Connection data (signal)

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	12	Wire cross-section, AWG/kcmil , min.	24
Wire cross-section, solid , max.	4 mm ²	Wire cross-section, solid , min.	0.2 mm ²

Creation date September 18, 2022 1:59:43 AM CEST

DURA ECO LA-BAT 24V 1.2AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data**Approvals**

Certificate no. (cULus)	E258476	Institute (cULus)	www.weidmueller.com
-------------------------	---------	-------------------	---------------------

Classifications

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92	ECLASS 12.0	27-04-06-92

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E258476

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN
User Documentation	Instruction sheets

DURA ECO LA-BAT 24V 1.2AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings

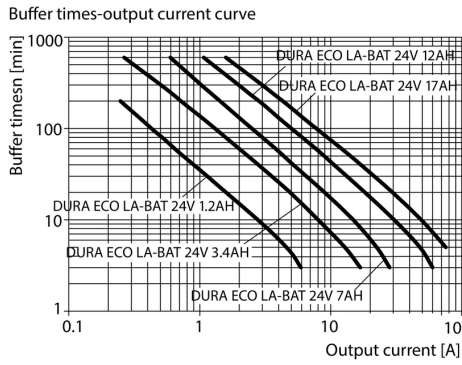

Buffer Time

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for UPS - Uninterruptible Power Supplies category:

Click to view products by Weidmuller manufacturer:

Other Similar products are found below :

[SMT3000RMI2U](#) [SMART-1400-RM](#) [UPS1500ITSIT](#) [TRIO-UPS-2G/3AC/24DC/20](#) [QUINT4-UPS/24DC/24DC/20/EI](#) [QUINT4-UPS/24DC/24DC/40/EI](#) [QUINT4-UPS/24DC/24DC/10/US](#) [QUINT4-UPS/24DC/24DC/20/US](#) [QUINT4-UPS/24DC/24DC/40/US](#)
[SDU24EXTBC6B](#) [2786240000](#) [2789890000](#) [TSPC 240-124UPS](#) [1251220000](#) [SDUCFRELAYCARD](#) [SDUCFRELAYCARD](#)
[SDUMBUSCARD](#) [SDU-PMBRK](#) [S8BA-24D24D480SBF](#) [6EP1931-2EC21](#) [6EP1931-2FC21](#) [6EP1933-2EC51](#) [SDU-24-BAT](#) [6EP1931-2DC21](#) [CBI2801224A](#) [BR1500GI](#) [SPUBC24120](#) [DRU-24V10ACZ](#) [DRU-24V40ABN](#) [DR-UPS40](#) [5P2200RT](#) [9PX2000RT](#) [9PX3000GRT-L](#)
[9PX3000RTN](#) [NETWORK-M2](#) [EA-UPS INFORMER](#) [GUARD LCD2 650 AP](#) [DUPS40](#) [SC620](#) [S8BA-24D24D120LF](#) [S8BA-24D24D240LF](#)
[UPS003LSM](#) [MINI-BAT/12DC/1.6AH](#) [1067327](#) [1081430](#) [1082548](#) [1110155](#) [1274119](#) [1274520](#) [1283116](#) [2320212](#)