

DURA ECO LA-BAT 24V 3.4AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

General ordering data

Version	Battery
Order No.	2789900000
Type	DURA ECO LA-BAT 24V 3.4AH
GTIN (EAN)	4064675068655
Qty.	1 pc(s).

DURA ECO LA-BAT 24V 3.4AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	166 mm	Depth (inches)	6.535 inch
Height	141 mm	Height (inches)	5.551 inch
Width	108 mm	Width (inches)	4.252 inch
Net weight	3,900 g		

Temperatures

Storage temperature	-20 °C...60 °C	Humidity	5...95 % RH
---------------------	----------------	----------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Operating interfaces and control inputs

Temperature probe	NTC 100 kΩ
-------------------	------------

Input

Charging current, max.	0.51 A	Nominal capacity	3.4 Ah
Rated input voltage	24 V DC		

Output

Output current, max.	25 A	Overload and short circuit protection	25 A fuse
Parallel connection option	Yes	Temperature probe	NTC 100 kΩ

General data

Ambient temperature	Charge: -15...+50°C, Discharge: -20...+60°C	Clip-in foot	metal
Humidity	5...95 % RH	Life expectancy	5.65 year
Shock wall acc. to IEC 68227	30 g	Vibration DIN rail/wall in accordance with IEC 68-2-6	0.7 / 0.7 g

Insulation coordination

Protection class	III, with no ground connection, for SELV
------------------	---------------------------------------------

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	6	Conductor cross-section, AWG/kcmil , min.	24
Conductor cross-section, flexible , min.	0.5 mm ²	Conductor cross-section, rigid , max.	16 mm ²
Conductor cross-section, rigid , min.	0.5 mm ²	Wire connection cross section, flexible (input), max.	10 mm ²

Connection data (signal)

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	16	Wire cross-section, AWG/kcmil , min.	24
Wire cross-section, solid , max.	1.5 mm ²	Wire cross-section, solid , min.	0.2 mm ²

Creation date June 1, 2022 6:37:29 PM CEST

Catalogue status 20.05.2022 / We reserve the right to make technical changes.

DURA ECO LA-BAT 24V 3.4AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Approvals

Certificate no. (cULus)	E258476	Institute (cULus)	www.weidmueller.com
-------------------------	---------	-------------------	---------------------

Classifications

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92	ECLASS 12.0	27-04-06-92

Approvals

Approvals



ROHS	Conform
UL File Number Search	E258476

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
User Documentation	Instruction sheets

DURA ECO LA-BAT 24V 3.4AH

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings

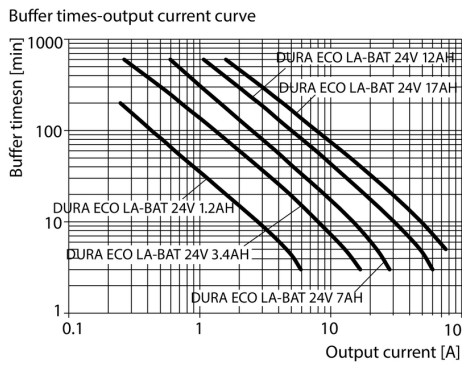

Buffer Time

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [UPS - Uninterruptible Power Supplies](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[SMT3000RMI2U](#) [SMART-1400-RM](#) [UPS1500ITSIT](#) [TRIO-UPS-2G/3AC/24DC/20](#) [QUINT4-UPS/24DC/24DC/20/EI](#) [QUINT4-UPS/24DC/24DC/40/EI](#) [QUINT4-UPS/24DC/24DC/10/US](#) [QUINT4-UPS/24DC/24DC/20/US](#) [QUINT4-UPS/24DC/24DC/40/US](#)
[SDU24EXTBC6B](#) [2786240000](#) [2789890000](#) [TSPC 240-124UPS](#) [1251220000](#) [SDUCFRELAYCARD](#) [SDUCFRELAYCARD](#)
[SDUMBUSCARD](#) [SDU-PMBRK](#) [S8BA-24D24D480SBF](#) [6EP1931-2EC21](#) [6EP1931-2FC21](#) [6EP1933-2EC51](#) [SDU-24-BAT](#) [6EP1931-2DC21](#) [CBI2801224A](#) [BR1500GI](#) [SPUBC24120](#) [DRU-24V10ACZ](#) [DRU-24V40ABN](#) [DR-UPS40](#) [5P2200RT](#) [9PX2000RT](#) [9PX3000GRT-L](#)
[9PX3000RTN](#) [NETWORK-M2](#) [EA-UPS INFORMER](#) [GUARD LCD2 650 AP](#) [DUPS40](#) [SC620](#) [S8BA-24D24D120LF](#) [S8BA-24D24D240LF](#)
[UPS003LSM](#) [MINI-BAT/12DC/1.6AH](#) [1067327](#) [1081430](#) [1082548](#) [1110155](#) [1274119](#) [1274520](#) [1283116](#) [2320212](#)