

DURA ECO LA-BAT 24V 7AH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

General ordering data

Version	Battery
Order No.	2789910000
Type	DURA ECO LA-BAT 24V 7AH
GTIN (EAN)	4064675068662
Qty.	1 pc(s).

DURA ECO LA-BAT 24V 7AH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	135 mm	Depth (inches)	5.315 inch
Height	158 mm	Height (inches)	6.22 inch
Width	162 mm	Width (inches)	6.378 inch
Net weight	6,120 g		

Temperatures

Storage temperature	-20 °C...60 °C	Humidity	5...95 % RH
---------------------	----------------	----------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	30bf869c-8adc-4ed2-ad02-c1fec963e943
------------	----------------	------	--------------------------------------

Operating interfaces and control inputs

Temperature probe	NTC 100 kΩ
-------------------	------------

Input

Charging current, max.	1.08 A	Nominal capacity	7 Ah
Rated input voltage	24 V DC		

Output

Buffer time 10A	26.5 min	Buffer time 20A	11.5 min
Buffer time 40A	5 min	Output current, max.	50 A
Overload and short circuit protection	2x25 A fuse	Parallel connection option	Yes
Temperature probe	NTC 100 kΩ		

General data

Ambient temperature	Charge: -15...+50°C, Discharge: -20...+60°C	Humidity	5...95 % RH
Life expectancy	5.65 year	Shock wall acc. to IEC 68227	30 g
Vibration DIN rail/wall in accordance with IEC 68-2-6	- / 0.7 g		

Insulation coordination

Protection class	III, with no ground connection, for SELV
------------------	--

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	6	Conductor cross-section, AWG/kcmil , min.	24
Conductor cross-section, flexible , min.	0.5 mm ²	Conductor cross-section, rigid , max.	16 mm ²
Conductor cross-section, rigid , min.	0.5 mm ²	Wire connection cross section, flexible (input), max.	10 mm ²

DURA ECO LA-BAT 24V 7AH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data**Connection data (signal)**

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	16	Wire cross-section, AWG/kcmil , min.	24
Wire cross-section, solid , max.	1.5 mm ²	Wire cross-section, solid , min.	0.2 mm ²

Approvals

Certificate no. (cULus)	E258476	Institute (cULus)	CULUS
-------------------------	---------	-------------------	-------

Classifications

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92	ECLASS 12.0	27-04-06-92

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E258476

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN
User Documentation	Instruction sheets

DURA ECO LA-BAT 24V 7AH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

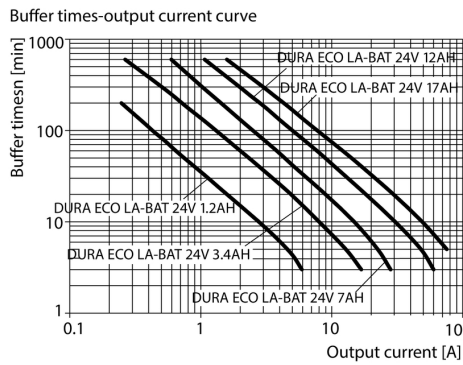

Buffer Time

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [UPS - Uninterruptible Power Supplies](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[SMT3000RMI2U](#) [SMART-1400-RM](#) [UPS1500ITSIT](#) [TRIO-UPS-2G/3AC/24DC/20](#) [QUINT4-UPS/24DC/24DC/20/EI](#) [QUINT4-UPS/24DC/24DC/40/EI](#) [QUINT4-UPS/24DC/24DC/10/US](#) [QUINT4-UPS/24DC/24DC/20/US](#) [QUINT4-UPS/24DC/24DC/40/US](#)
[SDU24EXTBC6B](#) [2786240000](#) [2789890000](#) [TSPC 240-124UPS](#) [1251220000](#) [SDUCFRELAYCARD](#) [SDUCFRELAYCARD](#)
[SDUMBUSCARD](#) [SDU-PMBRK](#) [S8BA-24D24D480SBF](#) [6EP1931-2EC21](#) [6EP1931-2FC21](#) [6EP1933-2EC51](#) [SDU-24-BAT](#) [6EP1931-2DC21](#) [CBI2801224A](#) [BR1500GI](#) [SPUBC24120](#) [DRU-24V10ACZ](#) [DRU-24V40ABN](#) [DR-UPS40](#) [5P2200RT](#) [9PX2000RT](#) [9PX3000GRT-L](#)
[9PX3000RTN](#) [NETWORK-M2](#) [EA-UPS INFORMER](#) [GUARD LCD2 650 AP](#) [DUPS40](#) [SC620](#) [S8BA-24D24D120LF](#) [S8BA-24D24D240LF](#)
[UPS003LSM](#) [MINI-BAT/12DC/1.6AH](#) [1067327](#) [1081430](#) [1082548](#) [1110155](#) [1274119](#) [1274520](#) [1283116](#) [2320212](#)