


WTR 4 BL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

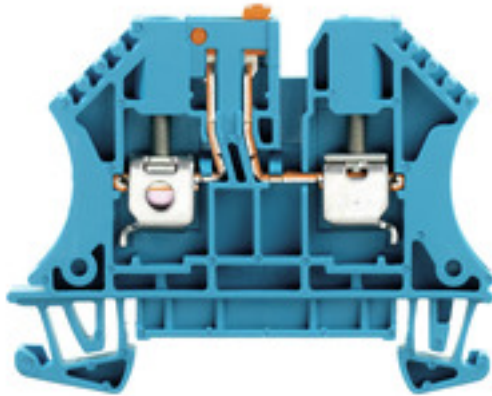Product image**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | |
|------------|---|
| Version | Test-disconnect terminal, Screw connection, 4 mm ² , 500 V, 32 A, Pivoting, blue |
| Order No. | 7910190000 |
| Type | WTR 4 BL |
| GTIN (EAN) | 4008 190576875 |
| Qty. | 50 pc(s). |

Creation date January 30, 2022 6:57:04 AM CET

Catalogue status 14.01.2022 / We reserve the right to make technical changes.

WTR 4 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------------------------|------------|----------------|-----------|
| Depth | 48 mm | Depth (inches) | 1.89 inch |
| Depth including DIN rail | 49 mm | Height | 60 mm |
| Height (inches) | 2.362 inch | Width | 6.1 mm |
| Width (inches) | 0.24 inch | Net weight | 11.554 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 120 °C | | |

Material data

| | | | |
|---------------------------|-------|--------|------|
| Material | Wemid | Colour | blue |
| UL 94 flammability rating | V-0 | | |

Rating data IECEx/ATEX

| | | | |
|--------------------------------|------------------|---------------------------------|-------------------|
| Certificate No. (ATEX) | DEMKO14ATEX1389U | Certificate No. (IECEX) | IECEXUL14.0097U |
| Max. voltage (ATEX) | 400 V | Current (ATEX) | 32 A |
| Wire cross section max. (ATEX) | 4 | Max. voltage (IECEX) | 400 V |
| Current (IECEX) | 32 A | Wire cross section max. (IECEX) | 4 mm ² |
| Marking EN 60079-7 | Ex ec II C Gc | Ex 2014/34/EU label | II 3 G D |

System specifications

| | | | |
|-------------------------------------|--|-------------------------------|-----|
| Version | Screw connection, Spacer, for plug-in cross- connector, One end without connector | End cover plate required | Yes |
| Number of potentials | 1 | Number of levels | 1 |
| Number of clamping points per level | 2 | Number of potentials per tier | 1 |
| Levels cross-connected internally | No | PE connection | No |
| Rail | TS 35 | N-function | Yes |
| PE function | No | PEN function | No |

2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)

| | | | |
|--|---------------------|--|---------------------|
| Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max. | 1.5 mm ² | Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min. | 0.5 mm ² |
| Wire connection cross section, finely stranded, two clampable wires, min. | 0.5 mm ² | Wire cross-section, finely stranded, two clampable wires, max. | 1.5 mm ² |

Additional technical data

| | | | |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | No | Number of similar terminals | 1 |
| Open sides | right | Type of mounting | Snap-on |

CSA rating data

| | | | |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA) | 200039-1057876 | Current size C (CSA) | 10 A |
| Voltage size C (CSA) | 300 V | Wire cross section max. (CSA) | 10 AWG |
| Wire cross section min. (CSA) | 22 AWG | | |

WTR 4 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 0.6 x 3.5 mm | Clamping range, max. | 6 mm ² |
| Clamping range, min. | 0.22 mm ² | Clamping screw | M 3 |
| Connection cross-section, stranded, max. | 4 mm ² | Connection cross-section, stranded, min. | 1.5 mm ² |
| Connection direction | on side | Gauge to IEC 60947-1 | A4 |
| Number of connections | 2 | Stripping length | 13 mm |
| Tightening torque, max. | 0.6 Nm | Tightening torque, min. | 0.5 Nm |
| Torque level with DMS electric screwdriver | 2 | Type of connection | Screw connection |
| Wire connection cross section AWG, max. | AWG 10 | Wire connection cross section AWG, min. | AWG 22 |
| Wire connection cross section, finely stranded, max. | 4 mm ² | Wire connection cross section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 6 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

Disconnect terminals

| | | | |
|------------------|----------|----------------------|----|
| Cross-disconnect | without | Integral test socket | No |
| Slitting | Pivoting | | |

General

| | | | |
|---|--------|---|--------|
| Rail | TS 35 | Wire connection cross section AWG, max. | AWG 10 |
| Wire connection cross section AWG, min. | AWG 22 | | |

Rating data

| | | | |
|--|-------------------|---------------------------------|-------|
| Rated cross-section | 4 mm ² | Rated voltage | 500 V |
| Rated current | 32 A | Current at maximum wires | 32 A |
| Volume resistance according to IEC 60947-7-x | 1 mΩ | Rated impulse withstand voltage | 6 kV |
| Power loss in accordance with IEC 60947-7-x | 1.02 W | Pollution severity | 3 |

UL rating data

| | | | |
|---|--------|---|--------|
| Certificate No. (UR) | E60693 | Conductor size Factory wiring max. (UR) | 10 AWG |
| Conductor size Factory wiring min. (UR) | 22 AWG | Conductor size Field wiring max. (UR) | 10 AWG |
| Conductor size Field wiring min. (UR) | 22 AWG | Current size D (UR) | 10 A |
| Voltage size D (UR) | 300 V | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000902 | ETIM 7.0 | EC000902 |
| ETIM 8.0 | EC000902 | ECLASS 9.0 | 27-14-11-26 |
| ECLASS 9.1 | 27-14-11-26 | ECLASS 10.0 | 27-14-11-26 |
| ECLASS 11.0 | 27-14-11-26 | | |

Creation date January 30, 2022 6:57:04 AM CET

Catalogue status 14.01.2022 / We reserve the right to make technical changes.

WTR 4 BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



| | |
|-----------------------|---------|
| ROHS | Conform |
| UL File Number Search | E60693 |

Downloads

| | |
|---|--|
| Approval/Certificate/Document of Conformity | Attestation of Conformity ATEX Certificate IECEX Certificate CB Test Certificate CB Certificate EAC certificate EAC EX Certificate CCC Ex Certificate CE Declaration of Conformity CE Declaration of Conformity all terminals |
| Engineering Data | CAD data – STEP |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| User Documentation | Beipackzettel_WTR4.pdf NTI WTR 4 Usage of terminals in EXi atmospheres StorageConditionsTerminalBlocks |
| Catalogues | Catalogues in PDF-format |
| Brochures | |


Data sheet

WTR 4 BL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



WTR 4 BL

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

4 mm²

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

General ordering data

| | |
|------------|----------------------------|
| Type | ZQV 4N/32 |
| Order No. | 2561670000 |
| GTIN (EAN) | 4050118570175 |
| Qty. | 5 pc(s). |
| Type | ZQV 4N/5 RD |
| Order No. | 2460790000 |
| GTIN (EAN) | 4050118476217 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/7 BL |
| Order No. | 1528180000 |
| GTIN (EAN) | 4050118333114 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/30 |
| Order No. | 2561580000 |
| GTIN (EAN) | 4050118570113 |
| Qty. | 5 pc(s). |
| Type | ZQV 4N/10 BL |
| Order No. | 1528230000 |
| GTIN (EAN) | 4050118333138 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/9 BL |
| Order No. | 1528220000 |
| GTIN (EAN) | 4050118333107 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/7 |
| Order No. | 1528020000 |
| GTIN (EAN) | 4050118332780 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/2 RD |
| Order No. | 2460450000 |
| GTIN (EAN) | 4050118476149 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/50 |
| Order No. | 1528130000 |
| GTIN (EAN) | 4050118332902 |
| Qty. | 5 pc(s). |
| Type | ZQV 4N/30 RD |
| Order No. | 2561600000 |
| GTIN (EAN) | 4050118569964 |
| Qty. | 5 pc(s). |

Creation date January 30, 2022 6:57:04 AM CET

WTR 4 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | |
|------------|----------------------------|
| Type | ZQV 4N/6 BL |
| Order No. | 1528170000 |
| GTIN (EAN) | 4050118332926 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/6 |
| Order No. | 1527990000 |
| GTIN (EAN) | 4050118332919 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/4 BL |
| Order No. | 1528120000 |
| GTIN (EAN) | 4050118332872 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/2 |
| Order No. | 1527930000 |
| GTIN (EAN) | 4050118332766 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/5 |
| Order No. | 1527980000 |
| GTIN (EAN) | 4050118332759 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/30 BL |
| Order No. | 2561610000 |
| GTIN (EAN) | 4050118569971 |
| Qty. | 5 pc(s). |
| Type | ZQV 4N/10 RD |
| Order No. | 2460740000 |
| GTIN (EAN) | 4050118476163 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/3 |
| Order No. | 1527940000 |
| GTIN (EAN) | 4050118332865 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/3 BL |
| Order No. | 1528080000 |
| GTIN (EAN) | 4050118333008 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/4 |
| Order No. | 1527970000 |
| GTIN (EAN) | 4050118332889 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/10 |
| Order No. | 1528090000 |
| GTIN (EAN) | 4050118332896 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/8 |
| Order No. | 1528030000 |
| GTIN (EAN) | 4050118332841 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/8 RD |
| Order No. | 2460760000 |
| GTIN (EAN) | 4050118476187 |
| Qty. | 20 pc(s). |

Creation date January 30, 2022 6:57:04 AM CET

Catalogue status 14.01.2022 / We reserve the right to make technical changes.

WTR 4 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | |
|------------|----------------------------|
| Type | ZQV 4N/4 RD |
| Order No. | 2460800000 |
| GTIN (EAN) | 4050118476224 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/6 RD |
| Order No. | 2460780000 |
| GTIN (EAN) | 4050118476200 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/50 RD |
| Order No. | 2460730000 |
| GTIN (EAN) | 4050118476156 |
| Qty. | 5 pc(s). |
| Type | ZQV 4N/9 |
| Order No. | 1528070000 |
| GTIN (EAN) | 4050118332797 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/5 BL |
| Order No. | 1528140000 |
| GTIN (EAN) | 4050118333015 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/3 RD |
| Order No. | 2460810000 |
| GTIN (EAN) | 4050118476231 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/2 BL |
| Order No. | 1528040000 |
| GTIN (EAN) | 4050118332773 |
| Qty. | 60 pc(s). |
| Type | ZQV 4N/9 RD |
| Order No. | 2460750000 |
| GTIN (EAN) | 4050118476170 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/50 BL |
| Order No. | 1528240000 |
| GTIN (EAN) | 4050118333121 |
| Qty. | 5 pc(s). |
| Type | ZQV 4N/8 BL |
| Order No. | 1528190000 |
| GTIN (EAN) | 4050118332858 |
| Qty. | 20 pc(s). |
| Type | ZQV 4N/7 RD |
| Order No. | 2460770000 |
| GTIN (EAN) | 4050118476194 |
| Qty. | 20 pc(s). |

WTR 4 BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

WS 12/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.


Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WS 12/6 MM WS | Version |
| Order No. | 2007200000 | WS, Terminal marker, 12 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391886 | |
| Qty. | 600 pc(s). | |

Component plugs



The component plug is used to integrate an electrical component in a disconnect terminal block. After soldering the electronic component, the plug can be integrated into the disconnection area of our disconnect terminal blocks and thus changes the disconnect terminal block into a modular terminal block with integrated electronic component.

General ordering data

| | | |
|------------|----------------------------|-----------------------------------|
| Type | BEST/DRBR | Version |
| Order No. | 1878570000 | Accessories, Component plug, 22 A |
| GTIN (EAN) | 4032248471508 | |
| Qty. | 50 pc(s). | |
| Type | BEST/D | Version |
| Order No. | 1878560000 | Accessories, Component plug, 1 A |
| GTIN (EAN) | 4032248471492 | |
| Qty. | 50 pc(s). | |

WTR 4 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|-----------------------------|
| Type | BEST | Version |
| Order No. | 1833100000 | Accessories, Component plug |
| GTIN (EAN) | 4032248501014 | |
| Qty. | 50 pc(s). | |

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC NE WS | Version |
| Order No. | 1609820000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436 | Weidmueller, white |
| Qty. | 1,000 pc(s). | |

Fuse holder



The fuse holder SIHA quickly turns a disconnect terminal into a fuse terminal: simply remove the disconnect lever and attach the fuse unit.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | SIHA 3/G20 | Version |
| Order No. | 7921560000 | Accessories, Fuse holder, Rated cross-section: Plug-in connection, |
| GTIN (EAN) | 4032248264643 | Wemid, dark beige, Operating instructions/catalogue |
| Qty. | 25 pc(s). | |
| Type | SIHA 3/G20/LD 140-250V | Version |
| Order No. | 7921600000 | Accessories, Fuse holder, Rated cross-section: Plug-in connection, |
| GTIN (EAN) | 4032248322633 | Wemid, dark beige, Operating instructions/catalogue |
| Qty. | 25 pc(s). | |

Creation date January 30, 2022 6:57:04 AM CET

Catalogue status 14.01.2022 / We reserve the right to make technical changes.

10

WTR 4 BL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|--|
| Type | SIHA 3/G20/LD 10-36V | Version |
| Order No. | 7921570000 | Accessories, Fuse holder, Rated cross-section: Plug-in connection, |
| GTIN (EAN) | 4032248322503 | Wemid, dark beige, Operating instructions/catalogue |
| Qty. | 25 pc(s). | |

Disconnect plugs



In contrast to the terminal blocks with integrated disconnect lever, our disconnect plugs can be completely detached or removed from the terminal block and the respective application and offer a flexible alternative solution to our standard disconnectors.

General ordering data

| | | |
|------------|----------------------------|------------------------------------|
| Type | TNST | Version |
| Order No. | 1833090000 | Accessories, Disconnect plug, 20 A |
| GTIN (EAN) | 4032248471485 | |
| Qty. | 50 pc(s). | |

DEK 5/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/6 MM WS | Version |
| Order No. | 2007120000 | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104 | |
| Qty. | 600 pc(s). | |

WTR 4 BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | WEW 35/2 | Version |
| Order No. | 1061200000 | W-Series, End bracket |
| GTIN (EAN) | 4008190030230 | |
| Qty. | 50 pc(s). | |

Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

General ordering data

| | | |
|------------|----------------------------|--------------------------|
| Type | SDS 0.6X3.5X100 | Version |
| Order No. | 9008330000 | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056286 | |
| Qty. | 1 pc(s). | |

WTR 4 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

2.5-10 mm²2.5-10
mm²

End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

| | | |
|------------|----------------------------|--------------------------------------|
| Type | WAP 16+35 WTW 2.5-10 | Version |
| Order No. | 1050100000 | W-Series, End plate, Partition plate |
| GTIN (EAN) | 4008190079901 | |
| Qty. | 20 pc(s). | |
| Type | WAP 2.5-10 | Version |
| Order No. | 1050000000 | W-Series, End plate |
| GTIN (EAN) | 4008190103149 | |
| Qty. | 50 pc(s). | |

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WS 12/6 MC NE WS | Version |
| Order No. | 1609900000 | WS, Terminal marker, 12 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4008190203467 | Allen-Bradley, white |
| Qty. | 600 pc(s). | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Terminal Blocks](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[00110420202](#) [8WA1011-1BH23](#) [8WA1011-1EF20](#) [91.010](#) [9102100000](#) [91.040](#) [9123140000](#) [9123140001](#) [RBO 5-T-B-HEX](#) [1333564](#) [DP25-GY-ND](#) [1431306](#) [1433306](#) [HSL-TB64-DIN](#) [90.070](#) [91.020](#) [912314](#) [260-301_NR](#) [2757571](#) [280-331](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [2909798](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#) [284-601](#) [2907033](#) [3048496](#) [5542152](#) [35956](#) [USK 10](#) [102510](#) [1025100000](#) [5520682](#) [5607102](#) [EMH 25-ZE30](#) [591620-2](#) [UM 45-SEFE](#) [M.NUT BK](#) [1-591651-1](#)