


MICROSERIES
MRS 24Vdc 1CO

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

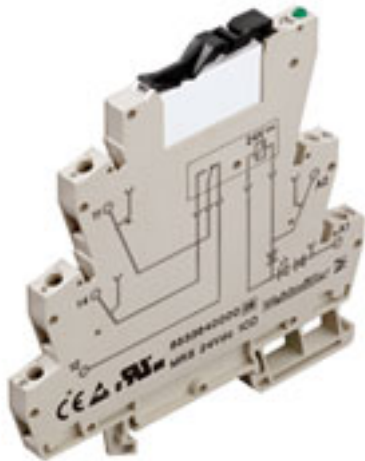

Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

General ordering data

Order No.	8533640000
Part designation	MRS 24Vdc 1CO
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, Rated control voltage: 24 V DC ±20 %, Screw connection
GTIN (EAN)	4032248169740
Qty.	10 pc(s).

MICROSERIES MRS 24Vdc 1CO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data

Dimensions

Length	93 mm	Width	6.1 mm
Height	92 mm		

Temperature

Ambient temperature (operational)	-25 °C...+50 °C	Storage temperature	-40 °C...+60 °C
-----------------------------------	-----------------	---------------------	-----------------

Input

Rated voltage	300 V	Rated control voltage	24 V DC ±20 %
Pull-in (sparkover) / drop-out voltage DC coil	15.4 V / 6.5 V	Rated current DC	6.6 mA
Pull-in / drop-out current, DC coil	4mA/1.2mA	Power rating	160 mW
Status indicator	Green LED		

Output

Continuous current	6 A	Max. switching current	6 A
Max. switching frequency at rated load	0.1 Hz	Switch-off delay	7.5 ms
Switch-on delay	9.3 ms	Switching voltage AC, max.	250 V
making current	6 A	max. switching capacity	1500 VA
min. switching capacity	12 V / 100 mA		

Contact data

Contact design	CO contact	No. of contacts	1
Contact material	AgSnO	Mechanical service life	20 x 10 ⁶ switching cycles

Rated data

Conductor connection system	Screw connection	DIN Rail compatibility	TS 35
Humidity	40°C / 93% rel. humidity, no condensation		

Insulation coordination (EN 50 178)

Clearance and creepage distances for control/load side	≥ 5.5 mm	Dielectric strength to mounting rail	4 kV _{eff} / 1 min.
Impulse withstand voltage	6 kV (1.2/50 μs)	Overvoltage category	III
Pollution severity	2	Protection class	IP 20
Protective separation acc. to VDE 0106 part 101	Yes	Rated voltage	300 V

Other technical data

Free-wheel diode	Yes	Reverse polarity protection	Available
Status indicator	Green LED	Version	Relay coupler

Approvals

Approvals institutes	CSA; CULUS; CURUS; GOSTME25; CE; ROHS
----------------------	--

Datasheet**MICROSERIES
MRS 24Vdc 1CO**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Technical data**Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01

Notes


Note, technical data Cross-connectors and markers - refer to MICROSERIES accessories

**MICROSERIES
MRS 24Vdc 1CO**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Drawings

Electric symbol

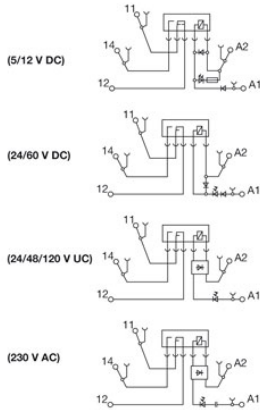

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)