


**MICROSERIES  
MRZ 24VDC 1CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
www.weidmueller.com

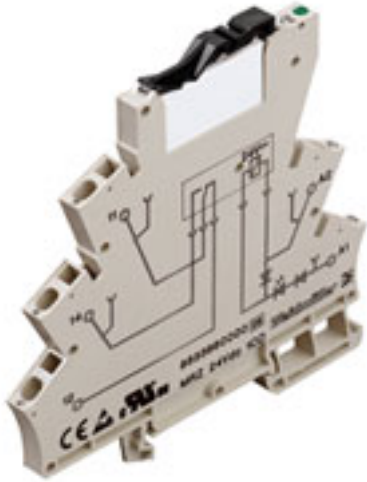

Relays of the MICROSERIES are used for isolating and coupling digital signals.

They are characterised by the following features:

- modular width 6.1 mm
- Pluggable relay
- Pluggable cross-connection for four voltages in input and output circuits,
- innovative retention and ejection aid,
- LED operating indicator, reverse polarity protection diode, free-wheeling diode

**General ordering data**

Order No.	<a href="#">8533660000</a>
Part designation	MRZ 24VDC 1CO
Version	MICROSERIES, Relays, No. of contacts: 1, CO contact, Rated control voltage: 24 V DC ±20 %, Tension clamp connection
GTIN (EAN)	4032248169757
Qty.	10 pc(s).

## MICROSERIES MRZ 24VDC 1CO

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

## Technical data

### Dimensions

Length	94 mm	Width	6.1 mm
Height	91 mm		

### Temperature

Ambient temperature (operational)	-25 °C...+50 °C	Storage temperature	-40 °C...+60 °C
-----------------------------------	-----------------	---------------------	-----------------

### Input

Rated voltage	300 V	Rated control voltage	24 V DC ±20 %
Pull-in (sparkover) / drop-out voltage DC coil	15.4 V / 6.5 V	Rated current DC	6.6 mA
Pull-in / drop-out current, DC coil	4mA/1.2mA	Power rating	160 mW
Status indicator	Green LED		

### Output

Continuous current	6 A	Max. switching current	6 A
Max. switching frequency at rated load	0.1 Hz	Switch-off delay	7.5 ms
Switch-on delay	9.3 ms	Switching voltage AC, max.	250 V
making current	6 A	max. switching capacity	1500 VA
min. switching capacity	12 V / 100 mA		

### Contact data

Contact design	CO contact	No. of contacts	1
Contact material	AgSnO	Mechanical service life	20 x 10 <sup>6</sup> switching cycles

### Rated data

Conductor connection system	Tension clamp connection	DIN Rail compatibility	TS 35
Humidity	40°C / 93% rel. humidity, no condensation		

### Insulation coordination (EN 50 178)

Clearance and creepage distances for control/load side	≥ 5.5 mm	Dielectric strength to mounting rail	4 kV <sub>eff</sub> / 1 min.
Impulse withstand voltage	6 kV (1.2/50 µs)	Overvoltage category	III
Pollution severity	2	Protection class	IP 20
Protective separation acc. to VDE 0106 part 101	Yes	Rated voltage	300 V

### Other technical data

Free-wheel diode	Yes	Reverse polarity protection	Available
Status indicator	Green LED	Version	Relay coupler

### Approvals

Approvals institutes	CSA; CULUS; CURUS; GOSTME25; CE
----------------------	------------------------------------

**MICROSERIES  
MRZ 24VDC 1CO**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-2083  
[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Classifications**

ETIM 2.0	EC001437	ETIM 3.0	EC001437
eClass 5.1	27-37-16-01	eClass 6.0	27-37-16-01

**Notes**


Note, technical data      Cross-connectors and markers - refer to MICROSERIES accessories

**MICROSERIES  
MRZ 24VDC 1CO**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-2083  
 www.weidmueller.com

**Drawings**

**Electric symbol**

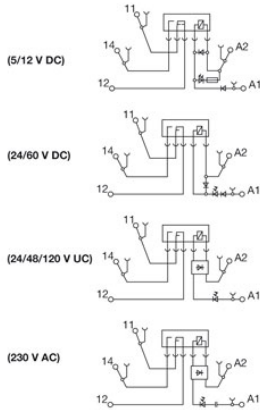

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [weidmuller](#) manufacturer:*

Other Similar products are found below :

[8924550000](#) [56956](#) [0133660000](#) [6720000227](#) [6720005111](#) [68676](#) [69718](#) [EXO24CH](#) [7940000218](#) [8005181001](#) [8008180000](#) [8432240000](#)  
[8463580000](#) [8545830000](#) [8689870000](#) [8705640000](#) [8869870000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#)  
[9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#) [9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [9159530000](#) [919656](#) [919764](#)  
[9202230000](#) [9202850000](#) [9204260000](#) [9456750000](#) [9457913000](#) [980811](#) [980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#)  
[9919371205](#) [9919371224](#) [9925710000](#) [9926252005](#) [9927480024](#)