


**WAS5 DC/ALARM****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**General ordering data**

Version	Limit value monitoring, Input : 0-20 mA, 0-10 V, Output : 2 x relays
Order No.	<a href="#">8543820000</a>
Type	WAS5 DC/ALARM
GTIN (EAN)	4032248181230
Qty.	1 pc(s).

Creation date January 30, 2022 8:06:32 AM CET

Catalogue status 14.01.2022 / We reserve the right to make technical changes.

## WAS5 DC/ALARM

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	112.4 mm	Depth (inches)	4.425 inch
Width	17.5 mm	Width (inches)	0.689 inch
Length	92.4 mm	Length (inches)	3.638 inch
Weight	137 g	Net weight	110.1 g

### Temperatures

Storage temperature	-20 °C...85 °C	Operating temperature	0 °C...55 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

### Probability of failure

MTTF	369 Jahre
------	-----------

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

### Input

Input current	0(4)...20 mA	Input resistance, current	≤ 110 Ω
Input resistance, voltage	≥ 100 kΩ	Input voltage	0...10 V
Number of inputs	1		

### Output

Contact material	AgNi 90/10	Status indicator	LED green ON: OK, LED red ON: alarm (per channel)
Switching thresholds	1...90 % (independently for channel 1 and channel 2)		

### Output (digital)

Alarm function	configurable, High or low alarm, Hysteresis 5% / 10%	Contact material	AgNi 90/10
Continuous current	3 A	Hysteresis	1...10 % (independent for channel 1 and channel 2)
Max. switching voltage, AC	250 V	Type	2 CO contacts, Open or closed-circuit principle

### General data

Accuracy	Repeat accuracy: max. ± 0.3% of measuring range end value (10 V/ 20 mA)	Configuration	DIP switch, Potentiometer
Current-carrying capacity of cross- connect.	≤ 2 A	Galvanic isolation	3-way isolator
Input/Output	0...10 V, 0(4)...20 mA / 2 CO contact	Power consumption	Typ.: 1 W both relays picked up
Rail	TS 35	Temperature coefficient	≤ 500 ppm/K
Type of connection	Screw connection	Voltage supply	24 V DC ± 25 %

Creation date January 30, 2022 8:06:32 AM CET

## WAS5 DC/ALARM

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Insulation coordination

Clearance & creepage distances	≥ 3 mm	EMC standards	EN 61000-4-2, -3, -4, -5, -6
Galvanic isolation	3-way isolator	Impulse withstand voltage	4 kV
Insulation voltage	2 kV <sub>eff</sub> / 5 s	Pollution severity	2
Rated voltage	300 V	Surge voltage category	III

### Connection data

Type of connection	Screw connection	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>

### Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-20	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20		

## WAS5 DC/ALARM

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Tender specification sheets

Long specification

Short specification

**Limit-value monitoring component for DC-current/ voltage standard signals with relay output and 3-way electrical isolation.**

**Limit-value monitoring component in 22.5 mm width for recording 0(4)...20 mA / 0...10 V standard signals. Two relay contacts (COs), each with a switching capacity of 750 VA, are available on the output side for monitoring an upper and lower limit. The switching behaviour (high/low trip, fail-safe) can be selected using DIP switches.**

**Switching thresholds and hystereses can be adjusted with the front-side potentiometer. The component has 4 kV of 3-way isolation and is supplied externally with 24 VDC.**

**Add-on housing for TS35 rail mounting  
Dimensions: L/W/H  
92.4/ 22.5/ 112.4 mm  
Screw connection /  
Nominal cross-section  
2.5 mm<sup>2</sup>**

**Protection degree: IP  
20**

**Input  
0(4)...20 mA / 0...10 V  
Output  
2 x relay / CO**

**Open-circuit/closed-circuit principle  
Switching current 3 A  
Switching voltage 6...  
250 V AC / 6...60 V DC  
Switching thresholds  
1...90 % via  
potentiometer  
(independently for  
channels 1 and 2)**

**Hysteresis  
1% ... 10 % via  
potentiometer  
(independently for  
channels 1 and 2)  
Temperature  
coefficient < 500 ppm  
K**

**Step response  
time < 60 ms**

**0.320 A**

**Auxiliary**

**power**

**24 VDC - 25 W**

**Ambient**

**Limit-value monitoring component for DC-current/voltage standard signals with relay output and 3-way electrical isolation.**

**Limit-value monitoring component in 22.5 mm width for recording 0(4)...20 mA / 0...10 V standard signals. Two**

Creation date January 30, 2022 8:00:39 AM CET

Catalogue status 14.01.2022 / Weidmüller reserves the right to make technical changes.

**WAS5 DC/ALARM**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Important note**

Product information                      This product will soon be replaced by a new product.  
 Please do not use with new systems. Please contact our technical support.

**Approvals**

Approvals



ROHS    Conform  
 UL File Number Search                      E141197

**Downloads**

Approval/Certificate/Document of  
 Conformity                                      [Declaration of Conformity](#)  
 Engineering Data                              [CAD data – STEP](#)  
 User Documentation                           [instruction sheet](#)  
 Catalogues                                      [Catalogues in PDF-format](#)  
 Brochures


**WAS5 DC/ALARM**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


**Drawings**

www.weidmueller.com


**Connection diagram**

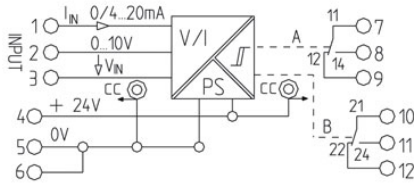

**Example 1**

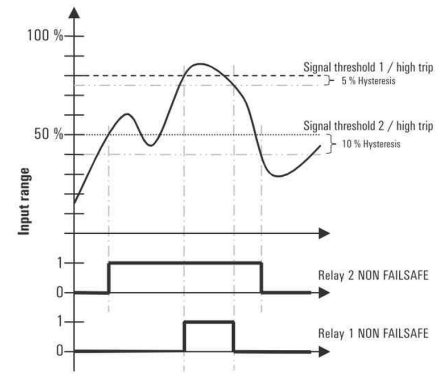

**Example 2**

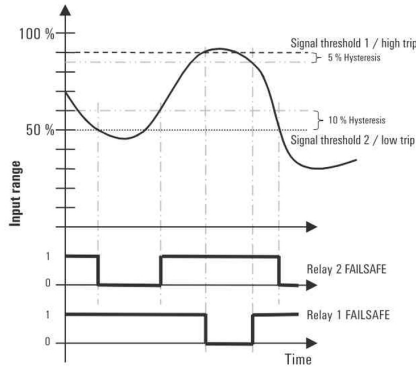

**Switch position/setting options**

function	SW 1			
	1	2	3	4
Channel A High Trip	■			
Channel A Low Trip	□			
Channel B High Trip		■		
Channel B Low Trip		□		
FAILSAFE, Channel 1 & 2			□	□
NON FAILSAFE, Chan. 1 & 2			■	■

■ = on  
 □ = off

## WAS5 DC/ALARM

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

Type	WS 10/5 MC NE WS	Version
Order No.	<a href="#">1635000000</a>	WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller,
GTIN (EAN)	4008190261948	Allen-Bradley, white
Qty.	720 pc(s).	

2.5 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

Type	ZQV 2.5N/2 BL	Version
Order No.	<a href="#">1717990000</a>	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349295	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 RT	Version
Order No.	<a href="#">1717900000</a>	Accessories, Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190349288	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 GE	Version
Order No.	<a href="#">1693800000</a>	Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190883621	
Qty.	60 pc(s).	

**WAS5 DC/ALARM**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Accessories**

Type	ZQV 2.5N/2 SW	Version
Order No.	<a href="#">1718080000</a>	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349301	
Qty.	60 pc(s).	



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminal Block Interface Modules](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[73-551-6002I](#) [GCN1MX25B](#) [DIN-50P-01](#) [DIN-68H-01](#) [DIN-96DI-01](#) [2291901](#) [2295185](#) [2907794](#) [2M10FCL](#) [FLKM-2I/O](#) [FLKM-4I/O](#)  
[2281759](#) [2906251](#) [2907808](#) [5601749](#) [5541962](#) [1776613-1](#) [GCN1-004A](#) [ADAM-3920R-AE](#) [060-6827-06](#) [2311030](#) [2287708](#) [XW2C-20G6-](#)  
[IO16](#) [GCN1-T](#) [MACX](#) [MCR-VAC](#) [5775235](#) [ADAM-3956-BE](#) [XW6T-COM2.5X20YL](#) [XW6T-COM1.5X8BL](#) [XW6T-COM1.5X16BL](#)  
[XW6T-COM1.5X20YL](#) [XW6T-COM1.5X16YL](#) [XW6T-COM1.5X20RD](#) [XW6T-COM1.5X20BL](#) [XW6T-COM2.5X8BL](#) [1976610000](#) [UM](#)  
[45-D50SUB/B/ZFKDS](#) [5541234](#) [410-261](#) [2906243](#) [2906915](#) [2907706](#) [ADAM-3909-AE](#) [ADAM-3920-AE](#) [ADAM-3925-AE](#) [ADAM-3937-](#)  
[BE](#) [ADAM-3950-AE](#) [ADAM-3951-BE](#) [ADAM-3968-AE](#) [ADAM-3968/50-AE](#)