

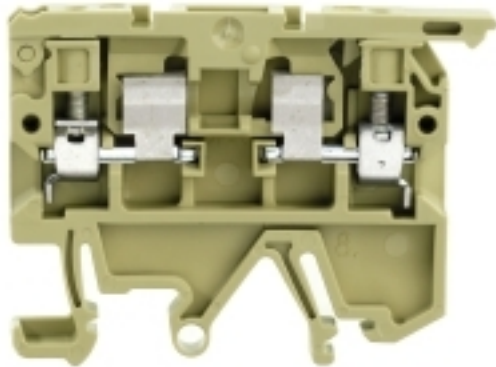
**ASK1EN/SMT 10-60VUC BFI H+****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

Similar to illustration

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

**General ordering data**

Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm <sup>2</sup> , Screw connection
Order No.	<a href="#">9123140001</a>
Type	ASK1EN/SMT 10-60VUC BFI H+
GTIN (EAN)	4032248730919
Qty.	100 pc(s).

Creation date September 18, 2022 4:36:54 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

**ASK1EN/SMT 10-60VUC BFI H+****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	43 mm	Depth (inches)	1.693 inch
Height	58 mm	Height (inches)	2.283 inch
Width	8.1 mm	Width (inches)	0.319 inch
Net weight	12.93 g		

**Temperatures**

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

**Material data**

Material	PA 66	UL 94 flammability rating	V-2
----------	-------	---------------------------	-----

**System specifications**

Version	Screw connection, Fuse cartridge, One end without connector	Number of levels	1
Number of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Rail	TS 35, TS 32

**Additional technical data**

Type of mounting	Snap-on
------------------	---------

**Conductors for clamping (rated connection)**

Number of connections	2	Type of connection	Screw connection
-----------------------	---	--------------------	------------------

**General**

Rail	TS 35, TS 32
------	--------------

**Rating data**

Rated cross-section	4 mm <sup>2</sup>	Rated voltage	60 V
Volume resistance according to IEC 60947-7-x	1 mΩ	Power loss in accordance with IEC 60947-7-x	1.02 W

**Classifications**

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ECLASS 9.0	27-14-11-16
ECLASS 9.1	27-14-11-16	ECLASS 10.0	27-14-11-16
ECLASS 11.0	27-14-11-16	ECLASS 12.0	27-14-11-16

**Approvals**

Approvals



ROHS Conform

Creation date September 18, 2022 4:36:54 AM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

**ASK1EN/SMT 10-60VUC BFI H+**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Downloads**

---

Approval/Certificate/Document of Conformity	<a href="#">EAC certificate</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>

---

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Terminal Blocks](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[00110420202](#) [00175550302](#) [8WA1011-1BH23](#) [8WA1011-1EF20](#) [91.040](#) [9123140000](#) [RBO 5-T-B-HEX](#) [1333564](#) [DP25-GY-ND](#) [1431306](#)  
[HSL-TB64-DIN](#) [90.070](#) [90.202](#) [912314](#) [260-301\\_NR](#) [2757571](#) [280-331](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#)  
[283-317](#) [283-607](#) [2948995](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#) [284-601](#) [2907033](#) [5542152](#)  
[35956](#) [USK 10](#) [102510](#) [5520682](#) [5607102](#) [EMH 25-ZE30](#) [591620-2](#) [UM 45-SEFE M.NUT BK](#) [1-591651-1](#) [8671050000](#) [264-706](#) [280-575](#)  
[281-664](#) [592814-1](#)