

SAIS-5/7**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly.

Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The screw connection can be used in a wide range of applications. With this technology the conductor, optionally with wire-end ferrules, can be plugged into connection elements and secured with a screw. It is the classic, cheapest form of connection technology that also supports multi-conductor connections.

General ordering data

Version	Field attachable connector, M12, pin, straight
Order No.	9456940000
Type	SAIS-5/7
GTIN (EAN)	4008 190304935
Qty.	1 pc(s).

SAIS-5/7

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 23 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1,
Imidazolidine-2-thione
96-45-7

Technical data customisable plug-in connectors

Cable diameter	4...6 mm (PG7)/ 6...8 mm (PG9)	Cable diameter, max.	6 mm
Cable diameter, min.	4 mm	Coding	A
Conductor cross-section, max.	0.75 mm ²	Conductor cross-section, min.	0.14 mm ²
Connection cross-section, max.	0.75 mm ²	Connection cross-section, min.	0.14 mm ²
Contact surface	CuSnZn	Contact surface	CuSnZn (5-pole) / gold plated (8-pole)
Housing main material	PA	Insulation strength	10 ⁸ Ω
Number of poles	5	Plugging cycles	≥ 50
Pollution severity	3	Protection degree	IP67
Rated current	4 A	Rated voltage	60 V
Rated voltage	250 V (4-pole) / 60 V (5-pole) / 30 V (8-pole)	Shield connection	No
Temperature range of housing	-40 ... +85 °C	Threaded ring material	Diecast zinc
Type of connection	Screw connection		

General Info

Connection 1	M12	Connection 2	Screw
Description of article	SAIS / SAIB	Housing main material	PA
Connection thread	M12	Contact surface	CuSnZn
Protection degree	IP67	Plugging cycles	≥ 50

Standards

Connector standard IEC 61076-2-101

Classifications

ETIM 6.0	EC002635	ETIM 7.0	EC002635
ETIM 8.0	EC002635	ECLASS 9.0	27-44-01-02
ECLASS 9.1	27-44-01-03	ECLASS 10.0	27-44-01-02
ECLASS 11.0	27-44-01-02		

Approvals

Approvals

ROHS Conform
UL File Number Search E307231

SAIS-5/7**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Downloads**

Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
User Documentation	Manual
Catalogues	Catalogues in PDF-format
Brochures	FL FIELDWIRING EN FL FIELDWIRING EN


SAIS-5/7

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Pole scheme

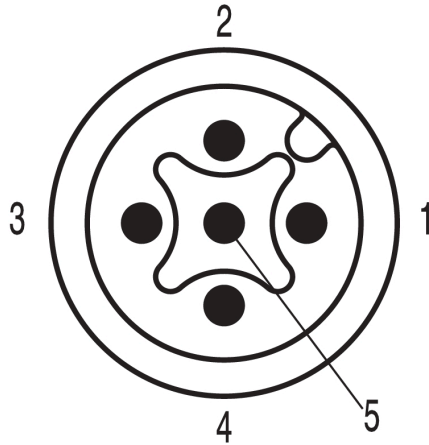

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[600X518037X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [8R5000A16M005](#) [1200910002](#) [1203580030](#) [1200910008](#) [1200910011](#) [1300140094](#)
[130203-0054](#) [1300140026](#) [1300150099](#) [RF-12S1N8A90DU](#) [1-3637-600-5205](#) [1612618](#) [21036836414](#) [8R4006A16M010](#) [8R5006A18A120](#)
[1604232](#) [1R3006A20M005](#) [RF-12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-40011](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00113](#) [43-](#)
[01088](#) [43-01203](#) [41-40013](#) [42-00008](#) [43-00343](#) [43-01032](#) [43-01162](#) [43-10000](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [8R4000A16M010](#) [6-22279-3](#) [1605332](#) [N03FA03144](#) [1300140077](#) [43-01338](#) [XS2RD4265](#) [RSC 4/9](#)
[XS2R-D426-1](#) [XS8A-0441](#)