

**FF 32 54/230V GY****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The filter fans combine a safe and profitable cabinet cooling due to their low energy consumption by maximum air flow. The fluted filter mat of the IP 55 version extends the service life by up to 300% in comparison to conventional filter mats.

**General ordering data**

Type	FF 32 54/230V GY
Order No.	<a href="#">2556680000</a>
Version	Filter fan, IP54, grey
GTIN (EAN)	4050118567304
Qty.	1 pc(s).

Creation date November 11, 2020 7:23:36 PM CET

Catalogue status 06.11.2020 / We reserve the right to make technical changes.

## FF 32 54/230V GY

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

## Dimensions and weights

Width	202 mm	Width (inches)	7.953 inch
Height	202 mm	Height (inches)	7.953 inch
Depth	93 mm	Depth (inches)	3.661 inch
Net weight	870 g		

## General data

Colour	grey		
Current consumption	Mains frequency	50 Hz	
	Current	0.12 A	
	Mains frequency	60 Hz	
	Current	0.18 A	
EMC version	No		
Filter class	G 4		
Fuse	6 A		
Height of installation cut-outs	177 mm		
MTBF	37,500 h		
Mounting depth	87 mm		
Mounting height	6 mm		
Noise emission	40 dB (A)		
Operating temperature range	-40...55 °C		
Power	Mains frequency	50 Hz	
	nominal	19 W	
	Mains frequency	60 Hz	
	nominal	18 W	
Protection class (UL)	Type 12		
Rated voltage (text)	230 V AC $\pm$ 10%		
Size	3		
Type of connection	Terminal strip		
Type of mounting	Snap-on		
UL 94 flammability rating	V-0		
Volume flow with exhaust filter	Mains frequency	50 Hz	
	Volume flow	73 m <sup>3</sup> /h	
	Exhaust filter	IP54	
	Mains frequency	60 Hz	
	Volume flow	80 m <sup>3</sup> /h	
	Exhaust filter	IP54	
Volume flow, free-blowing	Mains frequency	50 Hz	
	Volume flow	98 m <sup>3</sup> /h	
	Mains frequency	60 Hz	
	Volume flow	108 m <sup>3</sup> /h	
Width of installation cut-outs	177 mm		
With filter	Yes		

## Classifications

ETIM 6.0	EC000320	ETIM 7.0	EC000320
eClass 9.1	27-18-07-16	eClass 10.0	27-18-07-16

**Data sheet****FF 32 54/230V GY****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com**Technical data****Approvals**

Approvals



ROHS

Conform

**Downloads**Approval/Certificate/Document of  
Conformity[EU Declaration of Conformity](#)

Engineering Data

[STEP](#)

User Documentation

[Installation- and operating instructions](#)


**Data sheet**

**FF 32 54/230V GY**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Graph**

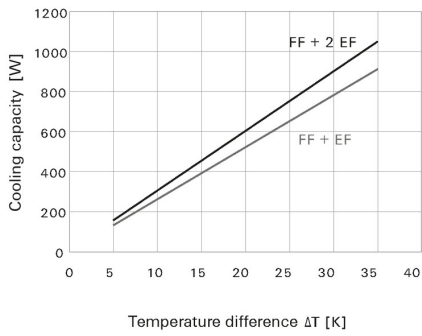

**Graph**

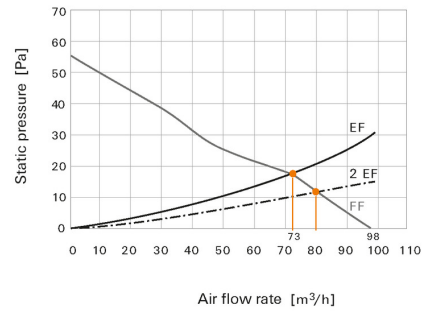

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [AC Fans](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[8850A](#) [A2D200-AA04-41](#) [A2E165-AA17-01](#) [AC430019H-012](#) [144LS-2282-010](#) [1500-FAN-01](#) [25.350.5253.0](#) [S2E250-AL06-70](#) [A2D210-AB10-05](#) [A2D240-AA02-02](#) [23241-3](#) [25.345.5353.0](#) [281DY-1LP14-000B](#) [344DY-1LP11-000](#) [39.703.0253.0](#) [USTF1203224VHW](#)  
[3915100996-SA3](#) [3G2C7MC224](#) [W2D200-HH04-07](#) [W2S130-AA03-43](#) [S2E250-BB13-22](#) [8856N](#) [A2E170-AF23-11](#) [W4S250-CA20-56](#)  
[W2S130-AB03-09](#) [5900](#) [C45-A7](#) [TAC12025230MT](#) [8550A](#) [8560N](#) [AD0405HB-G73\(9T\)](#) [CENT-2000-FFTM](#) [CENT-2000-RFTM](#) [W2D200-CA04-52](#) [W2S130-AB25-10](#) [A4E330-AB18-09](#) [W2E250-DB05-52](#) [W4E315-CS22-70](#) [W2E300-CP02-75](#) [S4S250-BA02-20](#) [S2D300-BP02-37](#) [W2S130-AB25-24](#) [W2D250-GA08-08](#) [A2E200-AH38-70](#) [TAC8025115HW](#) [F1238H24BT-FHR](#) [S2D300-CP02-34](#) [4118N/2H8PU-011](#)  
[RLF100-1114-060](#) [AD3512MB-G5B](#)