

HSS-HF 3/4 11.0-17.0/25Y


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

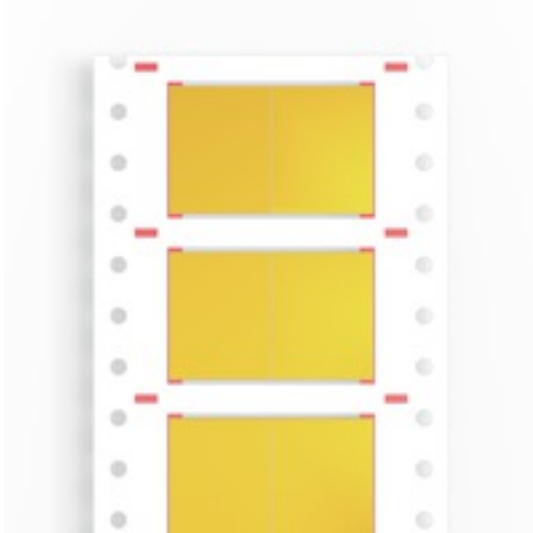

Similar to illustration



The heat-shrinkable sleeve is printable on 2 sides and can be used for marking and insulating cables and wires. The flexible, heat-shrink material enables a firm, perfect fit around the conductor and therefore saves space.

General ordering data

| | |
|--------------------|--|
| Version | Conductor and cable markers, 11 - 17 mm, 25.4 x 31.8 mm, yellow |
| Order No. | 1962020000 |
| Type | HSS-HF 3/4 11.0-17.0/25Y |
| GTIN (EAN) | 4032248642717 |
| Qty. | 2,500 pc(s). |
| compatible printer | 2599430000 2599440000 1140490000 |

Creation date January 25, 2021 11:58:30 AM CET

Catalogue status 15.01.2021 / We reserve the right to make technical changes.

HSS-HF 3/4 11.0-17.0/25Y

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|----------------|------------|-----------------|-----------|
| Depth | 0.77 mm | Depth (inches) | 0.03 inch |
| Height | 25.4 mm | Height (inches) | 1 inch |
| Net weight | 1.32 g | Width | 31.8 mm |
| Width (inches) | 1.252 inch | | |

Temperatures

| | |
|-----------------------------|--------------|
| Operating temperature range | -55...105 °C |
|-----------------------------|--------------|

General data

| | | | |
|-----------------------------------|--------------|--|----------------|
| Colour | yellow | Halogen | No |
| Material | Polyolefine | Material colour according to resistance code | 4 |
| Operating temperature range | -55...105 °C | Operating temperature range, max. | 105 °C |
| Operating temperature range, min. | -55 °C | Recommended industries | Transportation |
| Type of printing | neutral | Width | 31.8 mm |

Conductor and cable markers

| | | | |
|-----------------------------------|--------------------|----------------------------------|-------------------------|
| Conductor O.D. | 11 - 17 mm | Conductor O.D., max. | 17 mm |
| Conductor O.D., min. | 11 mm | Conductor cross-section, max. | 70 mm ² |
| Conductor cross-section, min. | 35 mm ² | Cross-section for connected wire | 35 - 70 mm ² |
| Halogen | No | Rate of shrinkage | 2:1 |
| Recommended shrinking temperature | 90 °C | Text field height | 30.54 mm |
| Text field width | 25.4 mm | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| ECLASS 9.0 | 27-40-04-01 | ECLASS 9.1 | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|---|---|
| Approval/Certificate/Document of Conformity | NFX 70-100-1 2006 + NF X 70-100-2 2006 BS EN 45545-2 2013+A1 2015 BS EN ISO 4589-2 1999 |
| Engineering Data | STEP |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |

Data sheet**HSS-HF 3/4 11.0-17.0/25Y****Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germanywww.weidmueller.com**Drawings**

Bestellhilfe

HSS-HF 1/8" 1,2-2,8 / 50 Y

- Y = Gelb (W=Weiß)
- 50,8 mm Hüslenlänge (oder 25,4 mm)
- geeigneter Leiterdurchmesser
1,2 - 2,8mm
- Max. Außendurchmesser
1/8" (bzw. 3,2 mm)
- HF = Halogenfrei nach VDE 0472-615
- HSS = Heat Shrinkable Sleeve
(wärmeschrumpfender Schlauch)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Labels & Markers](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[89078GBEST](#) [89082GBESR](#) [89082GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [586R734H02](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#) [CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#) [CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#) [CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)