

VT SF 3/12 MC NE RT V0


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

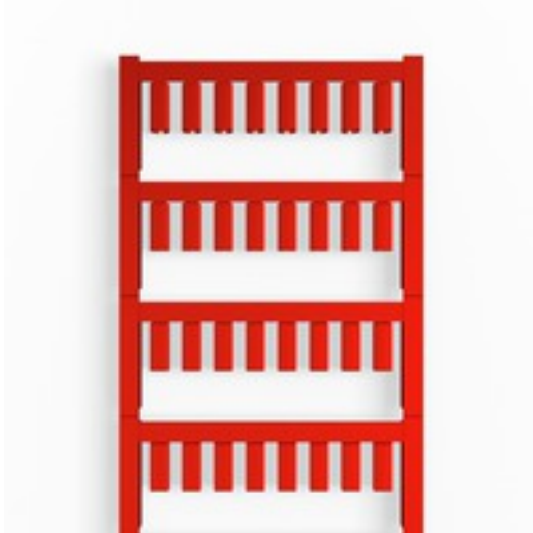

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

General ordering data

| | |
|---------------------|--|
| Version | SlimFix, Conductor and cable markers, 3 - 3.7 mm, 12 x 4.6 mm, red |
| Order No. | 1718490003 |
| Type | VT SF 3/12 MC NE RT V0 |
| GTIN (EAN) | 4008190349622 |
| Qty. | 640 pc(s). |
| compatible printer | 2438520000 2438510000 |
| Alternative product | 1919510000 |

VT SF 3/12 MC NE RT V0
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data
Dimensions and weights

| | | | |
|----------------|------------|-----------------|------------|
| Depth | 4.8 mm | Depth (inches) | 0.189 inch |
| Height | 12 mm | Height (inches) | 0.472 inch |
| Net weight | 0.302 g | Width | 4.6 mm |
| Width (inches) | 0.181 inch | | |

Temperatures

| | |
|-----------------------------|--------------|
| Operating temperature range | -50...120 °C |
|-----------------------------|--------------|

General data

| | | | |
|-----------------------------------|---|--|--------------|
| Colour | red | Halogen | No |
| Material | Polyamide 66 | Material colour according to resistance code | 2 |
| Number of markers per combination | 1 MultiCard = Conductor and cable markers | Operating temperature range | -50...120 °C |
| Operating temperature range, max. | 120 °C | Operating temperature range, min. | -50 °C |
| Recommended industries | Transportation, Machinery | Size of labelling field | 12 x 4.6 mm |
| Type of printing | neutral | UL 94 flammability rating | V-0 |
| Width | 4.6 mm | | |

Conductor and cable markers

| | | | |
|-------------------------------|---------------------|----------------------------------|---------------------------|
| Conductor O.D. | 3 - 3.7 mm | Conductor O.D., max. | 3.7 mm |
| Conductor O.D., min. | 3 mm | Conductor cross-section, max. | 2.5 mm ² |
| Conductor cross-section, min. | 1.5 mm ² | Cross-section for connected wire | 1.5 - 2.5 mm ² |
| Halogen | No | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| ECLASS 9.0 | 27-40-04-01 | ECLASS 9.1 | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|------------------|--|
| Engineering Data | STEP |
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |


Data sheet

VT SF 3/12 MC NE RT V0

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Labels & Markers](#) category:

Click to view products by [Weidmuller](#) manufacturer:

Other Similar products are found below :

[89078GBEST](#) [89082GBESR](#) [89082GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [586R734H02](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#) [CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#) [CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#) [CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)