

## VT SF 5/21 MC NE GE V0


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

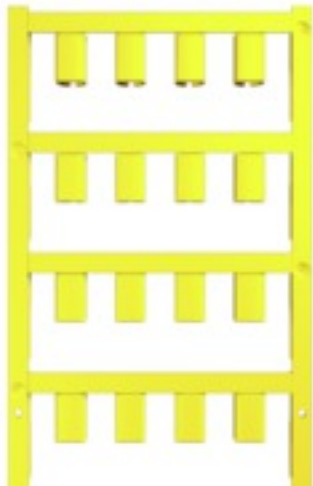

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

### Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

### General ordering data

Version	SlimFix, Conductor and cable markers, 4.8 - 7.4 mm, 21 x 7.4 mm, yellow
Order No.	<a href="#">1689470004</a>
Type	VT SF 5/21 MC NE GE V0
GTIN (EAN)	4008190872601
Qty.	160 pc(s).
compatible printer	<a href="#">2438520000</a> <a href="#">2438510000</a>

**VT SF 5/21 MC NE GE V0**
**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**
**Dimensions and weights**

Depth	8 mm	Depth (inches)	0.315 inch
Height	21 mm	Height (inches)	0.827 inch
Net weight	0.7 g	Width	7.4 mm
Width (inches)	0.291 inch		

**Temperatures**

Operating temperature range	-50...120 °C
-----------------------------	--------------

**General data**

Colour	yellow	Halogen	No
Material	Polyamide 66	Number of markers per combination	1 MultiCard = Conductor and cable markers
Operating temperature range	-50...120 °C	Operating temperature range, max.	120 °C
Operating temperature range, min.	-50 °C	Recommended industries	Transportation, Machinery
Size of labelling field	21 x 7.4 mm	Type of printing	neutral
UL 94 flammability rating	V-0	Width	7.4 mm

**Conductor and cable markers**

Conductor O.D.	4.8 - 7.4 mm	Conductor O.D., max.	7.4 mm
Conductor O.D., min.	4.8 mm	Conductor cross-section, max.	10 mm <sup>2</sup>
Conductor cross-section, min.	6 mm <sup>2</sup>	Cross-section for connected wire	6 - 10 mm <sup>2</sup>
Halogen	No		

**Classifications**

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02

**Approvals**

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>


**Data sheet**

**VT SF 5/21 MC NE GE V0**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Labels & Markers](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[89078GBEST](#) [89082GBESR](#) [89082GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [586R734H02](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#) [CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#) [CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#) [CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)