

## VT SF 6/21 MC NE RT V0


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

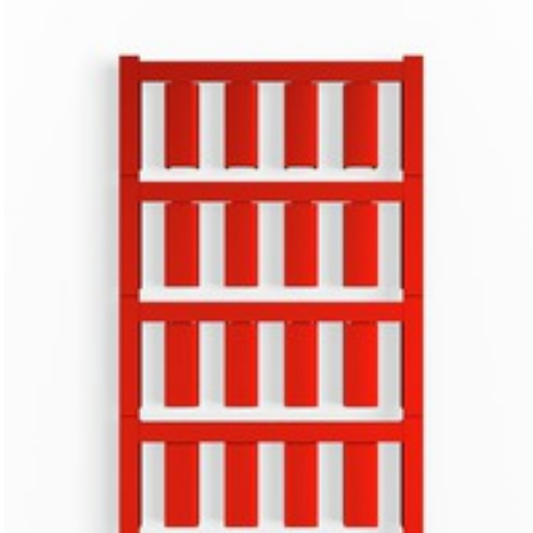

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

### Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

### General ordering data

|                    |                                                                      |
|--------------------|----------------------------------------------------------------------|
| Version            | SlimFix, Conductor and cable markers, 5.8 - 7.8 mm, 21 x 8.4 mm, red |
| Order No.          | <a href="#">1730560003</a>                                           |
| Type               | VT SF 6/21 MC NE RT V0                                               |
| GTIN (EAN)         | 4008190954635                                                        |
| Qty.               | 160 pc(s).                                                           |
| compatible printer | <a href="#">2438520000</a> <a href="#">2438510000</a>                |

## VT SF 6/21 MC NE RT V0

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                |            |                 |            |
|----------------|------------|-----------------|------------|
| Depth          | 8.5 mm     | Depth (inches)  | 0.335 inch |
| Height         | 21 mm      | Height (inches) | 0.827 inch |
| Net weight     | 1.006 g    | Width           | 8.4 mm     |
| Width (inches) | 0.331 inch |                 |            |

## Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -50...120 °C |
|-----------------------------|--------------|

## General data

|                                   |              |                                   |                                           |
|-----------------------------------|--------------|-----------------------------------|-------------------------------------------|
| Colour                            | red          | Halogen                           | No                                        |
| Material                          | Polyamide 66 | Number of markers per combination | 1 MultiCard = Conductor and cable markers |
| Operating temperature range       | -50...120 °C | Operating temperature range, max. | 120 °C                                    |
| Operating temperature range, min. | -50 °C       | Recommended industries            | Transportation, Machinery                 |
| Size of labelling field           | 21 x 8.4 mm  | Type of printing                  | neutral                                   |
| UL 94 flammability rating         | V-0          | Width                             | 8.4 mm                                    |

## Conductor and cable markers

|                               |                    |                                  |                         |
|-------------------------------|--------------------|----------------------------------|-------------------------|
| Conductor O.D.                | 5.8 - 7.8 mm       | Conductor O.D., max.             | 7.8 mm                  |
| Conductor O.D., min.          | 5.8 mm             | Conductor cross-section, max.    | 16 mm <sup>2</sup>      |
| Conductor cross-section, min. | 10 mm <sup>2</sup> | Cross-section for connected wire | 10 - 16 mm <sup>2</sup> |
| Halogen                       | No                 |                                  |                         |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0    | EC001530    |
| ECLASS 9.0  | 27-40-04-01 | ECLASS 9.1  | 27-40-04-01 |
| ECLASS 10.0 | 27-40-04-01 | ECLASS 11.0 | 27-28-11-02 |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                          |
|------------------|------------------------------------------|
| Engineering Data | <a href="#">STEP</a>                     |
| Engineering Data | <a href="#">EPLAN, WSCAD, Zuken E3.S</a> |


**Data sheet**

**VT SF 6/21 MC NE RT V0**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Labels & Markers](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[89078GBEST](#) [89082GBESR](#) [89082GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [586R734H02](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#) [CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#) [CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#) [CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)