

**WIL-LWXXXX-6500D024-145SXX5.0BXXXXXXXXXX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The WIL-LED lights Family: Only 8mm (9.4mm with magnet) high LED lamp for 24V DC with very high luminous efficacy and high lifespan (greater 60 000h). Very robust construction, by full potting and metal housing - waterproof (IP67). Due to its 6500K light color (daylight) suitable for the various applications. Optionally easily connectable with M12 connection. Due to the low power consumption, a small enough power supply with 24V for operation.

**General ordering data**

Type	WIL- LWXXXX-6500D024-145SXX5.0BXXXXXXXXXX
Order No.	<a href="#">2535800000</a>
GTIN (EAN)	4050118547467
Qty.	1 pc(s).

WIL-LWXXXX-6500D024-145SXX5.0BXXXXXXXXXX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Width	145 mm	Width (inches)	5.709 inch
Height	8 mm	Height (inches)	0.315 inch
Depth	40 mm	Depth (inches)	1.575 inch
Net weight	100 g		

### Temperatures

Operating temperature, max.	60 °C	Operating temperature, min.	-20 °C
Operating temperature	-20 - 60°C		

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

### Cable technical specifications

Cable Material	PUR	Sheathing colour	black
Housing main material	hard anodised aluminium	Cable length	5 m
Core cross-section	0.34 mm <sup>2</sup>		

### Connection data

Version	Cable end open	Connection thread	without
Wiring	Brown +, Blue -		

### Electric data

Rated voltage (text)	24 V DC	Rated current	0,20 A
Power	5.04 W	Dimmable	Yes

### General technical data

Number of LEDs	21	Light colour (CCT)	6500K, White
Luminosity	3,470 cd	Light current	340 lm
Emitting angle	40 °	Illumination level	118 lux
Operating life	60.000 h	Type of mounting	Screw mounting
Drill hole spacing	130 mm	Impact resistance	IK05
Protection degree	IP67		

### Material data

Housing main material	hard anodised aluminium	Encapsulation compound	PUR V0
Material of end caps	Diecast zinc, nickel-plated		

### Standards

Certificate no. (cULus)	E354496
-------------------------	---------

### Classifications

ETIM 6.0	EC001959	ETIM 7.0	EC001959
eClass 9.0	27-11-06-40	eClass 9.1	27-11-06-40
eClass 10.0	27-11-06-40		

Creation date November 13, 2020 2:02:56 PM CET

Catalogue status 06.11.2020 / We reserve the right to make technical changes.

**Data sheet**

**WIL-LWXXXX-6500D024-145SXX5.0BXXXXXXXXXX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**Approvals**

Approvals



ROHS

Conform

**Downloads**

Engineering Data

[STEP](#)


**Data sheet**

**WIL-LWXXXX-6500D024-145SXX5.0BXXXXXXXXXX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Dimensioned drawing**

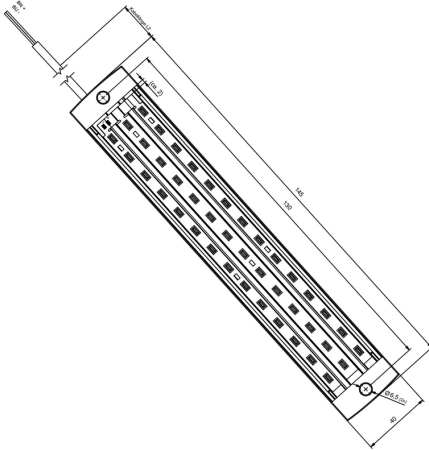

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Racks & Rack Cabinet Accessories](#) category:*

*Click to view products by [Weidmuller](#) manufacturer:*

Other Similar products are found below :

[M00-PLN](#) [F2424](#) [8351-832-A-24](#) [9104](#) [9105](#) [PLFF2000](#) [H-9163-B](#) [1427C3](#) [NL101](#) [HTS10](#) [PC-79](#) [SC10-3A](#) [SC4-28](#) [CG3-340S/12](#) [CP-001BK](#) [M6123-4007-SS](#) [TS170](#) [LP40](#) [5261304-07](#) [CG3-160G](#) [7112C-PLN](#) [ALUM](#) [CM10](#) [8610-3124-S-26](#) [TS81](#) [7142](#) [GP134](#) [M6125-4007-A-24](#) [M6127-4007-SS](#) [PBCOVER](#) [512](#) [AEG-4000G](#) [AEG-3000G](#) [HD99](#) [SR2-66A2](#) [FP10B4HP-1](#) [FP52-2](#) [1406-1006-01](#) [29478](#) [TS2535](#) [TS169-6](#) [CAC2](#) [HA19-3U](#) [BR-19-10-1](#) [TS180](#) [CG3-ESD](#) [SC11-1](#) [CFS-1.00/2.20](#) [HEC0800PB](#) [ZC633R](#) [140PLN](#)