




● SP13/SP17/SP21 IP68 Threaded coupling

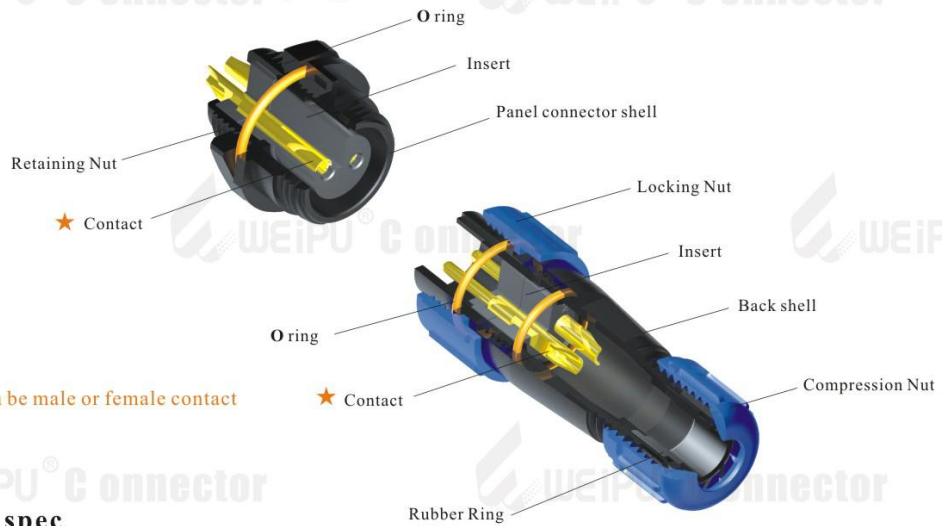

★ Each side can be male or female contact

Material and spec

Product type	Connector	Overmolded Cable Assemblies
Coupling	Threaded coupling	Threaded coupling
Shell material	Nylon66, fire resistance: V-0	PC, PVC, fire resistance: V-0; Locking nut material: Anodized aluminum
Insert material	PPS max temperature 260 °C, fire resistance: V-0	PPS max temperature 260 °C, fire resistance: V-0
Contact material	Brass with gold plating	Brass with gold plating
Termination	SP13: solder, SP17: solder/crimp, SP21: solder / screw/crimp	
Cable outer diameter range	SP13 I: 4-6.5mm SP13 II: 5-8mm SP17: 6-10mm SP21 I: 4.5-7mm SP21 II: 7-12mm	
IP rating	IP68	IP66
Mating cycle	>500	>500
Temperature range	-25°C~+85°C	-20°C~+85°C
Insulation resistance MΩ	2000	2000

SP13 Series IP68

**SP
13**


Cable connector

Mate with SP1311, SP1312



SP1310/P

SP1310/S



C: with cap, N: without cap
Cable outer diameter: I: 4-6.5mm, II: 5-8mm
Number of contact: 2, 3, 4, 5, 6, 7, 9



In-line cable connector

Mate with SP1310



SP1311/P

SP1311/S






Front mount

Mate with SP1310



SP1312/P

SP1312/S



C: with cap, N: without cap
Number of contact: 2, 3, 4, 5, 6, 7, 9

Contact arrangement and spec for solder termination

Number of contact	2	3	4	5	6	7	9
Male contact face view							
Rated current (A)	13A	13A	5A	5A	5A	5A	3A
Contact diameter	∅ 1.6X2	∅ 1.6X3	∅ 1X4	∅ 1X5	∅ 1X6	∅ 1X7	∅ 0.7X9
Rated voltage (AC.V)	250V	250V	200V	180V	125V	125V	125V
Test voltage(AC.V) 1 min	1500V	1500V	1500V	1000V	1000V	1000V	1000V
Contact resistance mΩ	2	2	5	5	5	5	10
Wire size mm ² /AWG	≤2/14	≤2/14	≤0.785/18	≤0.785/18	≤0.785/18	≤0.785/18	≤0.785/18

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Push Pull Connectors](#) category:

Click to view products by [Weipu](#) manufacturer:

Other Similar products are found below :

[6407-249V-11273P](#) [6408-201V-13273](#) [6408-202V-17343](#) [FAG.2B.319.CYC](#) [FLS.01.250.DLAE24](#) [ABF.1S.250.NTA](#) [1332M107MS](#)
[1589430-2](#) [ERA.01.250.DLL](#) [HVP.03.250.CLLPV](#) [CAJ.M34.SLL.C72GZ](#) [FLC.00.250.CTAC27](#) [FLC.00.250.CTAC31](#) [FPG.0B.305.CLAD52](#)
[PXG.M0.8GG.NG](#) [BRR.3S.200.PZVG](#) [ECG.00.304.CLL](#) [ECP.0S.304.CLN](#) [EGA.00.303.CLL](#) [6408-201V-11273](#) [6408-201V-11343](#) [6408-](#)
[202V-25273](#) [PAC.M0.4NL.AC52J](#) [980-0009-471](#) [NCG044SC2DC006](#) [GMA.4B.013.DN](#) [1331E103MZ](#) [1332EV212FZ](#)
[FPG.00.304.CLAD35Z](#) [PKG.220.UJ](#) [342491](#) [331294](#) [ERA.4S.434.CJL](#) [342372](#) [330210](#) [330224](#) [PKG.M0.6NL.LZ](#) [PCA.1S.303.ZLLT](#)
[FHG.00.305.CLAD35](#) [FGU.1M.308.XLCT](#) [CNB.M19.GLLV](#) [39050630713002](#) [QPD C 4PE6 0 2X12-20 BK](#) [1331-P-103-MZ](#) [1332E319FZ](#)
[308829](#) [POB.186.GN](#) [FFM.00.131.LC](#) [342379](#) [320847](#)