



Feature -

small dimension max. 8 positions

Application -

high value toy

power strip voltage selector selection key on the application


AV machine, video recorder, air cleaner

SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	1POLE , 2 POSITION~8 POSITION (STOP LESS) are Available
CONTACT RATING	0.5A 24V DC ; 0.2A 48V DC
CONTACT RESISTANCE	2 Ω MAX. 1.5 V DC; 100 mA, by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	400 ± 250 gf.cm 230 ± 100 gf.cm
OPERATING LIFE	2,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C


■ Physical and electrical information of LED will be provided upon customer's request on switches.

► HOW TO ORDER

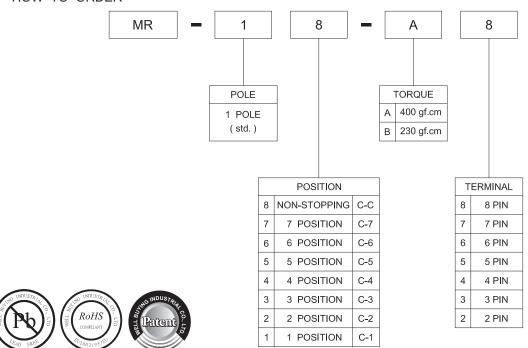

TEL: 886-2-88098288 FAX: 886-2-88098289 E-mail: wellbuyg@ms24.hinet.net http://www.wellbuying.com.tw **P.161**



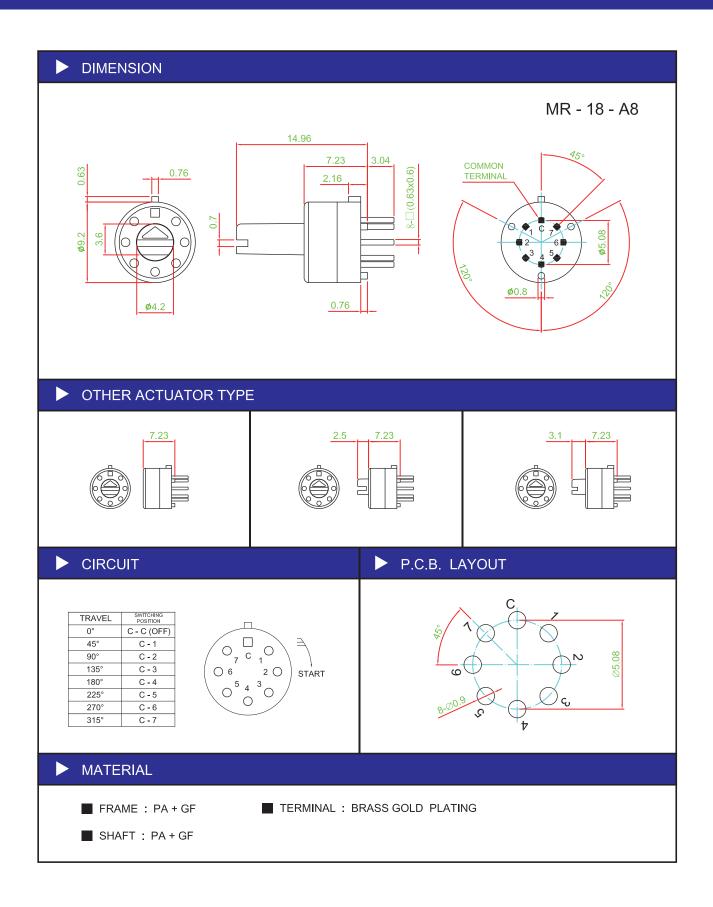

P.162 TEL: 886-2-88098288 FAX: 886-2-88098289 E-mail: wellbuyg@ms24.hinet.net http://www.wellbuying.com.tw

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rotary Switches category:

Click to view products by Well Buying manufacturer:

Other Similar products are found below:

57HS22-02-2-06N 57M22-02B16N 57M22-09A16N M3786/4-0881 M3786/4-3267 M3786/4-5568 M3786/4-6029 71ESF30-05204N MC06L1NCGF 84986-26 9003K2C003GA PLR3251 PLR3262 PS3 A0142M2SP A019605 A029303 R2AA4455NNNN R2BB4455NNNN DR75-AMSF-10R-B 14-520.0360 1703.3201 HW1MS-0202-101 24002-03S A029101 ACSNO-129-YB-C1014 ACSNO-134-RR-YB-C1005 ACSNO-353-SB-C3016 1825537-4 T505 T505E 24005-03N H10207RR01Q M3786/4-0002 M3786/4-0630 M3786/4-1028L M3786/4-1233L M3786/4-3044 M3786/4-3129 M3786/4-5008L M3786/4-5256 MC6CX1A502X009 42HS36-01-1-06N 42P36-03B10S 44MBS60-04-2-03N 44MG90-02-1-02N 50KMT90-01-2-02N 51A22-01-1-16S 51CDP30-01PAJN 51KSP30-01D04N