

Feature:

6A, 30VDC for power SPST, lock / non-lock function

Application:


Home electronic equipments
Industrial electronic equipments

Audio system

ADSL modem; Wireless AP





SWITCH SPECIFICATIONS	
POLE - POSITION	1P1T
CONTACT RATING	30 V DC , 6 A ; 30 V DC , 2 A
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 100 mA , by method of voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not allowable ; 500 V AC for 1 minute
OPERATING FORCE	300 ± 150 gf
OPERATING LIFE	6,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.8 ± 0.3 mm

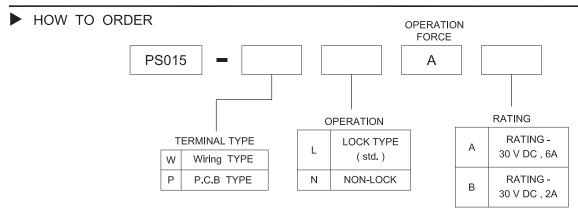

DIMENSION

PS015-PLAA







CIRCUIT

2







X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by Well Buying manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBNANGA A22NZMPATRA A2PMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7310 A3A-7340 A3U-TMW-A2C-5M A595 12037A2ULCSA ABD122N-B 1211390004