Feature:

Compact size

Reflow soldering available

Application:


Consumer products Computer products Instrumentation

Communication equipments

Hand-held devices

2.0 ± 0.2 mm


SWITCH SPECIFICATIONS	
POLE - POSITION	3P2T , SMT TYPE
CONTACT RATING	6 V DC , 0.3 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC; 100 mA, by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	200 ± 150gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C





DIMENSION

TOTAL TRAVEL


SS001-S32NAPA

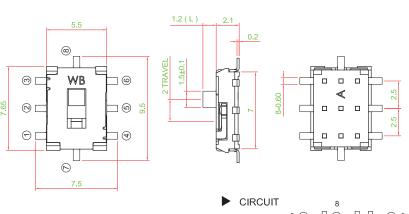





P.C.B. LAYOUT







X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by Well Buying manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHS133K MHSS1104A MMD GH49S010001 MSS12A EPS1PC1 1825074-1 1825160-3 1825167-2 1825289-7 K232CB 25139NLDB 25449NAH SLB1240R45 1825078-1 1825080-4 1825269-1 1825270-2 STS141RA04 T2215BEN506 GH46P000001 GH46W000001 GH49P010001 25339NA M42A TG36P000000 TG36P000050 AYZ0202AG 47227LFE 49331L 50208L L203091MS02Q 4-1437581-7 X2225CR-437W 49329L 1101M1S3ZB8E2 1-1437581-1 MSS2225G04 TG39W000000 1825075-1 MSS42G TG36WS80065 T105S1CWZBE SLB124145 SLB1280R5 SLB1340R45 25136NLDB