
L-Keys for Hexagon Socket Screws



- Solution to the extraneous rust problem: fasten stainless screws with stainless tools
- Hex-Plus allows socket head screws to live longer
- Stainless L-keys prevent extraneous rust on stainless screws
- With Take it easy tool finder: colour coding by size
- Wear-resistant clip material for enhanced durability

High quality L-keys out of stainless steel for hexagonal socket screws by Wera. Stainless steel prevents the transfer of extraneous rust. The Hex-Plus profile offers a greater contact surface in the head of the screw. The notching effect is therefore reduced to a minimum and damage to the screw head more or less eliminated. Come with hex ballpoint on the long arm: the ballpoint drive profile means that it is possible to swivel the tool axis away from the screwdriving axis, thus enabling "round the corner" screwdriving. "Take it easy" Tool Finder: colour coding according to size. In an almost wear-free L-key clip fastener.



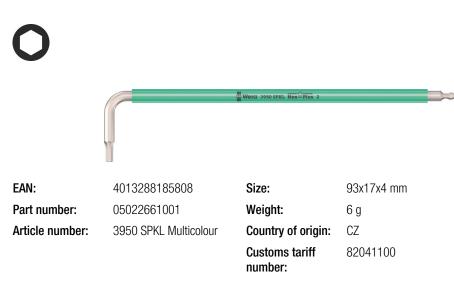







L-Keys for Hexagon Socket Screws



Stainless L-keys





Stainless L-keys are hardened to the same strength as conventional (carbon) steel tools, and prevent extraenous rust forming.

Vacuum ice-hardened



The stainless steel tools from Wera are vacuum ice-hardened and have the hardness and strength needed for screw connections. There are no limitations to the industrial applications they are suitable for.

L-keys with a thermoplastic sleeve



L-keys with a thermoplastic sleeve are manufactured out of easy-togrip, circular material. The sleeve ensures that work is safe and comfortable even at low temperatures. High corrosion protection features thanks to the special BlackLaser surface treatment. Colour coding and large stamp to enable the desired L-key to be easily located.

Hex-Plus



Hexagon screws can endure a problem because the contact surfaces delivering the power from the conventional tool. is transferred to the screw via very small surface areas. The consequence: the screw can become damaged (rounding out). Hex-Plus tools have a greater contact surface that prevents this from happening! At the same time, as much as 20 % more torque can be applied. Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

Ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-the-corner" screwdriving jobs.

Take it easy tool finder system



Take it easy tool finder system with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets). L-Keys for Hexagon Socket Screws



Further versions in this product family:

	O mm	L ↓ mm	mm	inch	inch
05022660001	1.5	90	14	3 1/2	9/16
05022661001	2.0	101	16	4	5/8
05022662001	2.5	112	19	4 7/16	3/4
05022663001	3.0	123	21	4 7/8	27/32
05022664001	4.0	137	24	5 3/8	1
05022665001	5.0	154	27	6 1/16	1 1/16
05022666001	6.0	172	31	6 3/4	1 1/4
05022667001	8.0	195	37	7 11/16	1 7/16
05022668001	10.0	224	42	9	1 11/16

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Tool Kits & Cases category:

Click to view products by Wera manufacturer:

Other Similar products are found below :

 217434-1
 4263
 1055420-1
 11-18-3023
 63860-8170
 856600-2
 690372163
 11-40-3247
 63883-2870
 63885-0270
 63901-5670
 63866-1070

 63863-5070
 63892-7370
 11-18-3209
 63860-4070
 63881-0970
 A0403641
 11-18-3040
 63865-2070
 63910-1470
 63861-5070
 63850-7470

 11-18-3201
 63910-7570
 FM 0501
 146
 63883-0670
 63830-0070
 63902-9170
 11-18-3147
 11-18-3079
 63883-2670
 63900-1770
 11-18-3190

 63851-1070
 63912-4770
 63911-5270
 63895-1070
 63860-1470
 63850-6070
 1-69411-3
 63852-9270
 63802-6270
 63902-4870
 11-18-3202

 63852-9170
 63850-1070
 63830-0170
 63910-2870
 11-18-3010
 63852-9270
 63802-6270
 63902-4870
 11-18-3202