
**Bits for Square Socket Screws** 



- Suitable for square socket screws
- Ductile and tough for hard materials
- BiTorsion zone to absorb peak loads
- 1/2" square socket drive
- Take it easy tool finder: colour coding according to profile and size

BiTorsion bits for square socket screws with elastic Torsion zone - where kinetic energy is diverted from peak loads - and softer BiTorsion zone to prevent the bit tip from twisting under peak loads. This greatly extends the product service life. This provides the best possible durability together with the matching holder. Tough viscous for universal use. <sup>1</sup>/<sub>4</sub>" hexagon, suitable for holders as per DIN ISO 1173-F 6.3.



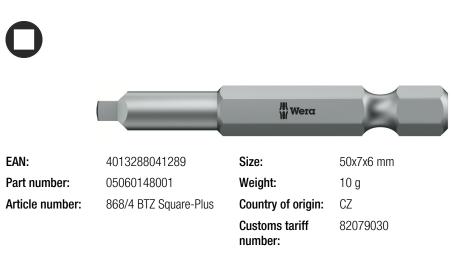

**Bits for Square Socket Screws** 

# **BiTorsion Bits**

Two cushioning torsion zones

### **BiTorsion phase 1**


# **BiTorsion phase 2**




Peak forces that occur in power tool applications often result in premature wear of bits or damage to the screw head. This usually occurs during initial power-up and the when the screw comes to a standstill. Screwdriving could become more productive and safer if these peak loads could be minimised. The Wera BiTorsion system prevents premature wear. The service life of the tool is extended and the productivity of applications power tool significantly increased.



The effectiveness of the BiTorsion system comes from a combination of two shock-absorbing spring elements. Both bits as well as holders have a cushioning torsion zone that diverts the kinetic energy away from the drive tip during peak loads.




The torsion spring integrated into unique BiTorsion holder the absorbs lower levels of peak loads (Phase 1). Any overloading of this spring is effectively prevented by means of а supporting mechanism.



Higher peak loads are minimised through the torsion effect of the bit shaft (Phase 2). This effect is achieved with a specific heat treatment after the hardening process of the bits. This reduces the hardness of the shaft in comparison to the drive tip.

### Above-average service life



Even the service life of conventional bits is enhanced with the use of the BiTorsion holder and the BiTorsion bit also functions in a normal holder.

# Prevents premature wear



The optimally coordinated features of the torsion zones on the bit and holder permit a phased yield when under strain. The two-phase system prevents premature wear. Moreover, a long tool service life is also ensured by the hardness of the bits that matches the respective application.

### **BiTorsion and conventional** tools



The BiTorsion holder and the BiTorsion bit can, of course, be used independently of one another.

**Bits for Square Socket Screws** 



Further versions in this product family:

	Ο	↓ v		Ø
		mm	inch	mm
05060147001	#1	50	2	4.2
05060148001	#2	50	2	4.2
05060149001	#3	50	2	5.5

Web link https://products.wera.de/en/bits\_holders\_adaptors\_the\_range\_of\_bits\_bits\_for\_square\_socket\_screws\_868\_4\_btz\_square-plus.html

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Screwdrivers, Nut Drivers & Socket Drivers category:

Click to view products by Wera manufacturer:

Other Similar products are found below :

 272012M
 27850
 CE-16-03400-00-HNDLE-TORQ
 323451-000
 HMM-HH
 WUVT-1-120AC-P
 00-8987-YWPP
 32024
 XW4Z-00B

 49-22-4073
 96025
 96030
 96560
 96430
 31830
 92270
 96012
 96436
 96536
 92064
 72820
 96520
 92040
 96416
 96570
 72823
 96525
 96720

 31832
 92020
 96523
 96510
 96427
 92073
 92052
 72905
 72741
 72663
 32061
 30751
 130203/TA
 KLEIN TOOLS SCREWDRIVER 4-IN-1

 612020B
 35-045
 6951
 83
 9058
 9977
 EMF
 PTE6