Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm, $9x12 \times 10.0 \text{ Nm} \times 10-50 \text{ Nm}$

Click-Torque pre-set adjustable torque wrenches for insert tools







EAN: 4013288206176 **Size:** 290x50x50 mm

Part number:05075671001Weight:448 gArticle number:Click-Torque XP 2Country of origin:TW

Customs tariff 82041100

number:

- Pre-set click torque wrench in unmistakable Wera design
- Audible and tactile release mechanism when the set torque value is reached
- Pre-set torque values can be changed within the metered range in the test laboratory
- Measuring range: 10-50 Nm; Precise to +/- 2% as per DIN EN ISO 6789-1:2017-07
- With square socket (9x12 mm) for interchangeable plug-in tools; clockwise and anti-clockwise torque-control

Torque wrench with pre-set torque value for all applications where the same torque and repeat accuracy is required. The torque value can be changed within the metered range. The robust release mechanism guarantees a clearly audible and tactile trigger signal when the set torque value is reached. Square socket for interchangeable plug-in tools for clockwise and anti-clockwise torque-control. A presetting which deviates from this value to a desired torque value within the specified metered range is possible on request.

Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm, $9x12 \times 10.0 \text{ Nm} \times 10-50 \text{ Nm}$

Click-Torque pre-set adjustable torque wrenches for insert tools



Click-Torque Wrench series



We wanted working with torque wrenches to be simple and accurate which is why we developed the Click-Torque wrenches. With the ability to set and save the default values and with the unmistakable, robust Wera design, these torque wrenches are the ideal tools for all bolting applications that require torque-controlled tightening (clockwise torque wrenches) and tightening and loosening (torque wrenches for insert tools).

Drive 9x12 mm



For 9x12 mm interchangeable insert tools.

Exact



Precise to \pm 2% as per DIN EN ISO 6789-1:2017-07.

Release mechanism



When the set torque value is reached, an audible and tactile mechanism triggers.

For right and left direction

Click-Torque

wrenches are provided with pre-

set torque values. These tools are

ideal for all applications where the

same torque and repeat accuracy

torque

The

is required.



The Click-Torque wrenches for insert tools are suitable for right-hand and left-hand uses.

Robust models



Very robust design with ergonomic 2-component handle.

Individual pre-setting



The Click-Torque XP torque wrenches with a pre-set torque value can be set to any value within the specified metered range in the test laboratory.

Web link


https://products.wera.de/en/torque_tools_series_click-torque_wrenches_click-torque_pre-set_adjustable_torque_wrenches_for_insert_tools_click-torque_xp_2.html

Click-Torque XP 2 pre-set adjustable torque wrench for insert tools, 10-50 Nm, 10 Nm, $9x12 \times 10.0$ Nm $\times 10-50$ Nm

Click-Torque pre-set adjustable torque wrenches for insert tools



Further versions in this product family:

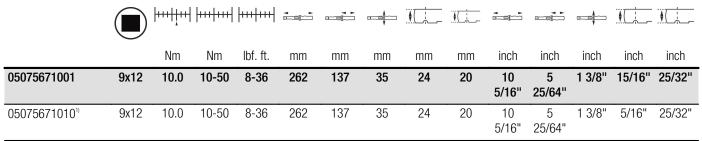

¹⁾ Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Spanners category:

Click to view products by Wera manufacturer:

Other Similar products are found below:

74005 74008 1406504-3 1406504-4 1406504-5 1406504-7 1725859-2 9965 999-16625-001 G70515-18 1055265-1 1055267-1 1-1406504-0 1055787-1 DCH.91.251.PA TG70-18 TG70 G62748-11 DPH.99.005.2K DCP.91.045.TN 1055512-1 1055276-1 R282303020 TA-0456 DCA.91.149.0TN TA-0436 TA-0398 TOL-222901 74_Z-0-0-193 294GB-5069-17-N 74_Z-0-0-2 523200-4 294GB-5070-25-A 74_Z-0-0-79 294GB-5070-17-A 74_Z-0-0-321 TOL-171801 PR23350 1490262-2 9968 AC24VS 80117 DCN.91.149.0TK BT-A-6010CAGE R282340000 BT-BS-609WT BT-A-6000B R282303000 BT-BS-610R BT-BS-610RT