


**Insulated Long Nose Pliers**

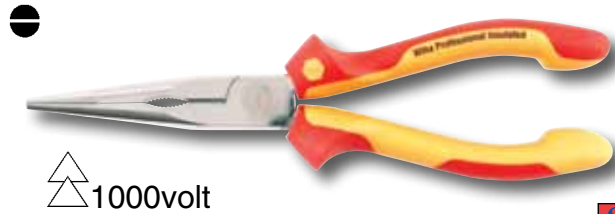

**SHOP**

**328 Long Nose Pliers With Cutters.** Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-01, NFPA70E & CSA,  $\Delta$  up to 1000 Volt. Individually Tested. Drop-forged from C70 special tool steel, cutters additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished, ergonomic comfort grip with slip guard, half-round jaws, serrated gripping surface.

Item	↔	↔	Cutting Capacity		↔	↔
No.	mm	Inch	Copper AWG	Pkg.	lbs.	
32806	160	6.3	#10	1	.32	
32808	200	8.0	#8	1	.42	

**Insulated Bent Nose Pliers**

Angled 40°



**SHOP**

**328 Bent Nose Pliers With Cutters.** Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-01, NFPA70E and CSA,  $\Delta$  up to 1000 Volt. Individually Tested.

Drop-forged from C70 special tool steel, cutters additionally induction hardened to approx. 64HRC, chrome-nickel plated, mirror-polished. Ergonomic comfort grip with slip guard. Half-round jaws, serrated gripping surface, nose bent 40°.

Item	↔	↔	Cutting Capacity		↔	↔
No.	mm	Inch	Copper AWG	Pkg.	lbs.	
32804	200	8.0	#8	1	.43	
32807	160	6.3	#10	1	.32	

**Round Nose Pliers**



**SHOP**

**32870 Round Nose Pliers.** Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-01, NFPA70E and CSA,  $\Delta$  up to 1000 Volt. Individually Tested. Drop-forged from C70 special tool steel, individually induction hardened, chrome and nickel plated, mirror-polished. Ergonomic comfort grip with slip guard. Serrated jaws.

Item	↔	↔	Pkg.	lbs.
No.	mm	Inch		
32870	160	6.3	1	.34

**Insulated Long Flat Nose Pliers**



**SHOP**

**32810 Long Flat Nose Pliers.** Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-01, NFPA70E and CSA,  $\Delta$  up to 1000 Volt. Individually Tested. DIN ISO 5745 Extra long head. Serrated Jaws are induction hardened. Special C70 tool steel forgings, Chrome finish. Two component Soft Grip handles. Use for Gripping and right-angle bending of wires and sheet metal parts.

Item	↔	↔	Pkg.	lbs.
No.	mm	Inch		
32810	160	6.3	1	.39

**Wiha Insulated Ratcheting Cable Cutters**



**Insulation:** VDE, EN/IEC, ASTM, NFPA70E, CSA & OSHA  
Tested to 10,000 volts with 1000 volts safety rating



$\Delta$  1000Volt

**SHOP**



**Insulation:** VDE, EN/IEC, ASTM, NFPA70E and CSA, 1000 Volt. Individually Tested.

**SHOP**

$\Delta$  1000Volt

**119 High Voltage Double-Insulated Ratcheting Cable Cutters**  
High leverage ratchet cable cutter with shear type blades cuts stranded and flexible copper and aluminum cable. Not for use on steel. Features built in safety release in all cutting positions, and high-visibility comfort grip handles.

Item	OAL	OAL	up to	Inch	↔	↔
No.	mm	Inch	MCM	Dia.	Capacity	lbs. pkg.
11960	250	10.0"	500	1.25"	32ml	1.58 1
11975	280	11.0"	750	2.0"	52ml	2.02 1

**11980 Insulated ACSR Ratcheting Cable Cutter**

Replaceable tool steel cutting blades are securely mounted for accurate cutting. Handles lock in closed position for easier storage. High leverage ratchet mechanism for best cutting performance.

Item	OAL	OAL	up to	Inch	↔	↔
No.	mm	Inch	MCM	Dia.	Capacity	lbs. pkg.
11980	353	13.9	477	1.25"	32ml	3.42 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pliers & Tweezers](#) category:*

*Click to view products by [Wiha](#) manufacturer:*

Other Similar products are found below :

[0031](#) [32750](#) [PN-5050/38D](#) [PG-TP-30D](#) [PG-DP-18-N](#) [4-1532129-2](#) [77 12 115](#) [0037](#) [571](#) [76C](#) [MICROFOX-SP-1\\_DB](#) [37 31 125](#) [RX 8130](#)  
[37 33 125](#) [DRP10N](#) [32 11 135](#) [36 12 130](#) [0036](#) [0032](#) [HT-109](#) [6211-06](#) [6214-45](#) [6217-05](#) [6231-07](#) [6231-08](#) [6411-06](#) [DP15N](#) [DP20N](#) [PN](#)  
[5050/10D](#) [PN 5050/19D](#) [PNI 5000](#) [TR 20 M](#) [TR 25 15](#) [TR 25 P A](#) [TR 30 58 R A](#) [TR 5000](#) [TR 5000 10 D](#) [TR 5000 PG](#) [TR 5000 PR](#)  
[MICROFOX-SP\\_DB](#) [CUTFOX-SE LM](#) [CUTFOX-SE LM\\_DB](#) [FMHT0-80519](#) [TR 58 R A](#) [43333](#) [102ACAX](#) [103ACA](#) [141SAP](#) [150SAD](#)  
[150SAMB](#)