Wiha Werkzeuge GmbH

Obertalstraße 3-7

Wiha Tools Ltd.

17 The Courtyard
Buntsford Gate
Bromsgrove B60 3DJ
Phone +44 1527 57 57 58
+44 1527 91 09 86
Fax +44 1527 91 00 23
info.uk@wiha.com
www.wiha.com/en

Wiha France SARL

Z. A. de Terrefort
33520 Bruges/France
Phone +33 5 56 16 79 35
Fax +33 5 56 16 79 36
servicecommercial@wiha.fr
www.wiha.com/fr

Wiha Nordic A/S

Korskildelund 6 2670 Greve/Denmark Phone +45 70 23 80 45 info.nordic@wiha.com www.wiha.com

Wiha Iberia Willi Hahn S.A.

Av. del Rey Juan Carlos I, 98. 3° C 28916 Leganés/Madrid, Spain Phone +34 91 693 85 11 Fax +34 91 693 63 83 iberia@wiha.com www.wiha.com/es

Wiha Polska Sp. z o.o.

ul. Budowlanych 10 b 80-298 Gdańsk/Poland Phone +48 58 762 38 30 Fax +48 58 762 39 00 info.pl@wiha.com www.wiha.com/pl

Wiha in Russia

Phone +48 58 762-38-30 Fax +48 58 762-39-00 michal.moczynski@wiha.com www.wiha.com

Willi Hahn Corp.

1348, Dundas Circle Monticello, MN 55362/USA Phone +1 763 2 95 65 91 Fax +1 763 2 95 65 98 cservice@wihatools.com www.wihatools.com

Wiha Tools Canada Ltd.

394 Deerhurst Drive L6T 5H9, Brampton, ON Phone +1 866 494 0096 Fax +1 800 494 7456 info@wihatools.ca www.wihatools.ca

Wiha Asia Pacific Pte. Ltd.

25 International Business Park #02-102 German Centre Singapore 609916 Phone +65 6563 1277 Fax +65 6563 7168 info.sg@wiha.com www.wiha.com

Wiha Tools (Shanghai) Co.Ltd.

 Rm14B Zhaofeng
 P

 Universe Building
 B

 1800 Zhongshanxi Road
 P

 Shanghai 200235
 F

 China
 s

 Phone +86 21 6440 1119
 w

 Fax
 +86 21 6440 1112

www.wiha.com.cn Wiha en Belgique

info@wiha.com.cn

Phone +32 49 35 054 50 info.belux@wiha.com www.wiha.com

Wiha in Nederland

Phone +31 64 63 113 30 info.nl@wiha.com www.wiha.com/nl

Wiha in Italia

Thoelke Rappresentanze Srl Phone +39-0332-966039 info.it@wiha.com www.wiha.com/it

Premium Tools Australia Pty Ltd.

PO Box 63 Bargo, NSW 2574 Phone +61 02 4664 1460 Fax +61 02 8088 7272 sales@wiha.com.au www.wiha.com.au

Premium Tools (NZ) Ltd.


Unit 5C 89 Ellice Road Wairau Valley Auckland, New Zealand Phone +64 09 444 2560 Fax +64 09 355 0411 sales@wiha.co.nz www.wiha.co.nz

Robert Rieffel AG


Widenholzstrasse 8
8304 Wallisellen/Switzerland
Phone +41 44 877 33 33
Fax +41 44 877 33 22
info@rieffel.ch
www.rieffel.ch


www.wiha.com



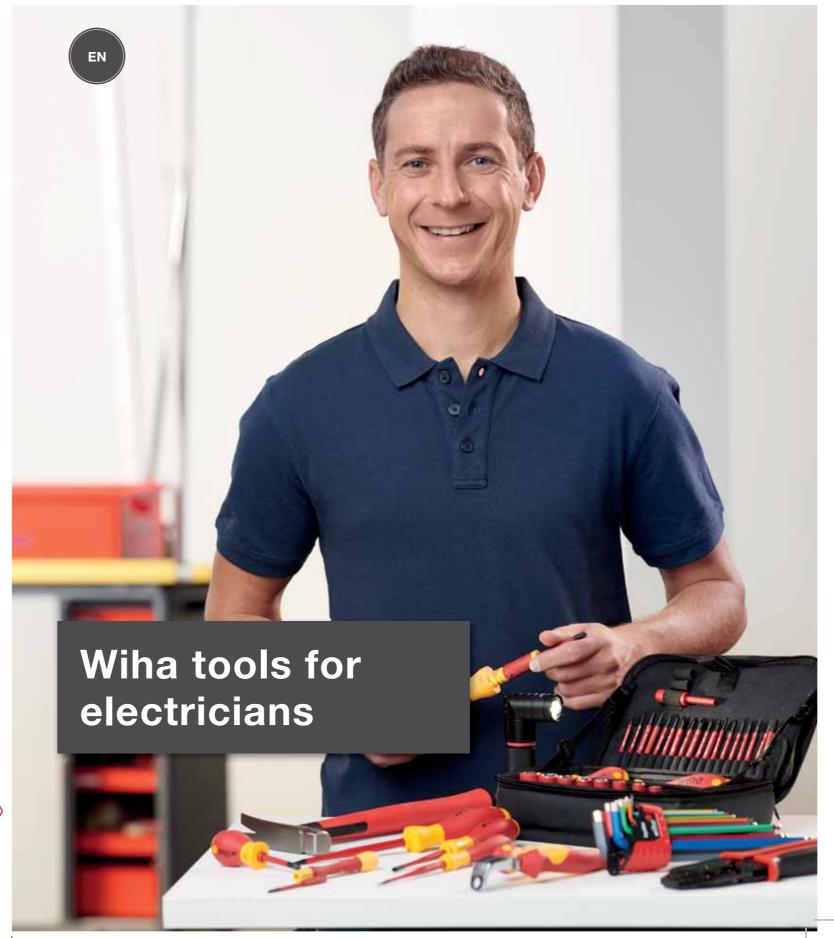







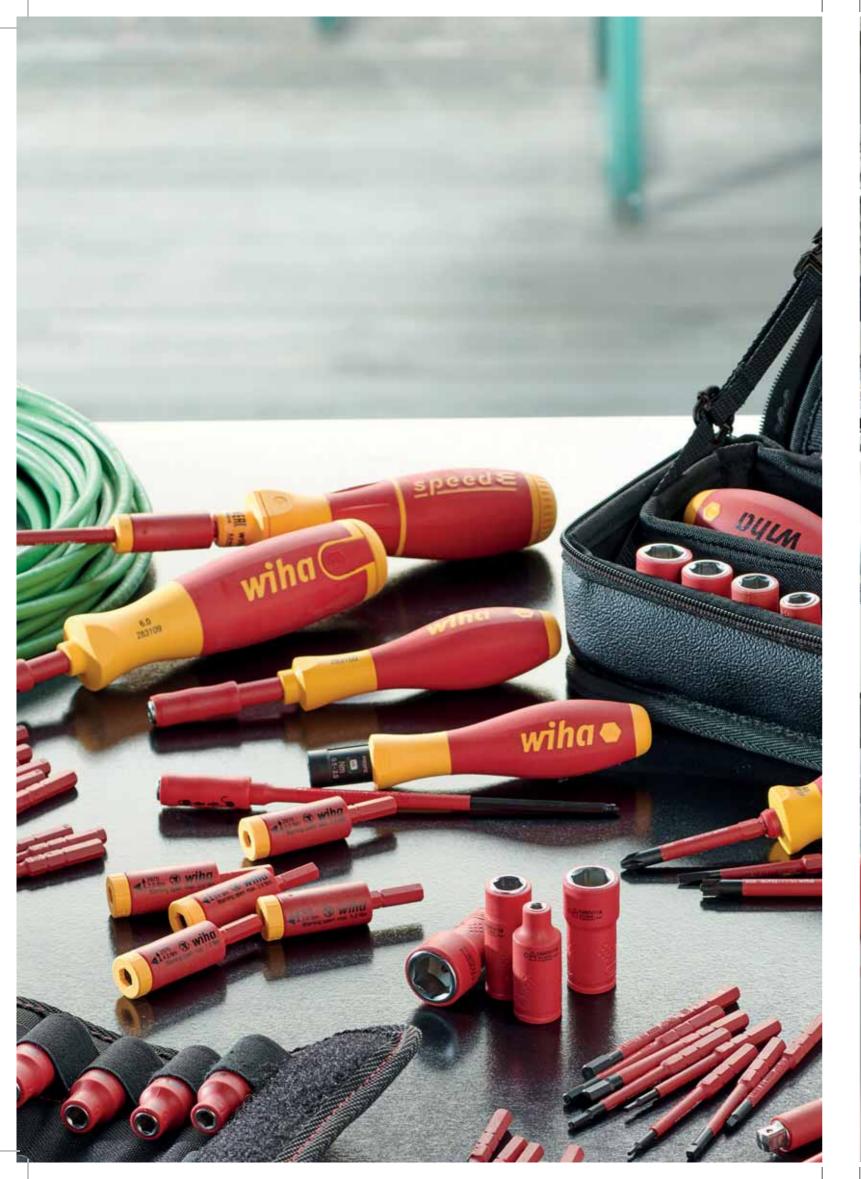



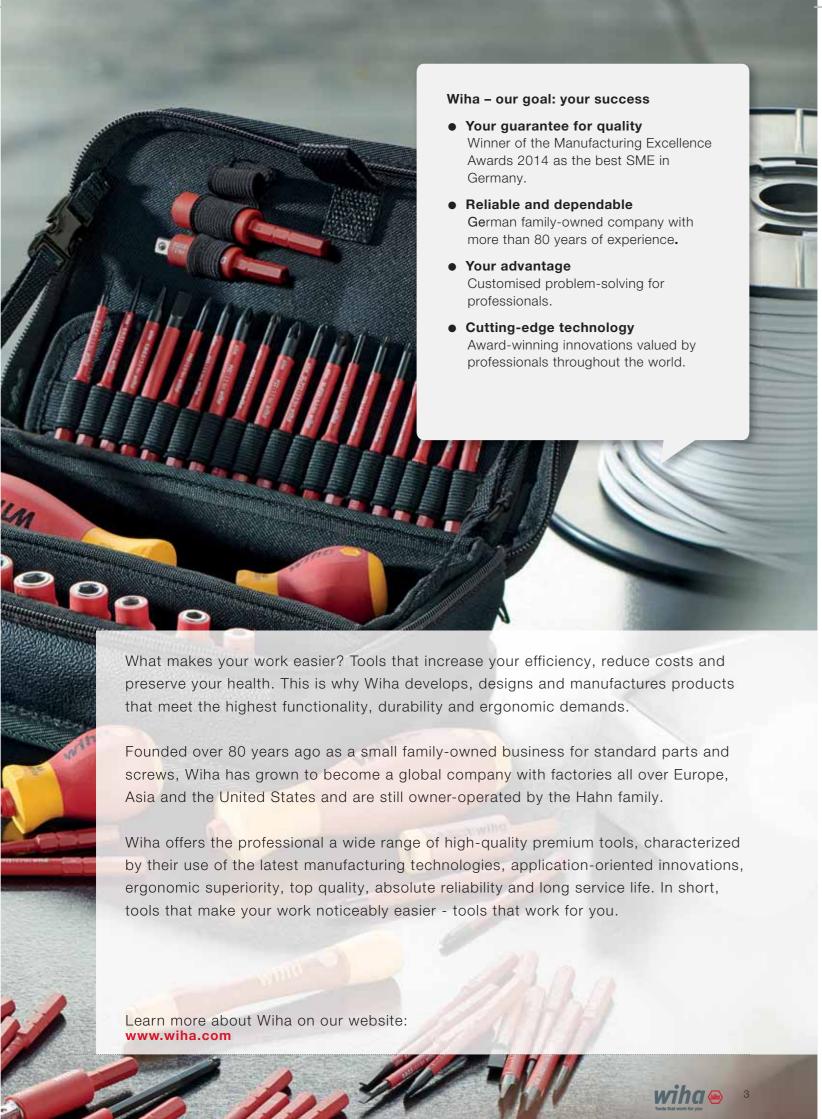

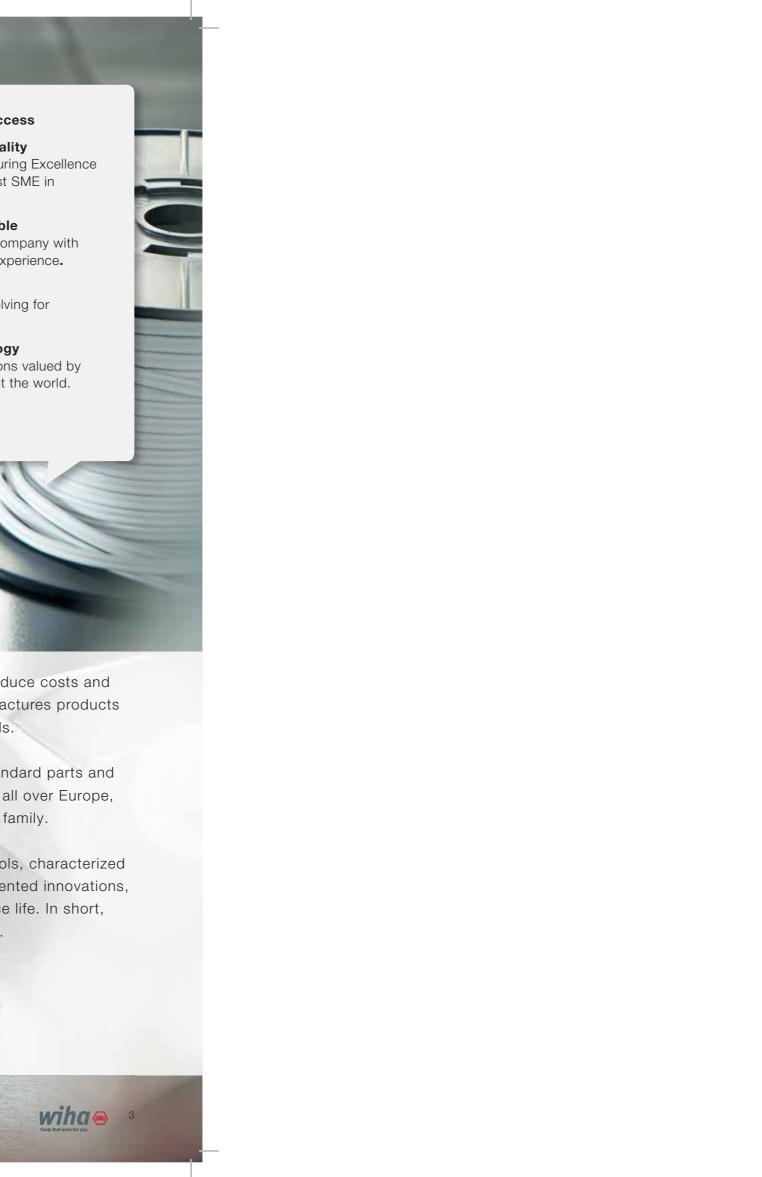

VDE-insulated tools from Wiha

To work safer, more efficiently and with less strain on the body.





Certified safety – from our own safety testing procedure according to IEC standards.

Voltage testing: All Wiha VDE-tools, which have special markings, are individually tested at 10,000 V AC and are approved for 1,000 V AC and 1,500 V DC.

Cold shock test: Cooling down to -25° C. The skinning material must retain its toughness, so that it doesn't break when subjected to shock and knocks.

Test of electrical skinning properties: 24 hours storage in water, then 3 minutes test at 10,000 V AC. There must neither be flashover nor disruptive discharge.

Test of the adhesion of the skinning material coating: 168 hours storage at 70° C, then test of adhesion at 500 N.

Pressure tests: Test at 20 N pressure load, 70° C temperature and 5,000 V AC test voltage. No disruptive discharge may occur.

Test of combustion behaviour: The tools are subjected to a flame for 10 seconds. The skinning material must then extinguish and not continue to burn.

Safety note

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms

insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- ensure power is switched off
- cover or block off adjacent live components
- secure against reconnection
- earth and short-circuit





As an internationally recognized institute, the VDE is responsible for the testing and certification of electrotechnical products. Wiha provides the professional with a broad range of VDE products, developed and continuously optimized specifically for electricians, which also provide applicationoriented solutions for everyday use.

The Wiha quality-management system according to ISO 9001:2015 ensures that only first-class products are manufactured – and that you can work with products of excellent quality. To ensure maximum safety for the user, the entire Wiha VDE range must undergo the most stringent inspections and individual tests. All Wiha VDE-tools hold multiple certifications: The VDE-GSmark stands for safety with regard to any risk, from electrical right up to radiological. Products labelled with a double triangle and a voltage range are suitable for work with live parts.


The international standard IEC 60900 defines the construction, safety as well as single, series, andrandom testing of insulated tools. But with Wiha you don't just work safer, but also healthier and moreefficiently. Specially developed ergonomic geometries ensure comfortable handling that protects body from strain. The result: easier work, less signs of fatigue, more efficiency.





83 professionelle. Ét system.

ElectricVario Family fra Wiha.

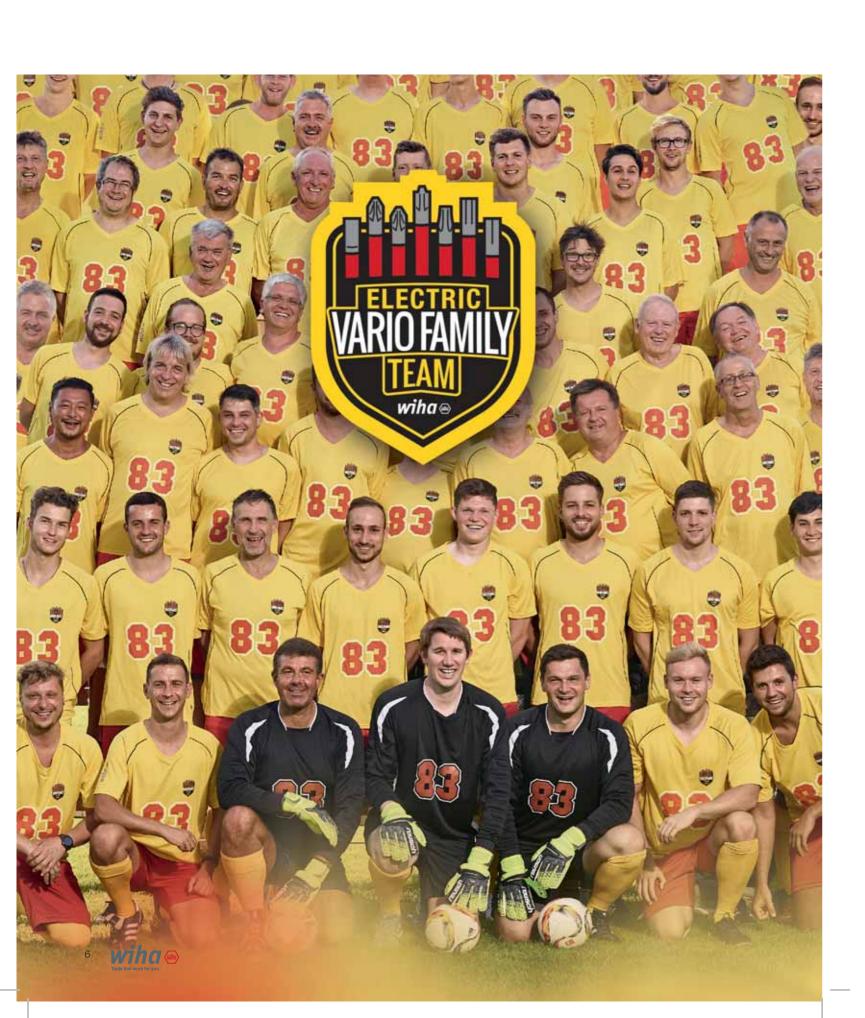

There has never been a team with so many exceptional players: the ElectricVario Family by Wiha unites all fastening tools that electricians need for all the challenges in their job. These include many new members to complete the team. The best thing about them: Thanks to the countless combination possibilities, the tools can be used flexibly and thus save valuable time and space. Combinable with one another, the tools also ensure safe screw-fastening on live parts thanks to their insulation. The ergonomically shaped screwdriver handles also help to protect the user's muscles. Professional users play in the Premier League when they use ElectricVario Family products. They can always be identified via the ElectricVario Family logo.

Increases your efficiency


Various usage options for all fastening procedures and application fields.

Provides you with full protection

Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC.

Increases your safety

Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.

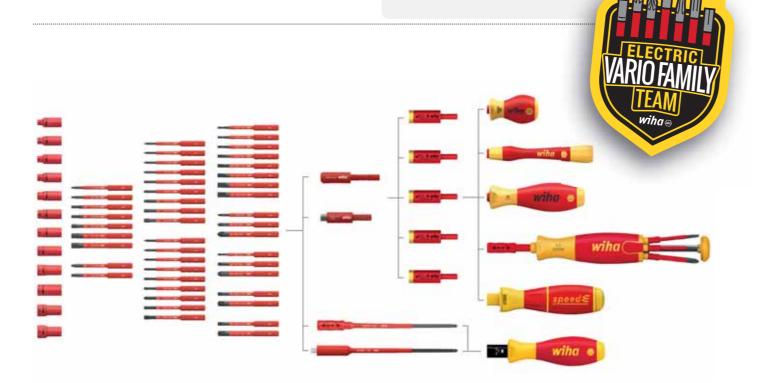





Content

Competence XXL II electrician's tool set Page 14



E-screwdriver, set 1, speedE® Page 30



Torque screwdriver TorqueVario®-S electric Page 36



BiCut® Professional electric high-performance diagonal cutters with DynamicJoint® Page 100



Tool set service technician



easyTorque torque set electric Page 40



slimBit electric bit set



Heavy-duty diagonal cutters Professional electric with **DynamicJoint®** Page 102



Tool set slimVario® electric Page 19



Torque screwdriver with T-handle TorqueVario®-S T electric Page 46



Screwdriver with bit magazine LiftUp electric Page 50



Cable cutter Professional electric Combination pliers Page 103



Tool set electrician Page 21



Screwdriver with bit holder set SoftFinish® electric slimVario® Page 54



slimVario® electric Page 55



Professional electric with DynamicJoint® and OptiGrip Page 103



Needle nose pliers Professional electric Page 108



High-leverage combination pliers Water pump pliers Professional electric with DynamicJoint® and OptiGrip Page 108



Professional electric Page 108



Water pump pliers Professional electric Page 109



Installation pliers TriCut Professional electric Page 120



Stripping diagonal cutters Professional electric with DynamicJoint®



Stripping pliers Professional electric Page 120



Needle nose pliers Inomic® VDE Page 121



Flashlight with LED, laser and UV light Page 130



Torque QuickCheck torque testing device



Voltage tester Volt Detector non-contact, single-pole, 230-1,000 VAC



Voltage tester SoftFinish® single-pole, 110-250 volts Page 132



SoftFinish® dowel racket set with dowels





Electrician's hammer Page 138





| ewdriver with bit magazine | Single open-end spanner set, insulated 6-32 mm Page 24 | Range of Applications From page 10 |
|----------------------------|---|---|
| | | |
| | | |
| netic e 80 | L-key set in ErgoStar holder Page 92 | Fastening / jamming From page 26 |
| e 84 | | |
| | | |
| | Hacksaw electric Page 104 | Trimming / cutting From page 96 |
| | | |
| | Classic circlip pliers with MagicTips®, straight Page 115 | Supplying / holding From page 106 |
| | | |
| | Automatic crimp tool Page 123 | Stripping/ insulating / crimping From page 116 |
| | | |
| | | Surveying/marking/measuring/ |
| | | From page 126 |
| | | |
| | | Striking/ chiselling From page 134 |
| | ar for electricians 104 s wrench Classic 110 rping tool automatic 122 trician's spirit level 133 | r for electricians 104 Bayes 104 Classic circlip pliers with MagicTips®, straight Page 115 Page 123 Automatic crimp tool Page 123 Automatic spirit level |









The range.

Cases that really deliver.

The professional often has reservations about conventional tool boxes: too inaccessible, little storage space, not robust enough. Deficiencies that Wiha has taken to heart – and eliminated –in the development of its case sets.

Wiha cases therefore combine many good qualities: Stable inline rollers allow easy and stress-free transportation of tools. The durable PP-plastic with reinforced plastic elements ensures a longlifespan. Gas-filled shock absorbers hold the cover in all positions and reduce the risk of injury when closing. Tool trays ensure quick and easy access to the tool, the case itself provides a lot of extra storage space for small items and machines. And, last but not least, you can easily access the right tool, whenever it is needed.


"A case with all major Wiha tools and innovations - like Christmas for the electrician!" Rolf Muschal







Your entire workshop - now you can take it with you!

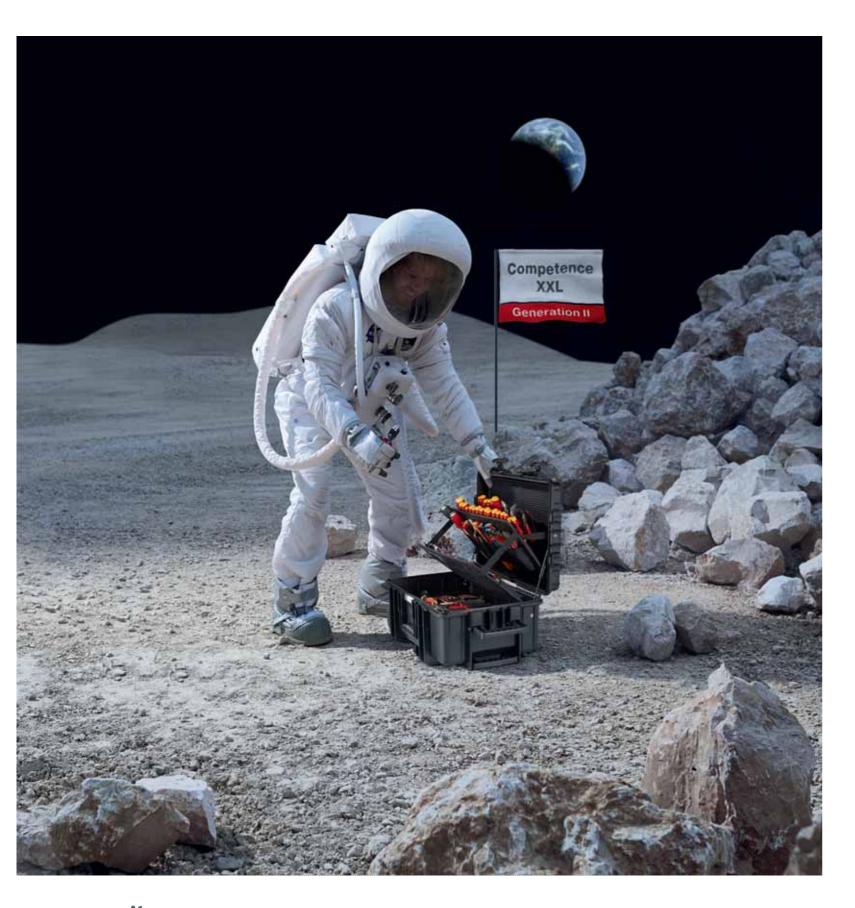



Whether next door or at the most remote site: It's greatif the tool you need is quickly at hand. Compact, handyand robust, the Wiha toolbox set ensures access to he tools you require, at any time and in any situation. Specially compiled according to varying requirements and applications, the Wiha toolbox sets have one thingin common: All include high-quality tools in provenWiha quality, guaranteeing easy and efficient working. Ergonomic in design, durable in material and processing, and safe thanks to rigorous and extensive safety test procedures, Wiha tools prove to be a practical and indispensable companion for the electrician, especially in their toolbox set.

Increases your efficiency

A wide range of tools – so the right one is always to hand when you need it.

• Meets your requirements

Robuust, groot, duurzaam en veilig met dekseluithouder

Lowers your costs

The correct torque avoids damaging material and no follow-up work is necessary.

• Increases your safety

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





Competence XXL II electrician's tool set













Meets your requirements: Case: robust, large, stable and secure with lid brake. Lowers your costs: The correct torque protects material from damage and ensures no additional follow-up work. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. Protects your health: Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Trolley with stable in-line rollers allow easy and stress-free transportation of tools to the work area. Increases your efficiency: A comprehensive tool assortment, always providing you with the right tool when it is needed. The design and function of the tool trays guarantee quick and easy access to tools. Increases your flexibility: Ample space for additional tools and lots of storage for small parts and machines.



| assorted | in | CASE | 115 | -ncs |
|----------|----|------|-----|------|

| assorted in case 115-pcs. | 9300-704 |
|---------------------------|----------|
| Order-No. | |
| 42069 | |
| | |

| 42069 | 1 | |
|-----------------|--|-------|
| Fastenin | g / jamming | |
| ⊖ (10 € (10 €) | Torque screwdriver set TorqueVario®-S electric (36791) 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings, Tool tested at 10,000 V AC /1 x Adjusting tool for torque screwdrivent long handle /1 x Adapter TorqueVario-S electric for slimBits 1 x 2,5 /1 x 3,5 /1 x 5,5 /1 x 6,5 /1 x PH1 /1 x PH2 /1 x PZ1 PZ2 /1 x SL/PZ1 /1 x SL/PZ2 /1 x T9 /1 x T10 /1 x T15 /1 x T20 /1 x T | |
| | Screwdriver with bit magazine LiftUp electric (41234) 1 x 2,5 /1 x 3,5 /1 x 5,5 /1 x PZ1 PZ2 /1 x SL/PZ2 | |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits, Tool tested at 10,000 V AC (41229) | |
| ₩ | slimBit electric bit Pozidriv, Tool tested at 10,000 V AC / PZ2 x 75 (34586) | |
| \ominus | Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 5,5 x 125 (35391) / 6,5 x 150 (35392) | 2) |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394) | |
| ₩ | Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396) | |
| ₩ | Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330) | |
| • | Screwdriver SoftFinish® electric slimFix TORX® Tamper Resistant (with hole), Tool tested at 10,000 V AC / T10H x 100 (41141) / T15H (41142) / T20H x 100 (41143) / T25H x 125 (41144) | x 100 |

- (41142) / T20H x 100 (41143) / T25H x 125 (41144)
- Screwdriver SoftFinish® electric Hex nut driver, Tool tested at 10,000 V AC / 0
- 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861) / 13 x 125 (00864)
- Fine screwdriver PicoFinish electric Phillips, Tool tested at 10,000 V AC $\,/\,\,$ PH0 x 60 (38880)
- Fine screwdriver PicoFinish electric Slotted, Tool tested at 10,000 V AC / 2,5 x 60 (38876)
- \oplus \oplus \bullet \bullet \bullet Switch cabinet key pen shape in blister pack 5-8 x 9 (39076)
- Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 3,5 x 75 (03223) / 12,0 x 200 (03231)
- XLSelector Y bit set, 25 mm (41832) 1 x PH1 / 4 x PH2 / 1 x PH3 /2 x PZ1 /4 x PZ2 /2 x PZ3 /2 x T10 /3 x T15 / 3 x T20 /3 x T25 / 3 x T30 /2 x T40 /1 x Bit holder magnetic extra strong magnet, 1/4"
- L-key set in ErgoStar holder (41979) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10 Trimming / cutting Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, Tool tested at 10,000 V AC / 200mm, 8" (38191) Professional electric diagonal cutters with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 1/2" (26741) Cable cutter Professional electric, Tool tested at 10,000 V AC / 200mm, 8" (34744) Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189)

Supplying / holding

- Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7"
- Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, Tool tested at 10,000 V AC / 200mm, 8" (26729)
- Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Water pump pliers Professional electric with push button adjustment, Tool tested at 10,000 V AC / 250mm, 10" (37450)

Stripping/ insulating / crimping

- Installation pliers TriCut Professional electric 170mm, 7" (38552) Stripping tool with self-rotating trailing blade 165mm, 61/2" (35969) Stripping tool automatic up to 16 mm² in blister pack 200mm, 8" (42062) Automatic crimp tool for wire-end sleeves hex crimping 210mm, 0,08-16mm² (41246)
- Crimp tool for insulated cable eyes and contacts 220mm, 0,5-6mm² (33841)
- Shear for electricians with crimp function in blister pack 160mm, 50mm² (41923)

Surveying/marking/measuring/checking

- Voltage tester Volt Detector non-contact, single-pole, 230-1,000 VAC (37871) Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)
- $Flashlight\ with\ LED,\ laser\ and\ UV\ light\ in\ blister\ pack,\ including\ 3\ AAA\ batteries\ 100\ /\ 310\ lm\ x\ 390\ -\ 400\ nm\ (41286)$
 - Electrician's spirit level 40 cm (42074)
 - Electrician's Longlife® folding ruler, 2 m metric, 10 segments (42068)
- SoftFinish® dowel racket set with dowels (41289) 1 x Dowel racket Phillips /2 x 30/2 x 40

Striking/ chiselling

Electrician's hammer with 300 g hammer head, in blister pack 23,9 x 283 (42071)



Tool set electrician Competence XL













Meets your requirements: Case: robust, large, stable and secure with lid brake. Lowers your costs: The right tool protects you from damaging materials and avoids subsequent work. Increases your safety: Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Gas-filled shock absorbers hold the lid in all positions and reduce the risk of injury when closing. Protects your health: Wiha pliers require less force and reduce pressure on wrists. Ergonomic handle design makes work easier and prevents occupational illnesses. Carry belt enables the simple transport of the tool case and keeps hands free for other materials. Increases your efficiency: A comprehensive tool assortment, always having the right tool at hand when needed. The design and function of the tool trays guarantee quick and easy access to tools. Increases your flexibility: Ample space for additional tools and lots of storage for small parts and machines.



| assorte | d 80-pcs. in case |
|---|---|
| Order-No | 0. |
| 40523 | 1 |
| Fasteni | ng / jamming |
| 0 | Screwdriver SoftFinish® electric Hex nut driver, Tool tested at 10,000 V AC / 5,5 x 125 (00856) / 7 x 125 (00858) / 8 x 125 (00859) / 10 x 125 (00861) |
| 0 | Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at $10,000 \text{ V AC} / 3,5 \times 100 (35446) / 4,0 \times 100 (35390) / 5,5 \times 125 (35391) / 6,5 \times 150 (35392)$ |
| ⊕ | Screwdriver SoftFinish® electric slimFix electric PlusMinus/Phillips, Tool tested at 10,000 V AC / SL/PH1 x 80 (35502) / SL/PH2 x 100 (35503) |
| ₩ | Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ1 x 80 (36329) / SL/PZ2 x 100 (36330) |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394) |
| ₩ | Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396) |
| Θ | Screwdriver SoftFinish® Slotted with one-piece hexagonal blade and solid steel cap 12,0 x 200 (03231) |
| $\ominus \oplus \diamond \circ$ | O Switch cabinet key cross shape (36114) |
| $\ominus \oplus \circledast$ | Screwdriver with bit magazine LiftUp electric (38611) 1 x 3,0 /1 x 4,0 /1 x 5,5 /1 x PH1 /1 x PH2 /1 x SL/PZ2 |
| • | L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10 |
| ⊖⊕⊕• | Bit set XLSelector Standard 25 mm (29417) 1 x 4,5 /1 x 5,5 /1 x 6,5 /2 x PH1 /4 x PH2 /1 x PH3 /2 x PZ1 /5 x PZ2 /1 x PZ3 /2 x T10 / 2 x T15 /2 x T20 /3 x T25 /2 x T30 /1 x T40 /1 x Bit holder magnetic, 58 mm 1/4" |
| Trimmir | ng / cutting |
| X | Professional BiCut® high-performance diagonal cutters with DynamicJoint® Switchable, Tool tested at 10,000 V AC / 200mm, 8" (38191) |
| X | Professional electric diagonal cutters with DynamicJoint®, Tool tested at 10,000 V AC / 180mm, 7" (26744) |
| < | Precision mechanic's diagonal cutters Classic with opening spring 125mm, 5" (36189) |
| Supplyi | ng / holding |
| | Water pump pliers Professional electric with push button adjustment, Tool tested at 10,000 V AC / 250mm, 10" (37450) |
| • | Needle nose pliers Professional electric with cutting edge curved shape, approx. 40°, Tool tested at 10,000 V AC / 200mm, 8" (26729) |
| | Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (26708) |
| • | Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727) |
| Strippin | ng/ insulating / crimping |
| X | Installation pliers TriCut Professional electric 170mm, 7" (38552) |
| | Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050) |
| | Stripping tool with self-rotating trailing blade 165mm, 61/2" (35969) |
| | Crimp tool for wire-end sleeves 220mm, 0,14-16mm² (33844) |
| Surveyi | ng/marking/measuring/checking |
| *************************************** | Voltage tester Volt Detector non-contact, single-pole, 230-1,000 VAC (37871) |
| Θ | Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745) |
| | |

Folding ruler Longlife 2 m metric, 10 segments (27057)

Switch cabinet spirit level 20 cm (36859)





Tool set service technician







Meets your requirements: Carefully selected tool ranges for the most common applications. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Increases your efficiency: Compact and space-saving tool range.

| assorte | d 29-pcs. in bag | 9300-03 |
|---|---|-----------|
| Order-No | D | ** |
| 37137 | | 1 |
| Fasteni | ng / jamming | |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 5,5 x 125 (35391) | |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394) | |
| ₩ | Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396) | |
| Θ | PicoFinish® fine screwdriver Slotted 1,5 x 40 (42384) / 2,0 x 40 (42388) / 2,5 x 50 (42391) / 3,0 x 50 (42394) | |
| ⊕ | PicoFinish® fine screwdriver Phillips PH00 x 40 (42402) / PH0 x 50 (42401) | |
| $\ominus \oplus \diamond \circ$ | O Switch cabinet key cross shape (36114) | |
| • | L-key set in Compact holder (01418) 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10 | |
| Trimmir | ng / cutting | |
| X | Professional electric diagonal cutters with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741) | |
| <u></u> | Diagonal cutters Electronic wide, pointed head without bevelled edge 130mm, 5 ½" (26818) | |
| Supplyi | ng / holding | |
| • | Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727) | |
| | Needle nose pliers Electronic narrow, short head straight form 150mm, 6" (26801) | |
| Strippin | ıg/ insulating / crimping | |
| *************************************** | Stripping tool with self-rotating trailing blade 165mm, 61/2" (35969) | |
| Surveyi | ng/marking/measuring/checking | |
| Θ | Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745) | |





Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Space saved thanks to extensive interchangeable bit system and nut driver inserts. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated nut driver reduces the risk of short circuits.







Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Compact and space-saving tool range. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

mixed, 31-pcs. in functional bag

| Order-No. 43465 1 | | 1-44. |
|---|----------------|---|
| ⊇,0 x 75• / 3,5 x 75 / 5,5 x 75 / 6,5 x 75 ⊕ PH0 x 75• / PH1 x 75 / PH2 x 75 ⊕ SL/PZ1 x 75 / SL/PZ2 x 75 ⊕ PZ1 x 75 / PZ2 x 75 ⊙ 5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42 ⊕ 3 x 75 / 4 x 75 / 5 x 75 ⊕ T10 x 75• / T15 x 75 / T20 x 75 / T25 x 75 slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | Order-No. | 3 |
| PH0 x 75 PH1 x 75 / PH2 x 75 SL/PZ1 x 75 / SL/PZ2 x 75 PZ1 x 75 / PZ2 x 75 FZ1 x 75 / PZ2 x 75 5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42 3 x 75 / 4 x 75 / 5 x 75 T10 x 75 T15 x 75 / T20 x 75 / T25 x 75 slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | 43465 | 1 |
| SL/PZ1 x 75 / SL/PZ2 x 75 PZ1 x 75 / PZ2 x 75 5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42 3 x 75 / 4 x 75 / 5 x 75 T10 x 75 • / T15 x 75 / T20 x 75 / T25 x 75 slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | Θ | 2,0 x 75• / 3,5 x 75 / 5,5 x 75 / 6,5 x 75 |
| PZ1 x 75 / PZ2 x 75 5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42 3 x 75 / 4 x 75 / 5 x 75 T10 x 75 • / T15 x 75 / T20 x 75 / T25 x 75 slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | *** | PH0 x 75• / PH1 x 75 / PH2 x 75 |
| O 5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42 ③ 3 x 75 / 4 x 75 / 5 x 75 T10 x 75 | ₩ | SL/PZ1 x 75 / SL/PZ2 x 75 |
| 11 x 42 / 13 x 42 3 x 75 / 4 x 75 / 5 x 75 T10 x 75 • / T15 x 75 / T20 x 75 / T25 x 75 slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | ₩ | PZ1 x 75 / PZ2 x 75 |
| T10 x 75• / T15 x 75 / T20 x 75 / T25 x 75 slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | 0 | |
| slimVario® electric adapter for 1/4" nut driver slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | | 3×75 / 4×75 / 5×75 |
| slimVario® electric extension for slimBits Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | (*) | T10 x 75• / T15 x 75 / T20 x 75 / T25 x 75 |
| Screwdriver with bit holder SoftFinish® slimVario® electric Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | | slimVario® electric adapter for 1/4" nut driver |
| Fine screwdriver PicoFinish® slimVario® electric Screwdriver with bit holder SoftFinish® electric slimVario Stubby | | slimVario® electric extension for slimBits |
| Screwdriver with bit holder SoftFinish® electric slimVario Stubby | | Screwdriver with bit holder SoftFinish® slimVario® electric |
| | | Fine screwdriver PicoFinish® slimVario® electric |
| | 0 | |

no slim version

Manufactured acc. to IEC 60900.

| crewdr | iver, diagonal cutters, 6-pcs. in bag | 9300-01 |
|----------|---|---------|
| Order-No | - | |
| 33969 | | 1 |
| astenin | g / jamming | |
| 9 | Screwdriver SoftFinish® electric Slotted, Tool tes 10,000 V AC / 3,5 x 100 (00822) / 4,5 x 125 (05,5 x 125 (00826) | |
| Ð | Screwdriver SoftFinish® electric Phillips, Tool test 10,000 V AC / PH1 x 80 (00847) / PH2 x 100 | |
| Γrimmin | g / cutting | |
| K | Professional electric diagonal cutters with Dynan tested at 10,000 V AC / 160mm, 6 ½" (26741) | , |











Increases your efficiency: Compact and space-saving tool range. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

screwdriver, needle nose pliers, diagonal cutters,

| 5-pcs. | in bag | 9300 |
|----------|--|-----------|
| Order-N | No. | <u> </u> |
| 26755 | 1 | |
| Fasteni | ing / jamming | |
| Θ | Screwdriver SoftFinish® electric Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (00822) / 5,5 x 125 (00826) |) |
| ⊕ | Screwdriver SoftFinish® electric Phillips, Tool tested at 10,000 V AC / PH2 x 100 (00848) | |
| Trimmi | ing / cutting | |
| X | Professional electric diagonal cutters with DynamicJoir tested at 10,000 V AC / 160mm, 6 ½" (26741) | nt®, Tool |
| Supplyi | ring / holding | |

Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)









Meets your requirements: Carefully selected tool ranges for the most common applications. Increases your safety: Internationally awardwinning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. **Protects your health:** With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Compact and space-saving tool range.

assorted 12-pcs. in bag

| a3301 | ted 12-pcs. III bag | 9300-02 |
|-------------|--|------------------|
| Order-N | No. | |
| 36389 | | 1 |
| Faster | ning / jamming | |
| 0 | Screwdriver SoftFinish® electric slimFix Slotted 10,000 V AC / 3,5 x 100 (35446) / 4,5 x 125 5,5 x 125 (35391) | , |
| | Screwdriver SoftFinish® electric slimFix Pozidr 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 10 | , |
| Trimm | ling / cutting | |
| \$ | Cable cutter Professional electric, Tool tested 200mm, 8" (34744) | at 10,000 V AC / |
| Supply | ying / holding | |

Supplying / holdingTrimming / cutting

| 04 | in a deline / animatica |
|----------|--|
| <u> </u> | DynamicJoint $\!\!^{\otimes}$ with switchable opening spring 180mm, 7" (41274) |
| • | Heavy-duty diagonal cutters Professional electric with |

Stripping/ insulating / crimping

Stripping tool automatic up to 6 mm² in blister pack 190mm, 7 ½" (36050)

Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Stripping tool with self-rotating trailing blade 165mm, 61/2" (35969)

Surveying/marking/measuring/checking

| \ominus | | Voltage tester SoftFinish® single-pole, 110-250 volts Slotted |
|-----------|--------|---|
| | \Box | transparent, with push-on clip (34745) |
| | | Folding ruler Longlife 2 m metric, 10 segments (27057) |











Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Compact and spacesaving tool range. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

screwdriver, heavy-duty diagonal cutters, 7-pcs.

in bag Order-No. 38020 Fastening / jamming Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391) Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH2 x 100 (35394) Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ2 x 100 (35396) Screwdriver SoftFinish® electric slimFix PlusMinus/Pozidriv, Tool tested at 10,000 V AC / SL/PZ2 x 100 (36330)

Supplying / holdingTrimming / cutting

Heavy-duty diagonal cutters Professional electric with DynamicJoint® with switchable opening spring 160mm, 6,5" (40921)







Simplifies your work: Free hands and no damage to work trousers thanks to pouch attached to belt. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: All main tools quickly accessible, always at hand.

$_{\rm 9300\text{-}031}$ $\,$ assorted slotted, Phillips, 10-pcs. in belt pouch

Order-No.

9300-012-01

| 40948 | 1 |
|----------|--|
| Fasten | ing / jamming |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, Tool tested at 10,000 V AC $/$ 3,5 x 100 (35446) $/$ 4,0 x 100 (35390) $/$ 5,5 x 125 (35391) |
| ⊕ | Screwdriver SoftFinish® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394) |
| Strippi | ng/ insulating / crimping |
| | Stripping pliers Professional electric 160mm, 6 ½" (26847) |
| | Stripping tool with self-rotating trailing blade 165mm, 61/2" (35969) |
| Supply | ring / holding |

Surveying/marking/measuring/checking

Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745) Measuring tape 5 m (33251)

Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)





| 2 | |
|-----------------------|--|
| _ | |
| Ication | |
| = | |
| $\boldsymbol{\omega}$ | |
| Ö | |
| | |
| Q. | |
| Appl | |
| 1 | |
| | |
| ō | |
| U | |
| Φ | |
| ರಾ | |
| = | |
| ang | |
| ₩. | |
| _ | |
| | |
| | |
| | |
| | |
| _ | |

Tool set electrician



Bit set for mounting







Simplifies your work: Free hands and no damage to work trousers thanks to pouch attached to belt. Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Internationally award-winning VDE-insulated tools, each individually tested at 10,000 V AC and approved for use at 1,000 V AC. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: All main tools quickly accessible, always at hand.

adjustable blade length depending on application. **Increases your efficiency:** All common blades in one compact set.

Simplifies your work: Utmost accessibility thanks to long, 70 mm

bits. Also ideal for machine operation. Facilitates handling: Variably

| ssorted slotted, Pozidriv, 10-pcs. in belt pouch | 9300-013 |
|--|----------|
| | |

| 40282 | 1 | |
|----------|---|----|
| Fastenii | ng / jamming | |
| Θ | Screwdriver SoftFinish® electric slimFix Slotted, Tool tested 10,000 V AC / 3,5 x 100 (35446) / 4,0 x 100 (35390) / 5,5 x 125 (35391) | at |

Screwdriver SoftFinish® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)

Stripping/ insulating / crimping

Stripping pliers Professional electric 160mm, 6 ½" (26847)

Stripping tool with self-rotating trailing blade 165mm, 6½" (35969)

Supplying / holding

Order-No.

Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727)

Surveying/marking/measuring/checking

Oltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip (34745)

Measuring tape 5 m (33251)

19-pcs. in bag

79187 T04

| Order-No. | | | |
|-----------|---|----------------|--|
| 41223 | | 1 | |
| ③ | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 | 1 x T40 | |
| ⊕ | 1 x PH0 / 1 x PH1 / 1 x PH2 | | |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 | | |
| \ominus | 1 x 3,5 / 1 x 4,0 / 1 x 5,5 | | |
| | 1 x 4,0 / 1 x 5,0 / 1 x 6,0 | | |
| 0 | 1 x Bit holder magnetic, 74 mm 1/4" | | |
| 0 | 1 x Screwdriver handle SoftFinish®-telescopic interchangeable blade | c for SYSTEM 6 | |
| 0 | 1 x Bit holder SYSTEM 6 clamping with ball | | |







can be reached easily. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your flexibility: Adjustable right or left rotation through switching lever. Protects your material: Fully insulated tool reduces the risk of short circuits.

Increases your efficiency: Various usage options for all fastening procedures and application fields. Improved access: Deep-set screws procedures and application fields. Improved access: Deep-set screws can be reached easily. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your flexibility: Adjustable right or left rotation through switching lever. Protects your material: Fully insulated tool reduces the risk of short circuits.

| 20-pcs. in case | 7208N K2 |
|-----------------|----------|
| Order-No. | |

| 0.00 | | |
|---|---|-----------------|
| 43024 | | 1 |
| *************************************** | T-handle insulated for nut driver (43063) | |
| | Ratchet wrench insulated for nut drivers Switch mm | able 1/2" x 250 |
| 0 | Insulated extension 1/2" square adapter for nut insulated 1/2" x 250 mm / 1/2" x 125 mm | driver inserts, |
| 0 | Insulated nut driver insert 1/2" hexagon head 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 / 24 / 27 / 3 | 32 |
| • | Insulated nut driver insert 1/2" internal hexagon 5 x 120 mm / 6 x 120 mm / 8 x 120 mm / 10 x | |

Manufactured according to EN/IEC 60900.

20-pcs. in case

7207N K2001

| Order-No. | |
|-----------|---|
| 43023 | 1 |
| | T-handle insulated for nut driver (43062) |
| | Ratchet wrench insulated for nut drivers Switchable 3/8" x 200 mm |
| 0 | Insulated extension 3/8" square adapter for nut driver inserts, insulated 3/8" x 125 mm / 3/8" x 250 mm |
| 0 | Insulated nut driver insert 3/8" hexagon head 8 / 10 / 11 / 12 / 13 / 14 / 16 / 17 / 18 / 19 / 21 / 22 |
| • | Insulated nut driver insert 3/8" internal hexagon 4 x 75 mm / 5 x 75 mm / 6 x 75 mm / 8 x 75 mm |

Manufactured according to EN/IEC 60900.





Single open-end spanner set, insulated 6-32 mm





Increases your efficiency: Improved accessibility to restricted spaces thanks to 15° jaw positioning. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

20-pcs. in case

5590N T20

| Order-No. | |
|-----------|--|
| 43022 | 1 |
| 0 | Single, insulated open-end spanner 6 x 90 mm /7 x 90 mm /8 x 100 mm /9 x 100 mm / 10 x 110 mm / 11 x 110 mm / 12 x 130 mm / 13 x 135 mm / 14 x 145 mm / 15 x 150 mm / 16 x 160 mm / 17 x 160 mm / 18 x 175 mm / 19 x 175 mm / 22 x 195 mm / 24 x 225 mm / 27 x 250 mm / 30 x 290 mm / 32 x 310 mm |
| 0 | Adjustable spanner electric Adjustable between 0-30 mm 0 - 30 x 250 mm |

Manufactured according to EN/IEC 60900.











Fastening / jamming

We have the know-how at the tip of our fingers.

The ergonomic quality of a tool is never quite so apparent as when fastening and clamping. Underthe motto "A grasp on turning" Wiha presents an innovative handle size concept which breaks newground in terms of individual user comfort.

Many commonly available screwdrivers are not designed to meet the needs of users. This resultsin disadvantages in guiding the tool as well as in transmitting force while fastening. In contrast, the Wiha Soft Finish® concept works with four different handle sizes: Thus, each handle has a perfectly correlated ratio of guidance, speed and torque for any task.

The Wiha slimTECHNOLOGY offers additional comfort, permitting unrestricted access to each screw with 33 % slimmer blades.

The speedE® e-screwdriver proves itself to be the ideal tool for virtually every screw-fastening task. Whether handling delicate fastenings, long screws or an extremely large number of screws, professionals can do their job faster while working with the e-screwdriver.

"Thanks to the speedE®, I maintain complete control of the tightening force since the electrical-assisted screwdriving stops automatically at 0.4 Nm. Overtightened screws and defective controls are a thing of the past."

Simon Furrer, WorldSkills 2017 World Champion in Abu Dhabi, Industrial Control Category









Anyone who spends much of the day fastening screws knows how much time it takes and the considerable strain it causes to wrists for long periods of time. With the world's first e-screwdriver speedE® by Wiha, such problems become a thing of the past once and for all. With the speedE®, you fasten screws twice as fast as with a conventional screwdriver and still have full control over the tightening force thanks to the material protection function. On reaching 0.4 Nm, power-assisted fastening switches off automatically to protect the material and users can finish fastening carefully by hand. Thanks to its electric ratchet function and award-winning SoftFinish handle shape, the speedE® noticeably reduces strain on joints, tendons and muscles. It is recommended by German doctors and therapists at German Campaign for Healthier Backs for this very reason. The integrated LED light shines directly onto the screw and work piece that the user is working on. The e-screwdriver improves everyday efficiency, particularly due to its compact design. At least 800 screws can be fastened with its standard 18500 batteries when charged. It can also handle numerous different screw profiles when used in combination with Wiha slimBits. In combination with the VDE certified slimBits the speedE® offers electricians full protection during their daily work.

Protects your material

Electric screw fastening with a protection function to prevent damage to materials (max. 0.4 Nm).

Increases your speed

Work completed twice as fast thanks to a 3-step process.

Increases your control

Fixing by hand with a deft touch.

Protects your health

Recommended by doctors and therapists at German Campaign for Healthier Backs.

• Provides you with full protection

slimBits tested at 10,000 V AC and approved for 1,000 V AC.







E-screwdriver, set 1, speedE®



















Protects your health: Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your control: Fixing by hand with a deft touch. Provides you with full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Increases your speed: Work completed twice as fast thanks to a 3-step process. Protects your material: Electric screw fastening with a protection function to prevent damage to materials (max. 0.4 Nm).








Slotted, Phillips, PlusMinus/Pozidriv, 10 pcs in L Boxx Mini with slimBits, batteries and EU charger

590 T101

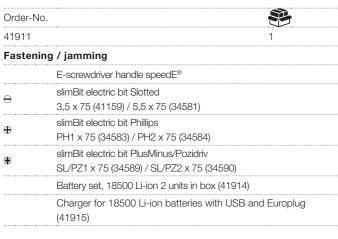

E-screwdriver, set 2, speedE®























Protects your health: Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your control: Fixing by hand with a deft touch. Provides you with full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Increases your speed: Work completed twice as fast thanks to a 3-step process. Protects your material: Electric screw fastening with a protection function to prevent damage to materials (max. 0.4 Nm).







Mixed 13 pcs in L Boxx Mini with slimBits, easyTorque adapter, batteries and EU charger

590 T102

| Order-N | 0. |
|--------------------|--|
| 41912 | 1 |
| Fasteni | ing / jamming |
| ******* | E-screwdriver handle speedE® |
| Α | slimBit electric bit Slotted |
| <u> </u> | 3,5 x 75 (41159) / 5,5 x 75 (34581) |
| (F) | slimBit electric bit Phillips |
| ⊐ | PH1 x 75 (34583) / PH2 x 75 (34584) |
| alle | slimBit electric bit Pozidriv |
| ক্ত | PZ1 x 75 (34585) / PZ2 x 75 (34586) |
| * | slimBit electric bit PlusMinus/Pozidriv |
| ক্র | SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590) |
| | easyTorque electric torque adapter for slimBits and slimVario holder in blister 2,8 Nm $\pm 10~\%$ (41344) |
| ****************** | Battery set, 18500 Li-ion 2 units in box (41914) |
| | Charger for 18500 Li-ion batteries with USB and Europlug (41915) |

















Protects your health: Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your control: Fixing by hand with a deft touch. Provides you with full protection: slimBits tested at 10,000 V AC and approved for 1,000 V AC. Increases your speed: Work completed twice as fast thanks to a 3-step process. Protects your material: Electric screw fastening with a protection function to prevent damage to materials (max. 0.4 Nm).




• no slim version






Mixed 25 pcs in L Boxx Mini with slimBits, easyTorque adapters, batteries and EU charger

590 T103

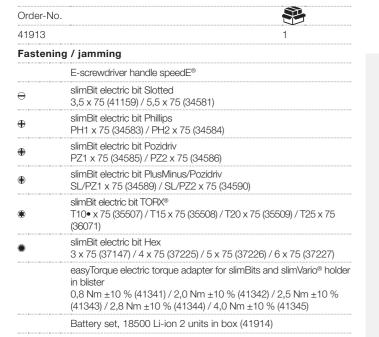

Charger for 18500 Li-ion batteries with USB and Europlug (41915)







| 2 units in box | 5991 |
|----------------|----------|
| Order-No. | 3 |
| 11914 | 6 |

Charger for 18500 Li-ion batteries



| · - | 598 |
|-----------|-----|
| Order-No. | *** |
| 41915 | 1 |

INFOBOX: Wiha speedE®





E-screwdriver speedE®

Power-assisted screw-driving halves working time.

- Thanks to the integrated material protection function, the electric assistance stops automatically at 0.4 Nm.
- Final screw tightening can then be carried out by hand.
- Recommended by doctors and therapists.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.





There are moments when you need to control your power.



Power is good. Controlled power is better. The fully certified Wiha VDE torque screwdriver systems TorqueVario®-S and TorqueVario®-S TR combine precision with safety: With a distinctly audible and perceptible click signal when the torque value is reached. With a release accuracy of +/-6 % of the set scale value, Wiha VDE screwdrivers meet the accuracy requirements of EN ISO 6789. Uncompromising safety is ensured in production and testing according to IEC 60900, VDE/GS certification and individual product testing at 10,000 V AC.

Increases your efficiency

Using the correct torque prevents from rework and damaged material.

Lowers your costs

The correct torque protects you from warranty claims.

Provides you with full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

• Increases your safety

Wiha slimBits grant unhindered, fully insulated access to deeplying screws.

















Meets your requirements: A variably settable torque covers a large application area. Simplifies your work: All tools securely arranged in a robust, orderly bag. Lowers your costs: The correct torque protects you from warranty claims. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

assorted, variably adjustable torque limit, 18-pcs. in bag

2872 T18

| Order-N | No. <u></u> |
|---------------|--|
| 36791 | 1 |
| 0 | 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings / 0,8 - 5 Nm |
| | 1 x Adjusting tool for torque screwdriver with long handle |
| 0 | 1 x Adapter TorqueVario-S electric for slimBits |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 |
| ⊕ | 1 x PH1 / 1 x PH2 |
| \$ | 1 x PZ1 / 1 x PZ2 |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 |
| (*) | 1 x T9• / 1 x T10• / 1 x T15 / 1 x T20 / 1 x T25 |

no slim version

Manufactured acc. to IEC 60900. DIN EN ISO 6789.















Meets your requirements: A variably settable torque covers a large application area. Simplifies your work: All tools securely arranged in a robust, orderly bag. Lowers your costs: The correct torque protects you from warranty claims. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

assorted, variably adjustable torque limit, 13-pcs. in bag

2872 T13

| Order-No | o. <u>&</u> |
|----------|--|
| 40674 | 1 |
| 0 | 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings / 0,8 - 5 Nm |
| ****** | 1 x Adjusting tool for torque screwdriver with long handle |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits |
| 0 | 1 x Adapter TorqueVario-S electric for slimBits |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 |
| \oplus | 1 x PH1 / 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 |

no slim version
 Manufactured acc. to IEC 60900. DIN EN ISO 6789.





TorqueVario®-S electric nut driver insert 1/4" set







7209N

Simplifies your work: All tools securely arranged in a robust, orderly bag. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your flexibility: Nut driver inserts can be used with speedE®, slimVario® and TorqueVario®-S tools thanks to the enclosed adapters. **Protects your material:** Fully insulated nut driver reduces the risk of short circuits.

Mixed, 10-pcs., with adapters in folding bag

| Order-No | o. ———————————————————————————————————— |
|----------|--|
| 43466 | 1 |
| 0 | 1 x slimVario® electric adapter for 1/4" nut driver |
| 0 | 1 x Adapter TorqueVario-S electric for 1/4" nut driver |
| 0 | 1 x 5 / 1 x 5,5 / 1 x 6 / 1 x 7 / 1 x 8 / 1 x 10 / 1 x 11 / 1 x 13 |

Torque screwdriver set TorqueVario®-S electric












Lowers your costs: The correct torque protects you from warranty claims. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

PlusMinus/Pozidriv variably settable torque limit 5-pcs.

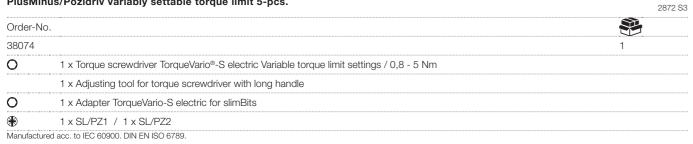



| | 1 |
|--|---|
| 1 x Torque screwdriver TorqueVario®-S electric Variable torque limit settings / 0,8 - 5 Nm | |
| | |
| 1 x Adjusting tool for torque screwdriver with long handle | |
| 1 x Adapter TorqueVario-S electric for slimBits | |
| 1 x SL/PZ1 / 1 x SL/PZ2 | |
| acc. to IEC 60900. DIN EN ISO 6789. | |
| | |
| | |
| | |
| ibaa | |
| iha (um) | |
| t work for you | |
| | |











Meets your requirements: A variably settable torque covers a large application area. Lowers your costs: The correct torque protects you from warranty claims. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

OVariable torque limit settings

| O - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - | | | | | | | |
|---|----------------|---------------|---------|-----|---------|---|--|
| Order-No. | Nm | # ## % | 0 | ₽ | | | |
| 26625 | 0,5-2,0 | 6 % | 3,8 | 131 | 30 | 1 | |
| 26626 | 0,8-5,0 | 6 % | 3,8 | 138 | 36 | 1 | |
| 26627 | 2,0-7,0 | 6 % | 3,8 | 142 | 41 | 1 | |
| Manufactured a | cc to IEC 6090 | O DIN FN | ISO 678 | RQ | • | | |




for torque screwdriver with long handle

| Order-No. | | | | |
|-----------|-------|-----|----|---|
| | | | - | |
| | 26864 | 146 | 90 | 1 |





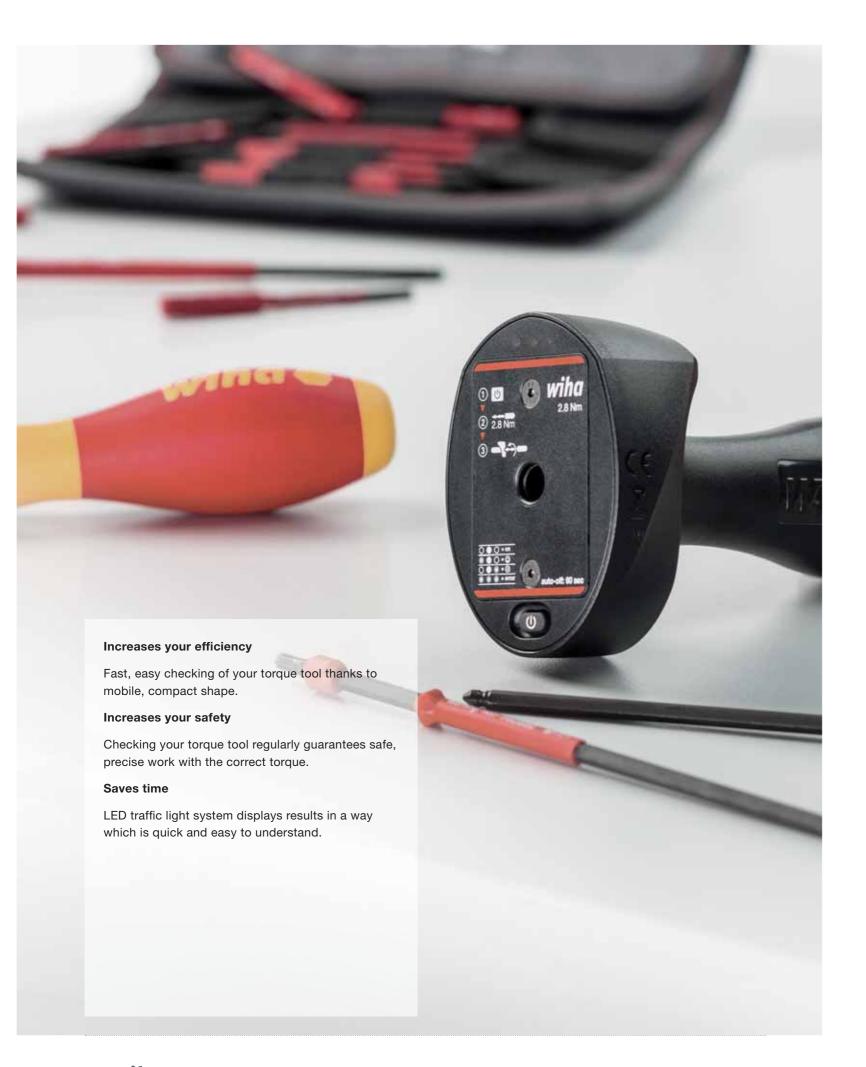













Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. Saves time: LED traffic light system displays results in a way which is quick and easy to understand. Increases your efficiency: Fast, easy checking of your torque tool thanks to mobile, compact shape.

with adapter blades and batteries in box

Order-No. Nm #/- % SB 2,8 2 x



INFOBOX:

Torque QuickCheck







Wiha Torque QuickCheck

- The Wiha torque screwdriver can quickly and easily test torque screwdrivers to check the precision of the configured torque value before each use.
- Checking tools regularly ensures reliable, precise work.
- The device offers user-friendly operation, clear test readings and easy to understand LED traffic light signals.
- Thanks to a compact, handy shape, it is the ideal companion when out on jobs.
- Suitable for all Torque Vario®-S and iTorque® torque screwdrivers whose torque range included 2.8 Nm.











Lowers your costs: The correct torque protects you from warranty claims. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Fully compatible with the Wiha slimBit system. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

| | | 29701 080 S4 |
|-------------|---|--------------|
| Order-No |). | ** |
| 41476 | | 1 |
| | 1 x 0,8 Nm | |
| (#) | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| | 1 x SoftFinish® electric screwdriver handle | |
| Manufacture | ed acc. to IEC 60900. | |

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

| | | 29701 200 S4 |
|--------------|---|--------------|
| Order-No. | | 3 |
| 41477 | | 1 |
| | 1 x 2,0 Nm | |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| | 1 x SoftFinish® electric screwdriver handle | |
| Manufactured | Laco to IEC 60900 | |

with slimVario® holder and SL/PZ slimBits, 4-pcs. in blister pack

| | | 29701 280 S4 |
|--------------|---|--------------|
| Order-No. | | 3 |
| 41478 | | 1 |
| | 1 x 2,8 Nm | |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| | 1 x SoftFinish® electric screwdriver handle | |
| Manufactured | acc. to IEC 60900. | |















Lowers your costs: The correct torque protects you from warranty claims. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Fully compatible with the Wiha slimBit system. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits and slimVario® holder, 5-ncs, in blister pack

| IOI SIIIID | its and similation noider, 5-pcs. in blister pack | 29701 S |
|------------|---|---------|
| Order-No. | 8 | |
| 41479 | 1 | |
| | 1 x 0,8 Nm / 1 x 2,0 Nm / 1 x 2,5 Nm / 1 x 2,8 Nm / 1 x | 4,0 Nm |

Manufactured acc. to IEC 60900.








Lowers your costs: Torque tool extension for LiftUp and slimVario® screwdriver sets. The correct torque protects you from warranty claims. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Fully compatible with the Wiha slimBit system. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

for slimBits and slimVario® holder in blister

| for slimBits and slimVario® holder in blister | | | | | |
|---|------------|---------------|----------|-----|---|
| Order-No. | Nm | */ 3 % | = | † | |
| 41341 | 0,8 | 10 % | 59 | 5,5 | 1 |
| 41342 | 2,0 | 10 % | 59 | 5,5 | 1 |
| 41343 | 2,5 | 10 % | 59 | 5,5 | 1 |
| 41344 | 2,8 | 10 % | 59 | 5,5 | 1 |
| 41345 | 4,0 | 10 % | 59 | 5,5 | 1 |
| Manufactured a | acc. to IE | EC 60900. | | | |





| | - AaAam |
|------------------------|--------------|
| lectric torque adapter | VARIO FAMILY |
| ₄1 ^{***} | wihas |
| | |

slimBit electric bit set











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Facilitates handling: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits – easily taken directly from the belt. Facilitates handling: Compact slimBit box with easy access and an optimal view of profiles. Convenient safe storage of 12 slimBits - easily taken directly from the belt. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

TORX®, TORX PLUS®, 12-pcs. in SlimBit box

| Order-No. | | |
|------------|--------------------------------------|------------------------------|
| 43161 | | 6 |
| • | 1 x 6IP• / 1 x 7IP• / 1 x 8IP• / 1 | x9IP• / 1 x 10IP• / 1 x 15IP |
| (*) | 1 x T6• / 1 x T7• / 1 x T8• / 1 | x T9• / 1 x T10• / 1 x T15 |
| | 1 x slimBit box leer 2 Stk. mit Gürt | telhalter |

no slim version

Manufactured acc. to IEC 60900.

2831 Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 12-pcs. in SlimBit box

| | 28 | 31 |
|-----------|--|----|
| Order-No. | | |
| 43162 | 6 | |
| \ominus | 1 x 3,5 / 1 x 5,5 | |
| ⊕ | 1 x PH1 / 1 x PH2 | |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |
| | 1 x T10• / 1 x T15 / 1 x T20 / 1 x T25 | |
| | 1 x slimBit box leer 2 Stk. mit Gürtelhalter | |
| | | |

Manufactured acc. to IEC 60900.

INFOBOX: slimBit box



slimBit box

- Compact slimBit box with easy access and an optimal view of profiles.
- Suitable for storing Wiha slimBits. Ideal for mobile use.
- Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.











slimBit electric bit set











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Facilitates handling: Compact slimBit box with easy access and an optimal view of profiles. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| Slotted, 6-pcs. in SlimBit box 2831 | | | | | |
|--|-----------------------------|----------|--|--|--|
| Order-No | | 3 | | | |
| 43152 | | 6 | | | |
| Θ | 1x2,0• / 1x2,5• / 1x3,5 / 1 | | | | |
| no slim version Manufactured acc. to IEC 60900. | | | | | |

TORX®, 6-pcs. in SlimBit box

| Order-No. | | *** |
|------------|----------------------------------|---------------------------|
| 43153 | | 6 |
| (*) | 1 x T8• / 1 x T9• / 1 x T10• / 1 | x T15 / 1 x T20 / 1 x T25 |

no slim version

Manufactured acc. to IEC 60900.

TORX®, 6-pcs. in SlimBit box

| Order-No. | | | | | | | | | | |
|-------------------------------|---------|--------|------|--|------|------|---|---|------|---|
| 43154 | | | | | | 6 | | | | |
| ③ | 1 x T6∙ | | | | | Г10• | / | 1 | x T1 | 5 |
| no slim vers Manufactured | | 60900. | | | | | | | | |

TORX PLUS®, 6-pcs. in SlimBit box

| Order-No. | | 3 |
|--------------|------------------------------------|----------|
| 43155 | | 6 |
| • | 1 x 6IP• / 1 x 7IP• / 1 x 8IP• / 1 | |
| no slim vers | ion | |

Hex, 6-pcs. in SlimBit box

| | pes. III Sililibit box | 2831 |
|-------------------------|----------------------------------|----------|
| Order-No | 0. | 3 |
| 43156 | | 6 |
| | 1x2• / 1x2,5 / 1x3 / 1x4 / 1 | |
| no slim v Manufactur | ersion red acc. to IEC 60900. | |

| Order-No |). | ** |
|-----------|--|-----------|
| 43157 | | 6 |
| \ominus | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |

Slotted, PlusMinus/Pozidriv 6-pcs. in SlimBit box

| - | Plusiminus/Poziuriv o-pcs. iii Siiiiibit box | | 283 |
|----------|--|---|-----|
| Order-No | | | |
| 43158 | | 6 | |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 | | |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 | | |

| Order-No |). | |
|----------------|---------------------|---|
| 43160 | | 6 |
| Θ | 1 x 2,0• / 1 x 2,5• | |
| (1) | 1 x PH0• / 1 x PH1 | |
| ₩ | 1 x PZ0• / 1 x PZ1 | |

| | | 2031 |
|----------------------------------|--------------------------------|------|
| Order-No. | | |
| 43156 | | 6 |
| | 1 x 2• / 1 x 2,5 / 1 x 3 / 1 x | |
| no slim vers | sion | |



| \Box | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 | | |
|--|---|---|--|
| • | 1 x SL/PZ1 / 1 x SL/PZ2 | | |
| no slim Manufact | version ured acc. to IEC 60900. | | |
| Slotted | d, Phillips 6-pcs. in SlimBit box | | |
| Order-N | No. | | |
| 43159 | | 6 | |
| \Box | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 | | |
| | | | |
| no slim Manufact | 1 x PH1 / 1 x PH2 version ured acc. to IEC 60900. | | |
| • no slim Manufact | 1 x PH1 / 1 x PH2 version ured acc. to IEC 60900. d, Phillips, Pozidriv 6-pcs. in SlimBit box | | |
| • no slim Manufact Slotted Order-N | 1 x PH1 / 1 x PH2 version ured acc. to IEC 60900. d, Phillips, Pozidriv 6-pcs. in SlimBit box No. | 6 | |
| • no slim Manufact Slotted Order-N 43160 | 1 x PH1 / 1 x PH2 version ured acc. to IEC 60900. d, Phillips, Pozidriv 6-pcs. in SlimBit box No. 1 x 2,0• / 1 x 2,5• | | |
| • no slim Manufact Slotted Order-N 43160 | 1 x PH1 / 1 x PH2 version ured acc. to IEC 60900. d, Phillips, Pozidriv 6-pcs. in SlimBit box No. 1 x 2,0• / 1 x 2,5• 1 x PH0• / 1 x PH1 | | |
| • no slim Manufact Slotted Order-N 43160 — | 1 x PH1 / 1 x PH2 version ured acc. to IEC 60900. d, Phillips, Pozidriv 6-pcs. in SlimBit box No. 1 x 2,0• / 1 x 2,5• | | |











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| ⊖ Slotted | | | | | | 283110 |
|------------------|-----------|----|-------------|------------|------------|--------|
| Order-No. | \ominus | mm | \ominus ; | • ‡ | max. Nm | |
| 43114 | 1,5• | 75 | 0,4 | 6.0 | 0,4 | 5 |
| 43115 | 2,0• | 75 | 0,4 | 6.0 | 0,4 | 5 |
| 34578 | 2,5• | 75 | 0,4 | 6.0 | 0,4 | 5 |
| 34579 | 3,0• | 75 | 0,5 | 6.0 | 0,6 | 5 |
| 41159 | 3,5 | 75 | 0,6 | 6.0 | 1,4 | 5 |
| 34580 | 4,0 | 75 | 0,8 | 6.0 | 2,5 | 5 |
| 34581 | 5,5 | 75 | 1,0 | 6.0 | 3,8 | 5 |
| 34582 | | 75 | | | 5,5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

⊕ Phillips

| | | | | | 2001 |
|-----------|---------------|----|------------|------------|------|
| Order-No. | ** | mm | • ‡ | max. Nm | 3 |
| 43116 | PH0∙ | 75 | 6,0 | 0.4 | 5 |
| 34583 | PH1 | 75 | 6,0 | 3.8 | 5 |
| 34584 | PH2 | 75 | 6,0 | 5.5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

Pozidriv

| Order-No. | ₩ | mm | • ‡ | max. Nm | 8 |
|-----------|------|----|------------|------------|---|
| 43117 | PZ0∙ | 75 | 6,0 | 0.5 | 5 |
| 34585 | PZ1 | 75 | 6,0 | 3.8 | 5 |
| 34586 | PZ2 | 75 | 6,0 | 5.5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

PlusMinus/Phillips

| Order-No. | ⊕ | ı √→ ı mm | • ‡ | max. Nm | 3 |
|----------------|------------------|-------------------------|------------|------------|----------|
| 34587 | SL/PH1 | 75 | 6,0 | 3.8 | 5 |
| 34588 | SL/PH2 | 75 | 6,0 | 5.5 | 5 |
| Manufactured a | acc. to IEC 6090 | 0. | | • | |

| ₱ PlusMinus/Pozidriv 28 | | | | | | | |
|---------------------------------|--------|----|------------|------------|----------|--|--|
| Order-No. | ₩ | mm | • ‡ | max. Nm | 3 | | |
| 34589 | SL/PZ1 | 75 | 6,0 | 3.8 | 5 | | |
| 34590 | SL/PZ2 | 75 | 6,0 | 5.5 | 5 | | |
| Manufactured acc. to IEC 60900. | | | | | | | |

★TORX®

| _ | | | | | 20011 |
|-----------|------|----|------------|------------|-------|
| Order-No. | | mm | ● ‡ | max. Nm | 8 |
| 43140 | T5• | 75 | 6,0 | 0.4 | 5 |
| 43141 | T6• | 75 | 6,0 | 0.4 | 5 |
| 43142 | T7• | 75 | 6,0 | 0.4 | 5 |
| 35506 | T8• | 75 | 6,0 | 1.3 | 5 |
| 41160 | T9• | 75 | 6,0 | 1.3 | 5 |
| 35507 | T10• | 75 | 6,0 | 3.8 | 5 |
| 35508 | T15 | 75 | 6,0 | 5.0 | 5 |
| 35509 | T20 | 75 | 6,0 | 5.5 | 5 |
| 36071 | T25 | 75 | | 5.5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

● TORX PLUS®

| Order-No. | | mm | • ‡ | max. Nm | |
|-----------|------|----|------------|------------|---|
| 43143 | 5IP• | | | 0.5 | 5 |
| 43144 | | 75 | 6 | 0.8 | 5 |
| 43145 | 7IP• | 75 | 6 | 1.3 | 5 |
| 43146 | 8IP• | 75 | 6 | 2.0 | 5 |
| 43147 | 9IP• | 75 | 6 | 3.0 | 5 |
| 43148 | | 75 | 6 | 4.5 | 5 |
| 43149 | 15IP | 75 | - | | 5 |
| 43150 | 20IP | 75 | 6 | 5.5 | 5 |
| | | 75 | | | 5 |

283112

| Square | | | | | | 283117 |
|---------------------------------|----|-----|----|------------|------------|----------|
| Order-No. | | | mm | • ‡ | max. Nm | 3 |
| 35510 | #1 | 2,3 | 75 | 6.0 | 5,5 | 5 |
| 35511 | #2 | 2,8 | 75 | 6.0 | 5,5 | 5 |
| Manufactured acc. to IEC 60900. | | | | | | |

| • | | | | | 283118 |
|-----------------------------------|------|----|------------|------------|----------|
| Order-No. | • | mm | • ‡ | max. Nm | ₽ |
| 37222 | 1,5• | 75 | 6,0 | 0.9 | 5 |
| 37223 | 2• | 75 | 6,0 | 1.8 | 5 |
| 37224 | 2,5 | 75 | 6,0 | 3.8 | 5 |
| 37147 | 3 | 75 | 6,0 | 5.5 | 5 |
| 37225 | 4 | 75 | 6,0 | 5.5 | 5 |
| 37226 | 5 | 75 | 6,0 | 5.5 | 5 |
| 37227 | 6 | 75 | 6,0 | 5.5 | 5 |
| no slim versi | | | | | |

















Increases your efficiency: Fully compatible with the Wiha slimBit system. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

○ for slimBits

| | | | | | | 20100 |
|---|------------------|---|------------|---|------------|---|
| | Order-No. | 0 | • ‡ | l ∢ → l mm | ф □ | 8 |
| 3 | 35870 | 6 | 3,8 | 170 | 13 | 10 |
| | Manufactured acc | | | *************************************** | | *************************************** |

Increases your efficiency: Adapter allows users to fasten with a nut driver and TorqueVario®-S electric. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

☐for 1/4" nut driver

| | | | | | 20100 |
|----------------|------|------------|-----|----|---|
| Order-No. | | • 1 | mm | ₽ | 8 |
| 43128 | 1/4" | 0,0 | 178 | 12 | 10 |
| Manufactured a | | | | | *************************************** |



Insulated nut driver insert







Insulated nut driver insert





1

Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

| 1/4" | hexagon | head |
|-------------------|-----------|-------|
|) I/ T | IIEAayuii | IIEau |

| | | | 7209NS |
|--------------|-----------|-----------|--------|
| Order-No. | 0 | ₩m | |
| 43088 | 4 | 42 | 1 |
| 43089 | 5 | 42 | 1 |
| 43090 | 5,5 | 42 | 1 |
| 43091 | 6 | 42 | 1 |
| 43092 | 7 | 42 | 1 |
| 43093 | 8 | 42 | 1 |
| 43094 | 9 | 42 | 1 |
| 43095 | 10 | 42 | 1 |
| 43096 | 11 | 42 | 1 |
| 43097 | 12 | 42 | 1 |
| 43098 | 13 | 42 | 1 |
| 43099 | 14 | 42 | 1 |
| Manufactured | according | to EN/IEC | 60900. |

Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

43086

43087

27 55

32 55

| ○1/2" hex | cagon | head | 7208NS |
|-----------|-------|------|--------|
| Order-No. | 0 | ₩₩ | 8 |
| 43077 | 10 | 55 | 1 |
| 43078 | 11 | 55 | 1 |
| 43079 | 12 | 55 | 1 |
| 43080 | 13 | 55 | 1 |
| 43081 | 14 | 55 | 1 |
| 43082 | 17 | 55 | 1 |
| 43083 | 19 | 55 | 1 |
| 43084 | 22 | 55 | 1 |
| 43085 | 24 | 55 | 1 |





Torque screwdriver with T-handle TorqueVario®-S T electric







Meets your requirements: A variably settable torque covers a large application area. Lowers your costs: The correct torque protects you from warranty claims. Facilitates handling: Effortless and comfortable transmission of high torques thanks to T-handle with ComfortGrip. Increases your efficiency: The correct torque avoids damaging material and no follow-up work is necessary. Provides you with full protection: Torque blades tested at 10,000 V AC and approved for 1,000 V AC.

Variable torque limit settings

| | | | | | | 2000 |
|--|------|-------------|---|-------------|-------------|----------|
| Order-No. | Nm | # 4% | 0 | . A. | - 0‡ | * |
| 43177 | 5-14 | 6 | 6 | 56 | 120 | 1 |
| Manufactured acc. to IEC 60900. DIN EN ISO 6789. | | | | | | |

INFOBOX:





electric

Torque T-handle TorqueVario®-S T electric

- For controlled fastening in a large range of applications.
- Torque value is continuously adjustable thanks to the adjusting tool.
- More fastening power thanks to T-handle design.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.
- Certified individual item testing directly after on-site production.
- Broad selection of interchangeable blades







Increases your safety: Wiha slim interchangeable blades ensure unlimited and fully-insulated access to low-lying screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

TORX® for torque screwdriver with T-handle electric

| | | | | | 283795 |
|--------------|-----|-----|-------------|------------|--------|
| Order-No. | | mm | | max. Nm | 3 |
| 38931 | | 136 | 35 | 5,5 | 10 |
| 38932 | T20 | 136 | 35 | 10 | 10 |
| 38933 | T25 | 136 | 35 | 15 | 10 |
| 38934 | T27 | 136 | 35 | 15 | 10 |
| 38935 | T30 | 136 | 35 | 20 | 10 |
| 38936 | T40 | 136 | 35 | 20 | 10 |
| Manufactured | | | | | |

Hex for torque screwdriver with T-handle

| | | | | | 20379 |
|----------------|------|-----|-------------|------------|----------|
| Order-No. | left | mm | | max. Nm | 3 |
| 38918 | 3,0 | 136 | 35 | 5,5 | 10 |
| 38919 | 4,0 | 136 | 35 | 15 | 10 |
| 38920 | 5,0 | 100 | 35 | 20 | 10 |
| 38921 | 6,0 | 136 | 35 | 20 | 10 |
| Manufactured a | | | | | - |



| ······································ | | | |
|---|--|--|--|
| | | | |
| *************************************** | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| *************************************** | | | |
| | | | |





Increases your efficiency: Extensive interchangeable blade system saves you space. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

OHex nut driver for torque screwdriver with T-handle electric

| | | | | 283794 |
|--------------|------------|----------|------------|---|
| Order-No. | 0 | mm⊓ | max. Nm | |
| 38925 | 7,0 | 136 | 5 | 10 |
| 38926 | 8,0 | 100 | 10 | 10 |
| 38927 | 9,0 | 136 | 14 | 10 |
| 38928 | 10,0 | 136 | 17 | 10 |
| 38929 | 13,0 | 136 | 20 | 10 |
| 38930 | 17,0 | 136 | 20 | 10 |
| Manufactured | acc. to IE | C 60900. | | *************************************** |



for torque screwdriver with T-handle

| for torque screwariver with 1-handle | | | | |
|--------------------------------------|----|-----|---|--|
| Order-No. | ٠, | | * | |
| 28691 | 90 | 146 | 1 | |







All bits in the handle, always and everywhere.





Why make things complicated, when they can be compact? The practical Wiha LiftUp electric magazine bit holder accommodates up to six common insulated slimBits - and is therefore the ideal portable companion for every electrician. The bit magazine is unlocked at the touch of a button on the two rockers, and the slimBits can easily be removed and re-inserted. A reliably locked magazine prevents anything from being lost when on the move. The rotating cap is used to make working easier: Additional axial force can be exerted by pressing strongly with the hand against the cap, while rotating around the longitudinal axis with the other hand. Uncompromising safety is ensured in production and testing according to IEC 60900, VDE/GS certifi cation and individual part testing at 10,000 V AC.

The Wiha magazine bit holder LiftUp electric is available in two content variants (SL/PH or SL/PH/PlusMinus PZ)

Increases your efficiency

Wiha LiftUp electric, saves 75 % volume and 50 % less weight for 100 % efficiency.

Protects your health

No risk of injury, all blades stowed safely inside the handle.

Provides you with full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Increases your safety

Wiha slimBits grant unhindered, fully insulated access to deep lying screws.







Screwdriver with bit magazine LiftUp electric









Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protects your health: No risk of injury, all blades stowed safely inside the handle. Increases your efficiency: Wiha LiftUp electric saves 75% volume and 50% less weight for 100 % efficiency. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.







Slotted, Phillips with 6 slimBits

2831 09 020

| Order-No | | |
|--------------------------------|--|---|
| 38610 | | 5 |
| \ominus | 1 x 2,5• / 1 x 3,0 / 1 x 4,0 / 1 x 5,5 | |
| ⊕ | 1 x PH1 / 1 x PH2 | |
| no slim ve | red and to IEC 60000 | |

Pozidriv, PlusMinus/Pozidriv, slotted with 6 slimBits

2831 09 023

| Order-N | | |
|-----------|-------------------------------------|---|
| 41234 | | 5 |
| \ominus | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |
| ₩ | 1 x SL/PZ2 | |
| | version tured acc. to IEC 60900. | |



Screwdriver and bit set slimVario® screwdriver













Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

assorted 18-pcs. in bag

2831 T18

| Order-N | lo. | |
|-------------|--|---|
| 41231 | | 1 |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits | |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits | |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 | |
| ⊕ | 1 x PH1 / 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| * | 1 x T9• / 1 x T10• / 1 x T15 / 1 x T20 | |
| | 1x3 / 1x4 / 1x5 | |
| • no clim v | | |

no slim version

Manufactured acc. to IEC 60900.





Screwdriver and bit set slimVario® screwdriver











Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Slotted, Phillips, Pozidriv, 9-pcs. in bag

2831 T9 01

| Order-N | No. | 8 |
|--------------|--|---|
| 41232 | | 1 |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits | |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits | |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 | |
| 1 | 1 x PH1 / 1 x PH2 | |
| 1 | 1 x PZ1 / 1 x PZ2 | |

no slim version

Manufactured acc. to IEC 60900.

Slotted, Pozidriv, PlusMinus/Pozidriv, 9-pcs. in bag

2831 T9 02

| Order-N | No. |
|----------|--|
| 41233 | 1 |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits |
| 0 | 1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 |
| ₩ | 1 x PZ1 / 1 x PZ2 |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 |

no slim version

Manufactured acc. to IEC 60900.



|) | wiha 🏻 | | |
|---|-------------------|--|--|
| - | VV I I I CI (Who) | | |

Screwdriver and nut driver insert 1/4" set slimVario® electric













Simplifies your work: All tools securely arranged in a robust, orderly bag. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Protects your material: Fully insulated nut driver reduces the risk of short circuits.

mixed, 13-pcs. in folding bag

| mixed, | d, 13-pcs. in folding bag | 7209N |
|-----------|--|--|
| Order-N | r-No. | *** |
| 43467 | 7 | 1 |
| | 1 x SoftFinish® electric screwdriver handle for slimBits | |
| | 1 x slimVario® electric extension for slimBits | |
| | 1 x slimVario® electric adapter for 1/4" nut driver | - |
| \ominus | 1 x 3,5 / 1 x 5,5 | |
| 0 | 1 x 5 / 1 x 5,5 / 1 x 6 / 1 x 7 / 1 x 8 / 1 x 10 / 1 x 11 / 1 x 13 | - |
| Manufact | actured acc to IEC 60900 | ······································ |

wiha was 53



Screwdriver with bit holder set SoftFinish® slimVario® electric









Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

4-pcs. with slimBits

| Order-No | | 3 |
|-----------|--|----------|
| 43449 | | 5 |
| | 1 x Screwdriver with bit holder SoftFinish® slimVario® electric for slimBits | |
| \ominus | 1 x 5,5 | |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 | |

Screwdriver with bit holder set SoftFinish® electric slimVario®









Simplifies your work: Compact handle - maximum power. Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Protected work in constricted spaces. Increases your efficiency: Fully compatible with the Wiha slimBit system. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Stubby, 4-pcs.

SB 2831 0101

| Order-N | اه. |
|--------------|--|
| 41230 | 1 |
| 0 | Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits |
| Θ | 3,5 x 75 |
| 1 | PH2 x 75 |
| * | SL/PZ2 x 75 |
| | ured acc. to IEC 60900. |

54 wiha 🍩



Fine screwdriver set PicoFinish® slimVario® electric









Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Fully compatible with the Wiha slimBit system. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your precision: Sensitive working and controlled power transmission thanks to the slim handle with a soft grip. Particularly suitable for use with slimBit profiles.

4-pcs. with slimBits

| Order-N | |
|--------------|---|
| 43167 | 5 |
| | 1 x Fine screwdriver PicoFinish® slimVario® electric for slimBits |
| Θ | 1 x 2,0• |
| 1 | 1 x PH0∙ |
| 1 | 1 x PZ0• |
| • no olim | |

no slim version

Manufactured acc. to IEC 60900.









slimBit electric bit set










2831



TORX®, TORX PLUS®, 12-pcs. in SlimBit box

| Order-No. | ** |
|-----------|---|
| 43161 | 6 |
| • | 1 x 6IP• / 1 x 7IP • / 1 x 8IP• / 1 x 9IP• / 1 x 10IP• / 1 x 15IP |
| ③ | 1 x T6• / 1 x T7• / 1 x T8• / 1 x T9• / 1 x T10• / 1 x T15 |
| | 1 x slimBit box leer 2 Stk. mit Gürtelhalter |

no slim version

Manufactured acc. to IEC 60900.

2831 Slotted, Phillips, Pozidriv, PlusMinus/Pozidriv, TORX® 12-pcs. in SlimBit box

| Order-No | • | |
|--------------|--|---|
| 43162 | | 6 |
| \ominus | 1 x 3,5 / 1 x 5,5 | |
| ① | 1 x PH1 / 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 | |
| ₩ | 1 x SL/PZ1 / 1 x SL/PZ2 | |
| ③ | 1 x T10• / 1 x T15 / 1 x T20 / 1 x T25 | |
| ******* | 1 x slimBit box leer 2 Stk. mit Gürtelhalter | |

INFOBOX: slimBit box



slimBit box

- Compact slimBit box with easy access and an optimal view of profiles.
- Suitable for storing Wiha slimBits. Ideal for mobile use.
- Wiha slimBits ensure unrestricted and fully insulated access to low-lying screws.
- Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.







slimBit electric bit set

Slotted, 6-pcs. in SlimBit box











Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Facilitates handling: Compact slimBit box with easy access and an optimal view of profiles. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

2831

| - | | | 2031 |
|---|--|----------------------|--------|
| Order-No | • • | 3 | |
| 43152 | | 6 | |
| Θ | 1 x 2,0• / 1 x 2,5• / 1 x 3,5 / 1 x | (4,0 / 1 x 5,5 / 1 x | 6,5 |
| no slim ve Manufacture | ersion ed acc. to IEC 60900. | | |
| IVIAI IGIACIGI | 5d acc. to 120 00300. | | |
| | 6-pcs. in SlimBit box | | 2831 |
| Order-No |). | | |
| 43153 | | 6 | |
| * | 1 x T8• / 1 x T9• / 1 x T10• / 1 | x T15 / 1 x T20 / 1 | x T25 |
| no slim ve Manufactur | ersion ed acc. to IEC 60900. | | |
| TORYS | C. man, in Clima Did Is ass | | |
| | 6-pcs. in SlimBit box | | 2831 |
| Order-No | | | |
| 43154 | | 6 | |
| (*) | 1 x T6• / 1 x T7• / 1 x T8• / 1 x | T9• / 1 x T10• / 1 | x T15 |
| • no slim ve | | | |
| Manufactur | ed acc. to IEC 60900. | | |
| TORX P | LUS®, 6-pcs. in SlimBit box | | 2831 |
| Order-No |). | | |
| 43155 | | 6 | |
| • | 1 x 6IP• / 1 x 7IP• / 1 x 8IP• / 1 x | 9IP• / 1 x 10IP• / 1 | x 15IP |
| • no slim ve | | | |
| Manufactur | ed acc. to IEC 60900. | | |
| Hex, 6-p | ocs. in SlimBit box | | |
| Order-No | | S | 2831 |
| 43156 |). | | 2831 |
| |). | 6 | 2831 |
| | 1x2• / 1x2,5 / 1x3 / 1x4 / | | 2831 |
| no slim ve Manufacture | 1 x 2• / 1 x 2,5 / 1 x 3 / 1 x 4 / | | 2831 |
| | 1x2• / 1x2,5 / 1x3 / 1x4 / | | 2831 |
| Manufactur | 1 x 2• / 1 x 2,5 / 1 x 3 / 1 x 4 / | | 2831 |
| Manufactur | 1 x 2 • / 1 x 2,5 / 1 x 3 / 1 x 4 / resion ed acc. to IEC 60900. Pozidriv 6-pcs. in SlimBit box | | |

1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5

1 x PZ1 / 1 x PZ2

no slim version

Manufactured acc. to IEC 60900.

| Order-No | | | |
|----------------------------|---|----|-----|
| 43158 | | 6 | |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 | | |
| * | 1 x SL/PZ1 / 1 x SL/PZ2 | | |
| no slim ver Manufacture | sion d acc. to IEC 60900. | | |
| Slotted, | Phillips 6-pcs. in SlimBit box | | 283 |
| Order-No | | ** | |
| 43159 | | 6 | |
| Θ | 1 x 2,5• / 1 x 3,5 / 1 x 5,5 / 1 x 6,5 | | |
| ⊕ | 1 x PH1 / 1 x PH2 | | |
| no slim ver Manufacture | sion d acc. to IEC 60900. | | |
| Slotted, | Phillips, Pozidriv 6-pcs. in SlimBit bo | ох | 283 |
| | | | |
| Order-No | | 6 | |
| Order-No 43160 | | | |
| | 1 x 2,0• / 1 x 2,5• | | |
| 43160 | 1 x 2,0• / 1 x 2,5• 1 x PH0• / 1 x PH1 | | |
| 43160 O | 1 x 2,0• / 1 x 2,5• | | |











5



Increases your safety: Wiha slimBits ensure good, protected access to deep-set screws. Increases your efficiency: Extensive interchangeable blade system saves you space. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| \bigcirc Slotted | | | | | | 283110 |
|-------------------------------------|-----------|----|-------------|---|------------|--------|
| Order-No. | \ominus | mm | \ominus ; | • ‡ | max. Nm | |
| 43114 | 1,5• | | 0,4 | 6.0 | 0,4 | 5 |
| 43115 | 2,0• | 75 | 0,4 | 6.0 | 0,4 | 5 |
| 34578 | 2,5• | 75 | 0,4 | 6.0 | 0,4 | 5 |
| 34579 | 3,0• | 75 | 0,5 | 6.0 | 0,6 | 5 |
| 41159 | 3,5 | 75 | 0,6 | 6.0 | 1,4 | 5 |
| 34580 | 4,0 | 75 | 0,8 | 6.0 | 2,5 | 5 |
| 34581 | 5,5 | 75 | 1,0 | 6.0 | 3,8 | 5 |
| 34582 | 6,5 | 75 | 1,2 | 6.0 | 5,5 | 5 |
| no slim version | | | | *************************************** | | |

no slim version
 Manufactured acc. to IEC 60900.

\bigoplus Phillips

| Order-No. | ① | mm | • ‡ | max. Nm | *** |
|-----------|--------------|----|------------|------------|-----|
| 43116 | PH0∙ | 75 | 6,0 | 0.4 | 5 |
| 34583 | PH1 | 75 | 6,0 | 3.8 | 5 |
| 34584 | PH2 | 75 | 6,0 | 5.5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

⊕ Pozidriv

| Pozidriv | | | | | 283112 |
|-----------|------|----|------------|------------|--------|
| Order-No. | ₩ | mm | • ‡ | max. Nm | * |
| 43117 | PZ0∙ | 75 | 6,0 | 0.5 | 5 |
| 34585 | PZ1 | 75 | 6,0 | 3.8 | 5 |
| 34586 | PZ2 | 75 | 6,0 | 5.5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

⊕ PlusMinus/Phillips

| Order-No. | ⊕ | mm | © ‡ | max. Nm | * |
|-----------|----------|----|------------|------------|----------|
| 34587 | SL/PH1 | 75 | 6,0 | 3.8 | 5 |
| 34588 | SL/PH2 | 75 | 6,0 | 5.5 | 5 |

Manufactured acc. to IEC 60900.

PlusMinus/Pozidriv

| • | | | | | 28311 |
|----------------|-----------------|----|------------|---|---|
| Order-No. | ● | mm | • ‡ | max. Nm | 3 |
| 34589 | SL/PZ1 | 75 | 6,0 | 3.8 | 5 |
| 34590 | SL/PZ2 | 75 | 6,0 | 5.5 | 5 |
| Manufactured a | cc. to IEC 6090 | 0. | | *************************************** | *************************************** |

| TORX[®] | | | | | 283115 |
|---------------------------------|------|----|------------------------|------------|----------|
| Order-No. | | mm | $\textcircled{\sharp}$ | max. Nm | 3 |
| 43140 | T5• | 75 | 6,0 | 0.4 | 5 |
| 43141 | T6• | 75 | 6,0 | 0.4 | 5 |
| 43142 | T7• | 75 | 6,0 | 0.4 | 5 |
| 35506 | T8• | 75 | 6,0 | 1.3 | 5 |
| 41160 | T9• | 75 | 6,0 | 1.3 | 5 |
| 35507 | T10• | 75 | 6,0 | 3.8 | 5 |
| 35508 | T15 | 75 | 6,0 | 5.0 | 5 |
| 35509 | T20 | 75 | 6,0 | 5.5 | 5 |

no slim version

Manufactured acc. to IEC 60900.

T25 75 6,0 5.5

● TORX PLUS®

36071

| • TOTIX I | LUU | | | | 283 | | |
|-----------------------------------|-------|----|------------|------------|-----|--|--|
| Order-No. | | mm | • ‡ | max. Nm | | | |
| 43143 | 5IP• | 75 | 6 | 0.5 | 5 | | |
| 43144 | 6IP∙ | 75 | 6 | 8.0 | 5 | | |
| 43145 | 7IP• | 75 | 6 | 1.3 | 5 | | |
| 43146 | 8IP• | 75 | 6 | 2.0 | 5 | | |
| 43147 | 9IP• | 75 | 6 | 3.0 | 5 | | |
| 43148 | 10IP• | 75 | 6 | 4.5 | 5 | | |
| 43149 | 15IP | 75 | 6 | 5.5 | 5 | | |
| 43150 | 20IP | 75 | 6 | 5.5 | 5 | | |
| 43151 | 25IP | 75 | 6 | 5.5 | 5 | | |
| no slim versi | | | | * | | | |

no slim version

Manufactured acc. to IEC 60900.

283113

| Square | | | | | | 28311 |
|-----------|----|-----|----|------------|------------|----------|
| Order-No. | | | mm | • ‡ | max. Nm | 3 |
| 35510 | #1 | 2,3 | 75 | 6.0 | 5,5 | 5 |
| 35511 | #2 | 2,8 | 75 | 6.0 | 5,5 | 5 |

| Jilex | | | | | 283118 |
|----------------|----------|------------|------------|------------|--------|
| Order-No. | • | mm | © ‡ | max. Nm | 8 |
| 37222 | 1,5• | 75 | 6,0 | 0.9 | 5 |
| 37223 | 2• | 75 | 6,0 | 1.8 | 5 |
| 37224 | , - | 75 | - , - | | 5 |
| 37147 | - | 75 | -,- | | 5 |
| 37225 | 4 | 75 | 6,0 | 5.5 | 5 |
| 37226 | 5 | 75 | 6,0 | 5.5 | 5 |
| 37227 | 6 | 75 | 6,0 | 5.5 | 5 |
| no slim versio | n. Manut | factured a | cc. to IE | C 60900. | |







2831-08

Improved access: Deep-set screws can be reached easily. Provides you with full protection: Each tool individually tested at 10,000 V AC

Increases your efficiency: Adapter allows nut driver to be fastened with speedE® and slimVario® handles. Provides you with full and approved for 1,000 V AC.


protection: Each tool individually tested at 10,000 V AC and approved

for slimBits


| Order-No. | | mm | | 3 |
|-----------|---|------|------|---|
| 43292 | 6 | 69,5 | 13,3 | 6 |

for 1/4" nut driver

| Order-No. | 0 | ı←→ı mm | ‡□= | ₽ | ▣ | * |
|-----------|---|------------|------------|------|------|----------|
| 43139 | 6 | 59 | 1/4" | 12,4 | 1/4" | 6 |

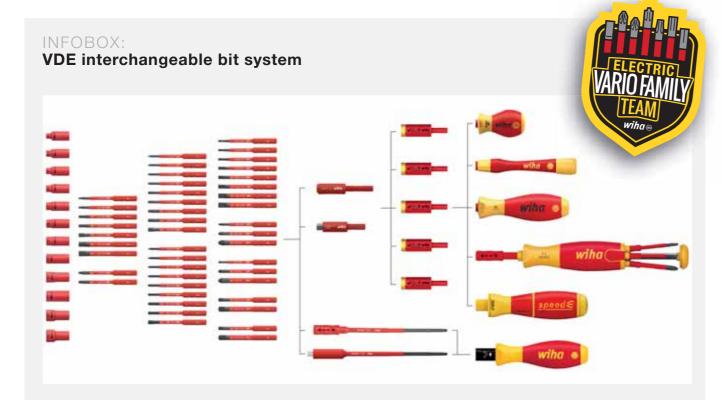

Can be used with these slimBits

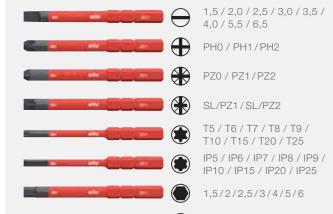

Robertson 1/2

VDE interchangeable bit system

- Compact VDE bit sets: holder + slimBit (length 75
- Wiha slimBits ensure good, protected access to deep-set screws.
- slimBits tested at 10,000 V AC and approved for 1,000 V AC.
- Space saved thanks to extensive interchangeable bit system and nut driver inserts.

VDE torque system


 Controlled tightening of electrical screw connections







Easier and protected access to deep-set screws.

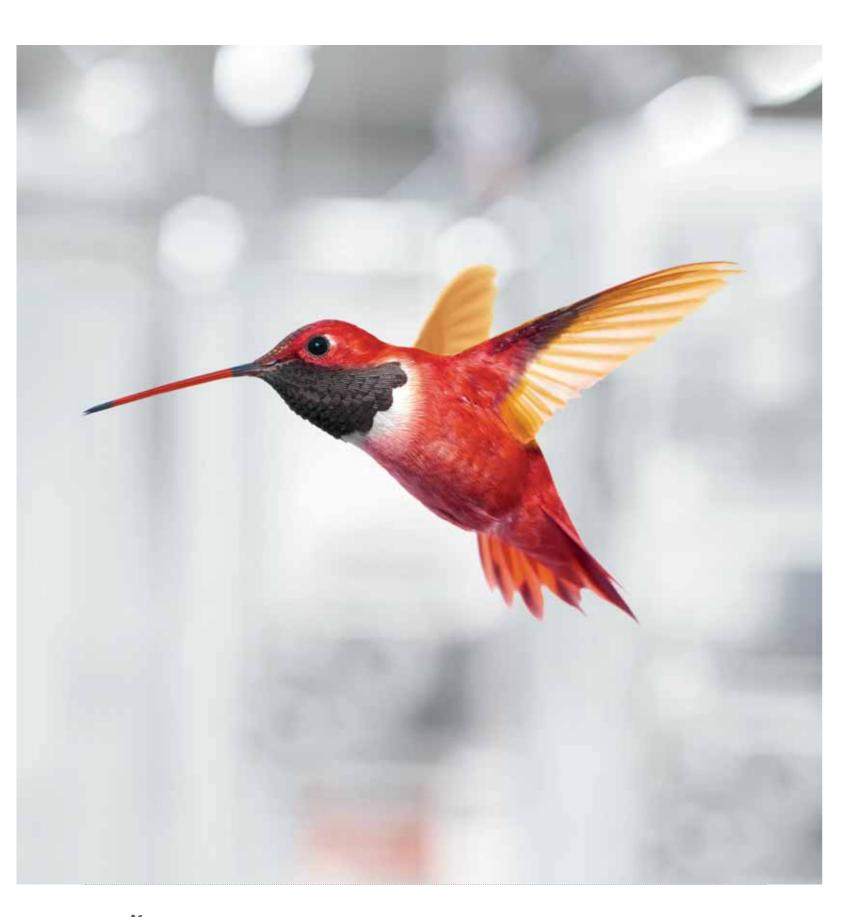



Wiha slimTECHNOLOGY enables blades to be up to 33 % slimmer due to the integrated insulation in the blade. Lowlying screw and spring elements in the critical working area can therefore be reached easily. The high-quality blade insulation guarantees safe work in on live parts up to 1,000 V AC/1,500 V DC. Additional safety is assured as each individual screwdriver is tested in a water bath at 10,000 V AC in accordance with IEC 60900.

Roll-off protection, the patented, SoftFinish® handle design that protects the hands and muscles from strain, and the unique handle-length concept for optimal balance between power and control all ensure healthier and more efficient

The system for every electrician. Available as a screwdriver or as an interchangeable bit system

Increases your efficiency

Unique Wiha handle-length concept for optimum balance of torque and control.

Protects your health

With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs.

• Provides you with full protection


Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

• Increases your safety

Wiha slim blades grant unhindered, fully insulated access to low lying screws.





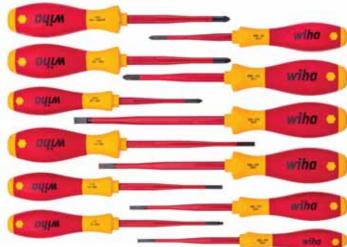


Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

assorted 12-pcs.

| | 3201 KI2 |
|------------|---|
| Order-N | 0. |
| 41003 | 1 |
| Θ | 3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 |
| ⊕ | PH1 x 80 / PH2 x 100 |
| ₩ | PZ1 x 80 / PZ2 x 100 |
| * | SL/PZ2 x 100 |
| (*) | T15 x 100 / T20 x 100 / T25 x 125 |

- therapists from the AGR.



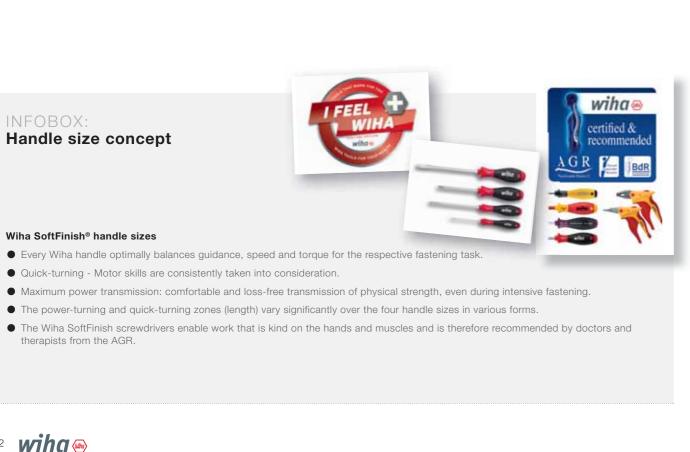



SoftFinish® electric slimFix









Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| Order-N | No. | |
|--|--|-------------------|
| 35389 | | 1 |
| Θ | 3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 | |
| 1 | PH1 x 80 / PH2 x 100 | |
| Manufact | turéd acc. to IEC 60900. | |
| Slotte | d, Pozidriv 6-pcs. | 3201 ZK6 |
| Order-1 | No. | 8 |
| 36455 | | 1 |
| \ominus | 3,5 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 | |
| 1 | | |
| Manufact | PZ1 x 80 / PZ2 x 100 fured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. | 3201 K601 |
| Manufact Slotte | tured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. | |
| Manufact | tured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. | 3201 K601 |
| Slotte Order-N 38362 | tured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. | 8 |
| Slotte | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. | 8 |
| Slotter Order-N 38362 | tured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 | |
| Manufact Slotter Order-N 38362 | tured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 | \$ |
| Slotter Order-N 38362 Manufact | tured acc. to IEC 60900. d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 | 1 |
| Slotter Order-N 38362 Manufact | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 tured acc. to IEC 60900. | 1 1 3251 K6 |
| Manufact Slotte Order-↑ 38362 ⊕ Manufact TORX® | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 tured acc. to IEC 60900. | 1 |
| Manufact Slotter Order-N 38362 | d, Phillips, PlusMinus/Pozidriv 6-pcs. No. 3,5 x 100 / 4,0 x 100 / 5,5 x 125 PH1 x 80 / PH2 x 100 SL/PZ2 x 100 tured acc. to IEC 60900. | 3251 K6 |





Screwdriver SoftFinish® electric slimFix









Increases your safety: Wiha slim blades ensure unlimited, protected access to deep-set screws. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| | | | | | | - |
|----------------|-----------|-----------|-------------|-------|-------------|----------|
| Order-No. | \ominus | → | \ominus ; | mm | | 3 |
| 35446 | 3,5 | 100 | 0,6 | 204 | 23 | 10 |
| 35390 | 4,0 | 100 | 0,8 | 211 | 30 | 10 |
| 35501 | 4,5 | 125 | 1,0 | 236 | 30 | 10 |
| 35391 | 5,5 | 125 | 1,0 | 243 | 36 | 10 |
| 35392 | 6,5 | 150 | 1,2 | 268 | 36 | 10 |
| DINLISO 3380 I | Manufac | tured acc | to IFC | 60000 | | |

⊕ Phillips

| Order-No. | | = | | - <u></u> | 3 |
|--------------|----------|----------|-----|------------------|---|
| 35393 | PH1 | 80 | 191 | 30 | 10 |
| 35394 | PH2 | 100 | 218 | 36 | 10 |
| DINLICO 0764 | DLI Moni | | | | *************************************** |

Pozidriv

| Order-No. | ₩ | ≕ | mm | - | 8 | | |
|--|-----|----------|-----|----------|----|--|--|
| 35395 | PZ1 | 80 | 191 | 30 | 10 | | |
| 35396 | | 100 | 218 | 36 | 10 | | |
| DIN ISO 8764-PZ. Manufactured acc. to IEC 60900. | | | | | | | |

⊕ PlusMinus/Phillips

| Order-No. | ⊕ | ≂ ■ | mm | - ÷ | 3 | |
|---------------------------------|----------|------------|-----|------------|----------|--|
| 35502 | SL/PH1 | 80 | 191 | 30 | 10 | |
| 35503 | SL/PH2 | 100 | 218 | 36 | 10 | |
| Manufactured acc. to IEC 60900. | | | | | | |

PlusMinus/Pozidriv

| Ψ | | | | | 3281 | |
|---------------------------------|--------|----------|-----|------------|----------|--|
| Order-No. | ₩ | ≕ | mm | - ÷ | 3 | |
| 36329 | SL/PZ1 | 80 | 191 | 30 | 10 | |
| 36330 | SL/PZ2 | 100 | | 36 | 10 | |
| Manufactured acc. to IEC 60900. | | | | | | |

3201 **★ TORX® Tamper Resistant (with hole)**

| • | | | | , | 3251 TR |
|--------------|-------------|----------|-----|-------------|---------|
| Order-No. | | = | mm | | * |
| 41141 | T10H | 100 | 204 | 23 | 10 |
| 41142 | T15H | 100 | 211 | 30 | 10 |
| 41143 | T20H | 100 | 211 | 30 | 10 |
| 41144 | T25H | 125 | 243 | 36 | 10 |
| 41145 | T27H | 125 | 243 | 36 | 10 |
| 41146 | T30H | 125 | 243 | 36 | 10 |
| 41147 | T40H | 150 | 268 | 36 | 10 |
| Manufactured | acc. to IE0 | C 60900 | | | |

★TORX®

3211

3241

3271

| | | | | | 0201 |
|---------------|----------|-----------|------------|---------------------|---|
| Order-No. | | == | mm | — <u> </u> → | 8 |
| 36536 | T10 | 100 | 204 | 23 | 10 |
| 36537 | T15 | 100 | 211 | 30 | 10 |
| 36538 | T20 | 100 | 211 | 30 | 10 |
| 36539 | T25 | 125 | 243 | 36 | 10 |
| 36540 | T27 | 125 | 243 | 36 | 10 |
| 36541 | T30 | 125 | 243 | 36 | 10 |
| 36542 | T40 | 150 | 268 | 36 | 10 |
| DIN ISO 8764- | PH. Manı | ufactured | acc. to Il | EC 60900. | *************************************** |

Square

| <u> </u> | | | | | | 358 |
|----------------|-----------|---------|----------|-----|------------------|---|
| Order-No. | | | = | mm | — <u></u> | 3 |
| 35504 | | | | 211 | | 10 |
| 35505 | #2 | 2,8 | 125 | 243 | 36 | 10 |
| Manufactured a | cc. to IE | C 60900 | | | | *************************************** |



Screwdriver set SoftFinish® electric







Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| Slotted, Phillips 7-pcs. | 320N K |
|--------------------------|--------|
| Order-No. | *** |
| 00834 | 1 |

2,5 x 75 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150 PH1 x 80 / PH2 x 100

Voltage tester SoftFinish® single-pole, 110-250 volts Slotted transparent, with push-on clip

Manufactured acc. to IEC 60900.

Slotted, Phillips 6-pcs. 320N K6 Order-No. 00833 3,0 x 100 / 4,0 x 100 / 5,5 x 125 / 6,5 x 150

PH1 x 80 / PH2 x 100 Manufactured acc. to IEC 60900.

Slotted, Pozidriv 6-pcs.

| Order-No. | |
|--------------|--|
| 25477 | 1 |
| Θ | 2,5 x 75 / 3,5 x 100 / 4,5 x 125 / 5,5 x 125 |
| ₩ | PZ1 x 80 / PZ2 x 100 |
| Manufactured | d acc. to IEC 60900. |





Screwdriver SoftFinish® electric







327

Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.


| ⊖ Slotted | | | | | | 320N |
|---|-----------|----------|-----|-----|-----------|----------|
| Order-No. | \ominus | = | ⊖; | mm⊓ | — <u></u> | ₽ |
| 00819 | 2,0 | 60 | 0,4 | 164 | 23 | 10 |
| 00820 | 2,5 | 75 | 0,4 | 179 | 23 | 10 |
| 00821 | 3,0 | 100 | 0,5 | 204 | 23 | 10 |
| 00822 | 3,5 | 100 | 0,6 | 204 | 23 | 10 |
| 00823 | 4,0 | 100 | 0,8 | 211 | 30 | 10 |
| 00824 | 4,5● | 125 | 1,0 | 236 | 30 | 10 |
| 00825 | 4,5● | 175 | 1,0 | 286 | 30 | 5 |
| 31863 | 4,5 | 200 | 1,0 | 311 | 30 | 5 |
| 00826 | 5,5 | 125 | 1,0 | 243 | 36 | 10 |
| 00827 | 5,5∙ | 175 | 1,0 | 293 | 36 | 5 |
| 00828 | 6,0• | 150 | 1,2 | 268 | 36 | 10 |
| 00829 | 6,5 | 150 | 1,2 | 268 | 36 | 10 |
| 00830 | 8,0 | 175 | 1,2 | 299 | 41 | 10 |
| 00831 | 8,0 | 175 | 1,6 | 299 | 41 | 10 |
| 00832 | 10,0• | 200 | 1,6 | 324 | 41 | 5 |
| Additional dir Manufactured | | | | | | |

⊕ Phillips

| ⊕ Phillips | | | | | 321N |
|--------------|--------------|----------|-----|-------------|------|
| Order-No. | ① | ≕ | mm | | 8 |
| 00846 | PH0 | 60 | 164 | 23 | 10 |
| 00847 | PH1 | 80 | 191 | 30 | 10 |
| 00848 | PH2 | 100 | 218 | 36 | 10 |
| 00849 | PH3 | 150 | 268 | 41 | 10 |
| 00850 | PH4 | 200 | 318 | 41 | 5 |
| Manufactured | acc. to IE | C 60900 | | | |

⊕ Pozidriv

| Order-No. | ₩ | = | mm | | 3 | | |
|---------------------------------|-----|----------|-----|-------------|----------|--|--|
| 00877 | PZ0 | 60 | 164 | 23 | 10 | | |
| 00878 | PZ1 | 80 | 191 | 30 | 10 | | |
| 00879 | PZ2 | 100 | 218 | 36 | 10 | | |
| 08800 | PZ3 | 150 | 324 | 41 | 5 | | |
| Manufactured acc. to IEC 60900. | | | | | | | |



| Order-No. | ⊕ | _ | | - | | | |
|---------------------------------|----------|-----|-----|--------------|----|--|--|
| 30716 | SL/PH1 | 80 | 191 | 30 | 10 | | |
| 30715 | SL/PH2 | 100 | 218 | 36 | 10 | | |
| Manufactured acc. to IFC 60900. | | | | | | | |

PlusMinus/Pozidriv

| | | | | | 320 |
|-----------|-----------------|---------|-----|------------|-----|
| Order-No. | ₩ | ≂ | mm | - → | |
| 30700 | SL/PZ1 | 80 | 191 | 30 | 10 |
| 30701 | SL/PZ2 | 100 | 218 | 36 | 10 |
| | cc. to IEC 6090 | | | | |

★TORX®

| | | | | | 020 | | |
|---------------------------------|----|---------|-----|--------------|-----|--|--|
| Order-No. | | | mm | _ | 8 | | |
| 03760 | T5 | 60 | 164 | 23 | 10 | | |
| 03761 | T6 | 60 | 164 | 23 | 10 | | |
| 03762 | T7 | 60 | 164 | 23 | 10 | | |
| 00881 | T8 | 60 | 164 | 23 | 10 | | |
| 00882 | Т9 | 60 | 164 | 23 | 10 | | |
| Manufactured acc. to IEC 60900. | | | | | | | |

Hex

| Hex | | | | | 323N |
|--------------|------------|---------|-----|--------------|---|
| Order-No. | • | ⇌■ | mm | _ | *************************************** |
| 30361 | 2,5 | 75 | 179 | 23 | 10 |
| 30362 | 3,0 | 75 | 179 | 23 | 10 |
| 30363 | 4,0 | 75 | 186 | 30 | 10 |
| 30364 | 5,0 | 75 | 186 | 30 | 10 |
| 30365 | 6,0 | 100 | 218 | 36 | 10 |
| 30366 | 8,0 | 100 | 218 | 36 | 10 |
| Manufactured | acc. to IE | C 60900 | | | |

Square

324

| Square | | | | | | 358N |
|-------------------------|-----------------|----------------|----------|-----|------------------|------|
| Order-No. | | | = | mm | − <u></u> | 3 |
| 32396 | #1 | 2,3 | 100 | | 30 | 10 |
| 32397 Manufactured a | #2 cc. to IE | 2,8 C 60900 | 150 | 268 | 36 | 10 |









Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Hexagon nut driver 5-pcs.

Manufactured acc. to IEC 60900.

| Hexagon nut driver 5-pcs. | 322 K5 |
|---------------------------|----------|
| Order-No. | - |

29466 0 5,5 x 125 / 7 x 125 / 8 x 125 / 10 x 125 / 13 x 125







Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

OHex nut driver

| - 0 | 200 | |
|-----|-----|--|
| C |) | |

| Order-No. | 0 | ⇌■ | mm | - ÷ | \Rightarrow | |
|----------------|------------|---------|-----|------------|---------------|----|
| 00853 | 4 | 125 | 236 | 30 | 10,2 | 10 |
| 00855 | 5 | 125 | 236 | 30 | 11,2 | 10 |
| 00856 | 5,5 | 125 | 236 | 30 | 11,2 | 10 |
| 00857 | 6 | 125 | 236 | 30 | 12,2 | 10 |
| 00858 | 7 | 125 | 243 | 36 | 14,5 | 10 |
| 00859 | 8 | 125 | 243 | 36 | 15,2 | 10 |
| 00860 | 9 | 125 | 243 | 36 | 16,0 | 10 |
| 00861 | 10 | 125 | 243 | 36 | 17,2 | 10 |
| 00862 | 11 | 125 | 243 | 41 | 19,2 | 10 |
| 00863 | 12 | 125 | 243 | 41 | 20,2 | 10 |
| 00864 | 13 | 125 | 243 | 41 | 22,2 | 10 |
| 00865 | 14 | 125 | 243 | 41 | 23,2 | 10 |
| 00866 | 15 | 125 | 243 | 41 | 25,2 | 10 |
| 00867 | 16 | 125 | 243 | 41 | 25,2 | 10 |
| 00868 | 17 | 125 | 243 | 41 | 27,2 | 10 |
| Manufactured a | acc. to IE | C 60900 | • | | | |

INFOBOX: Combination profiles





PlusMinus.

- The special PlusMinus/Pozidriv profile is ideal for PlusMinus terminal screws.
- The combination profile reduces slipping out and guarantees a higher torque transmission.









227P

Simplifies your work: With a practical plastic holder to hang up or stand on a surface. **Facilitates handling:** Extra-long rotating cap ensures optimum feed. **Increases your efficiency:** Screwdriver handle controlled power transmission thanks to the slim handle with a soft size concept for an optimal balance between precision and control. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. Increases your precision: Sensitive working and controlled power transmission thanks to the slim — Slotted handle with a soft grip.

Slotted, Phillips, 6 pcs. with holder

| 42989 | | 1 |
|--------------|---|---|
| \ominus | 2,0 x 50 / 2,5 x 65 / 3 x 65 / 1,5 x 50 | |
| ① | PH00 x 50 / PH0 x 65 | |
| | | |

Fine screwdriver PicoFinish electric





2270P

2271P

Facilitates handling: Extra-long rotating cap ensures optimum feed. Increases your efficiency: Screwdriver handle size concept for an optimal balance between precision and control. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved

| Order-No. | \ominus | = | •1 | mm | | * |
|-----------|-----------|----------|-----|-----|-------------|----------|
| 42374 | 1,5 | 50 | 2,0 | 152 | 18 | 10 |
| 42375 | 2,0 | 50 | 2,0 | 152 | 18 | 10 |
| 42376 | 2,5 | 65 | 2,5 | 167 | 18 | 10 |
| 42377 | 3 | 65 | 3 | 167 | 18 | 10 |
| 42471 | 3,5 | 65 | 3,5 | 167 | 18 | 10 |
| | | | | | | |

Phillips

| Order-No. | ** | = = | •1 | mm | ÷ | 3 |
|-----------|---------------|------------|----|-----|---------------|----------|
| 42379 | PH00 | 50 | 2 | 152 | 18 | 10 |
| 42378 | PH0 | 65 | 3 | 167 | 18 | 10 |
| 42380 | PH1 | 65 | 4 | 167 | 18 | 10 |

INFOBOX:

PicoFinish electric



Wiha PicoFinish electric: The VDE-GS tested precision screwdriver.


- The smooth-running turn-cap enables fast turning.
- Imprint with the screw symbol and sizes eases recognition.



| wiha 🍩 | | | |
|--------|--|--|--|

L-key with T-handle electric











Simplifies your work: More power when fastening thanks to the leverage from the T-handle design **Increases your efficiency:** Handle size concept for an optimum balance between torque and control Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Simplifies your work: More power when fastening thanks to the leverage from the T-handle design **Increases your efficiency:** Handle size concept for an optimum balance between torque and control **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Hex

| • | | | | | | 3341 |
|-----------|---|----------|----------------------|-------------|-------------|----------|
| Order-No. | • | ₩ | \rightleftharpoons | — ≬‡ | → . | 3 |
| 27928 | 4 | 150 | 176 | 80 | 26 | 10 |
| 27929 | 5 | 150 | 182 | 100 | 32 | 10 |
| 27930 | 6 | 150 | 182 | 100 | 32 | 10 |
| 27931 | 8 | 150 | 182 | 100 | 32 | 10 |

Manufactured acc. to IEC 60900.

○ Hex

| Onex | | | | | | | |
|-----------|----|----------------------|---|-------------|-------------|----------|--|
| Order-No. | 0 | \rightleftharpoons | $\stackrel{\textstyle \longrightarrow}{}$ | — 01 | -1 . | 3 | |
| 27932 | 8 | 200 | 232 | 100 | 32 | 10 | |
| 27933 | 10 | 230 | 262 | 100 | 32 | 10 | |
| 27934 | 13 | 230 | | 100 | 02 | 10 | |
| 27935 | 17 | 230 | | 120 | 38 | 10 | |

Manufactured acc. to IEC 60900.









Improved access: Through the 15° position of jaws, light work is made of fastening even in restricted spaces. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved individually tested at 10,000 V AC and approved for 1,000 V AC. for 1,000 V AC. Protects your material: Fully insulated tool reduces the risk of short circuits.

| Order-No. O mm 43026 6 90 1 43027 7 90 1 43028 8 100 1 43029 9 100 1 43030 10 110 1 43031 11 110 1 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 43036 16 160 1 | 5590N |
|---|-------|
| 43027 7 90 1 43028 8 100 1 43029 9 100 1 43030 10 110 1 43031 11 110 1 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43028 8 100 1 43029 9 100 1 43030 10 110 1 43031 11 110 1 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43029 9 100 1 43030 10 110 1 43031 11 110 1 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43030 10 110 1 43031 11 110 1 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43031 11 110 1 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43032 12 130 1 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43033 13 135 1 43034 14 145 1 43035 15 150 1 | |
| 43034 14 145 1 43035 15 150 1 | |
| 43035 15 150 1 | |
| | |
| 43036 16 160 1 | |
| | |
| 43037 17 160 1 | |
| 43038 18 175 1 | |
| 43039 19 175 1 | |
| 43040 22 195 1 | |
| 43041 24 225 1 | |
| 43042 27 250 1 | |
| 43043 30 290 1 | |
| 43044 32 310 1 | |





Meets your requirements: Continuously adjustable spanner width for a large application field. **Provides you with full protection:** Each tool

OAdjustable between 0-30 mm

| 55 | 90 | NΑ | Ą |
|----|----|----|---|
| | | | |

| Order-No. | 0 | ₩₩ | * |
|-----------------|----------------|------------|---|
| 43061 | 0 - 30 | 250 | 1 |
| Manufactured ac | cording to EN/ | IEC 60900. | |



Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

○1/2" hexagon head



| Order-No. | 0 | mm | |
|-----------|----|----|---|
| 43077 | 10 | 55 | 1 |
| 43078 | 11 | 55 | 1 |
| 43079 | 12 | 55 | 1 |
| 43080 | 13 | 55 | 1 |
| 43081 | 14 | 55 | 1 |
| 43082 | 17 | 55 | 1 |
| 43083 | 19 | 55 | 1 |
| 43084 | 22 | 55 | 1 |
| 43085 | 24 | 55 | 1 |
| 43086 | 27 | 55 | 1 |
| | 32 | 55 | 1 |



○3/8" hexagon head











Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:**

| 10,000 Vito and approved for 1,000 Vito. I lotooto your material |
|--|
| Fully insulated tool reduces the risk of short circuits. |
| |
| |

| _ | | | 7207110 |
|----------------|----------|----------|----------|
| Order-No. | 0 | ₩m | ₽ |
| 43065 | 8 | 45 | 1 |
| 43066 | 10 | 45 | 1 |
| 43067 | 11 | 45 | 1 |
| 43068 | 12 | 45 | 1 |
| 43069 | 13 | 45 | 1 |
| 43070 | 14 | 45 | 1 |
| 43071 | 16 | 45 | 1 |
| 43072 | 17 | 45 | 1 |
| 43073 | 18 | 45 | 1 |
| 43074 | 19 | 47 | 1 |
| 43075 | 21 | 47 | 1 |
| 43076 | 22 | 47 | 1 |
| Manufactured a | ccording | to EN/IE | C 60900. |

Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Protects your material:** Fully insulated tool reduces the risk of short circuits.

| O1/4" | nexagon | nead |
|-------|---------|------|
| | | |

| 7209NS |
|--------|
| |

| Order-No. | 0 | mm |
|-----------|-----|----|
| 43088 | 4 | 42 |
| 43089 | 5 | 42 |
| 43090 | 5,5 | 42 |
| 43091 | 6 | 42 |
| 43092 | 7 | 42 |
| 43093 | 8 | 42 |
| 43094 | 9 | 42 |
| 43095 | 10 | 42 |
| 43096 | 11 | 42 |
| 43097 | 12 | 42 |
| 43098 | 13 | 42 |
| 43099 | 14 | 42 |





Insulated nut driver insert





Insulated nut driver insert





Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| • | | | /200NHS |
|-----------------|------------|-----------------|---------|
| Order-No. | lacksquare | mm 😜 | |
| 43100 | 4 | 120 1 | |
| 43101 | 5 | 120 1 | |
| 43102 | 6 | 120 1 | |
| 43103 | 8 | 120 1 | |
| 43104 | 10 | 120 1 | |
| Manufactured ac | | to EN/IEC 60900 | |

● 1/4" internal hexagon

| | | lexagon | 7209NH |
|-----------|------------|---------|--------|
| Order-No. | lacksquare | ₩₩ | 8 |
| 43109 | 3 | 65 | 1 |
| 43110 | 4 | 65 | 1 |
| 43111 | 5 | 65 | 1 |
| 43112 | 6 | 65 | 1 |
| 43113 | 8 | 65 | 1 |

Insulated nut driver insert





Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| 9 0/0 mice | 7207NHS | | |
|-------------------|------------|----|--------------|
| Order-No. | lacksquare | mm | & |
| 43105 | 4 | 75 | 1 |
| 43106 | 5 | 75 | 1 |
| 43107 | 6 | 75 | 1 |
| 43108 | 8 | 75 | 1 |



Ratchet wrench insulated for nut drivers





Protects your health: Reduction of the risk of injury by increasing the 01/2" square adapter for nut driver inserts, hand working space. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC. **Increases your flexibility:** Adjustable right or left rotation through switching lever.

Switchable

| Switchable | | | 7207NRW |
|------------|---------|----------------|---------|
| Order-No. | | ₩₩ | |
| 43052 | 3/8" | 200 | 1 |
| 43053 | 1/2" | 250 | 1 |
| | | to EN/IEC 6090 |). |



Improved access: Deep-set screws can be reached easily. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| | | | 240101 |
|--------------|-----------|----------|----------|
| Order-No. | Ţ. | ₩m | 3 |
| 43063 | 1/2" | 200 | 10 |
| 43062 | 3/8" | | 10 |
| Manufactured | according | to FN/IF | C 60000 |





Improved access: Deep-set screws can be reached easily. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

insulated

| | | | | | 7208N |
|----------------|------------|-----|-------|---|-------|
| Order-No. | = ‡ | mm | | | |
| 43055 | 1/2" | 125 | | 1 | |
| | 1/2" | 250 | | 1 | |
| Manufactured a | according | | 0900. | | |

○3/8" square adapter for nut driver inserts, insulated

| | | | 7207NE |
|----------------|------------|-----|----------|
| Order-No. | = ‡ | mm | 3 |
| 43057 | 3/8" | 125 | 1 |
| 43058 | 3/8" | 250 | 1 |
| Manufactured a | | | nn |





Switch cabinet key pen shape



Increases your efficiency: All keys and profiles integrated into one compact, lightweight tool.

\ominus in blister pack

| Order-No. | 0 | ٥ | O | Θ | ⊕ | * | *** | |
|-----------|-----|---|---|----------|----------|-----------|-----|--|
| 39076 | 5-8 | 9 | | , | | T20 / T25 | 1 | |





Increases your efficiency: All keys and profiles integrated into one compact, lightweight tool.

| _ | |
|-----------|--|
| \supset | |
| | |

| _ | | | | | | 24007 |
|-----------|-----|---|-----|----------|----------|----------|
| Order-No. | 0 | 0 | 0 | Θ | ⊕ | 3 |
| 36114 | 5-8 | 9 | 3-5 | 7,0 | PH2 | 1 |

INFOBOX:

Solid steel cap and hexagon head





- The solid steel cap at the end of the screwdriver handle enables targeted hammering, e.g. to loosen jammed screws
- The direct connection of the solid steel cap to the blade means that the impact energy is transmitted without any loss.
- Blade includes a hexagon bolster for using a set of spanners for additional torque.

Screwdriver SoftFinish





Simplifies your work: Striking cap integrated into the handle allows you to strike and lift with the screwdriver. Facilitates handling: Easy loosening of tight screws thanks to hex bolster for spanners. Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. Increases your efficiency: Screwdriver handle size concept for an optimal balance between precision and control.

⊖Slotted with one-piece hexagonal blade and solid steel cap

| | | | | | | | | 530 |
|-----------------------------------|------------|---------|-------|------------|-------------|-----|----|-----|
| Order-No. | Θ | == | ⊖; | • 1 | _ ‡ | mm | * | |
| 03223 | 3,5 | 75 | 0,6 | 4.0 | - | 186 | 10 | |
| 03224 | 4,5● | 90 | 0,8 | 4.0 | - | 201 | 10 | |
| 03225 | 5,5 | 100 | 1,0 | 5.0 | 8 | 213 | 10 | |
| 03226 | 6,5 | 125 | 1,2 | 6.0 | 10 | 238 | 10 | |
| 03228 | 8,0 | 150 | 1,2 | 8.0 | 13 | 271 | 5 | |
| 03230 | 10,0 | 175 | 1,6 | 8.0 | 13 | 296 | 5 | |
| 03231 | 12,0 | 200 | 2,0 | 10.0 | 16 | 321 | 5 | |
| 03232 | | 250 | 2,5 | 10.0 | 16 | 371 | 5 | |
| Additional di | mension. I | Non-DIN | size. | | | | | |

Phillips with one-piece hexagonal blade and solid steel cap

| | | | | | | | | 53 |
|-----------|--------------|----------|-----|--------------|-----|--------------|----|----|
| Order-No. | 1 | = | •1 | $\bigcirc 1$ | mm | _ | | |
| 03237 | PH1 | 80 | 5,0 | 8 | 186 | 30 | 10 | |
| 03238 | | | -,- | | 213 | | 10 | |
| 03239 | PH3 | 150 | 8,0 | 13 | 268 | 41 | 10 | |

*Pozidriv with one-piece hexagonal blade and solid steel cap

| | | | | | | | | 53 |
|-----------|-----|----------|------------|--------------|-----|-------------|----|----|
| Order-No. | * | = | • 1 | \bigcirc 1 | mm | | | |
| 03245 | PZ1 | 80 | 5,0 | 8 | 186 | 30 | 10 | |
| 03246 | PZ2 | 100 | 6,0 | | 213 | | 10 | |
| 03247 | PZ3 | 150 | 8,0 | 13 | 268 | 41 | 10 | |



Screwdriver SoftFinish®





Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors

Protects your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** Unique Wiha handle-length concept for optimum balance of torque and control.

\bigcirc Slotted with round blade for low-lying screws

| | | • | | *************************************** | | | | 302 |
|-----------|-----------|---------|-----------|---|-----|-----------|----|-----|
| Order-No. | \ominus | | \ominus | •: | mm | ≑ | | |
| 00684 | 2,0• | 65 | 0,4 | 2,0 | 169 | 23 | 10 | |
| 00685 | 2,5 | 75 | 0,4 | 2,5 | 179 | 23 | 10 | |
| 00686 | 3,0• | 80 | 0,5 | 3,0 | 184 | 23 | 10 | |
| 00687 | 3,0 | 100 | 0,5 | 3,0 | 204 | 23 | 10 | |
| 00689 | 3,0• | 150 | 0,5 | 3,0 | 254 | 23 | 10 | |
| 00690 | 3,0• | 200 | 0,5 | 3,0 | 304 | 23 | 10 | |
| 32383 | 3,0 | 300 | 0,5 | 3,0 | 404 | 23 | 5 | |
| 00691 | 3,5 | 100 | 0,6 | 3,5 | 204 | 23 | 10 | |
| 26931 | 3,5• | 200 | 0,6 | 3,5 | 304 | 23 | 10 | |
| 00692 | 4,0 | 100 | 0,8 | 4,0 | 211 | 30 | 10 | |
| 00694 | 4,0• | 150 | 0,8 | 4,0 | 261 | 30 | 10 | |
| 00695 | 4,0● | 200 | 0,8 | 4,0 | 311 | 30 | 10 | |
| 00696 | 4,0● | 300 | 0,8 | 4,0 | 411 | 30 | 10 | |
| 27753 | 4,5● | 80 | 0,8 | 4,5 | 191 | 30 | 10 | |
| 00697 | 4,5● | 125 | 0,8 | 4,5 | 236 | 30 | 10 | |
| 00698 | 5,5 | 125 | 1,0 | 5,5 | 236 | 30 | 10 | |
| 00700 | 5,5 | 150 | 1,0 | 5,5 | 261 | 30 | 10 | |
| 00701 | 5,5∙ | 200 | 1,0 | 5,5 | 311 | 30 | 10 | |
| 00702 | 5,5• | 300 | 1,0 | 5,5 | 411 | 30 | 5 | |
| 32384 | 6,0• | 300 | 1,0 | 6,0 | 418 | 36 | 5 | |
| | | | | | | | | |

Additional dimension. Non-DIN size.







and therapists at German Campaign for Healthier Backs. Increases your efficiency: Unique Wiha handle-length concept for optimum balance of torque and control.

\bigcirc Slotted with round blade

| 3022 |
|------|

| Order-No. | \ominus | ⇌ | \ominus ; | •1 | mm | - ÷ | |
|-----------------------------------|-----------|---------|-------------|-----------|-----|------------|---|
| 27754 | 6,0 | 100 | 1,0 | 5,5 | 218 | 36 | 10 |
| 27755 | 6,0 | 150 | 1,0 | 5,5 | 268 | 36 | 10 |
| 00704 | 6,5 | 100 | 1,2 | 6,0 | 218 | 36 | 10 |
| 00703 | 6,5 | 150 | 1,2 | 6,0 | 268 | 36 | 10 |
| 00706 | 6,5• | 200 | 1,2 | 6,0 | 318 | 36 | 10 |
| 00708 | 8,0 | 150 | 1,2 | 7,0 | 274 | 41 | 10 |
| 00707 | 8,0 | 175 | 1,2 | 7,0 | 299 | 41 | 10 |
| 00709 | 8,0 | 175 | 1,6 | 7,0 | 299 | 41 | 5 |
| 32399 | 8,0 | 300 | 1,2 | 7,0 | 424 | 41 | 5 |
| 00711 | 10,0 | 200 | 1,6 | 8,0 | 324 | 41 | 10 |
| 32400 | 10,0 | 300 | 1,6 | 8,0 | 424 | 41 | 5 |
| 00712 | 12,0 | 250 | 2,0 | 8,0 | 374 | 41 | 10 |
| 00713 | 14,0• | 250 | 2,5 | 11,0 | 374 | 41 | 10 |
| Additional di | mension. | Non-DIN | size.DIN | I ISO 238 | 0. | - | *************************************** |







Bit holder CentroFix mechanically lockable



Simplifies your work: Ideal for all applications due to the non-magnetic locking mechanism . **Increases your efficiency:** Extremely secure and tight zero-play hold of bits.






Simplifies your work: Unrestricted access to low-lying screws thanks to bit holder lengths of up to 250mm. **Increases your efficiency:** Unlimited access to deep-set screws thanks to extreme slimline design.

O1/4"

| Order-No. | 0 | • | mm⊓ | \$ |
|-----------|-----|-----|-----|-----------|
| 32477 | 1/4 | 1/4 | 60 | 10 |

Bit holder CentroFix Super Slim mechanically lockable

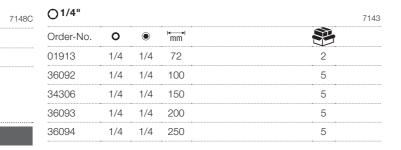



Saves time: Automatic bit locking mechanism upon insertion. **Increases your efficiency:** Unlimited access to deep-set screws thanks to extreme slimline design.



∩1/4", magnetic

| O 1/4 , 111ag | | | | 7148 CS |
|---------------|-----|-----|----|---------|
| Order-No. | 0 | • | mm | |
| 39134 | 1/4 | 1/4 | 66 | 1 |

76 wiha 🍩



Meets your requirements: Robust and precise bits for general fastening in trade and industry. **Saves time:** Simple and quick recognition of profile sizes thanks to contrasting laser marking. **Increases your efficiency:** Best rotation characteristics for stable fastening processes.

| \bigcirc Slotted | 1/4" | | | 7040 Z | | | | |
|--------------------|----------|-----------------------|-----|--------|-----------------|----------|--------------------------|---------|
| Order-No. | Θ | l←→l mm | ⊖; | | ⊕ Phillips | 1/4" | | 7041 Z |
| 33961 | 2,5 | 70 | 0,4 | 5 | Order-No. | ⊕ | l ← → l mm | 3 |
| 01790 | 3,0 | 50 | 0,5 | 5 | 31960 | PH00 | 50 | 5 |
| 33962 | 3,0 | 70 | 0,5 | 5 | 31961 | PH00 | 70 | 5 |
| 01792 | 3,5 | 50 | 0,6 | 5 | 31962 | PH00 | 90 | 5 |
| 33963 | 3,5 | 70 | 0,6 | 5 | 32105 | PH0 | 50 | 5 |
| 01791 | 4,0 | 50 | 0,5 | 5 | 35456 | PH0 | 70 | 5 |
| 01794 | 4,0 | 50 | 0,8 | 5 | 35457 | PH0 | 90 | 5 |
| 33964 | 4,0 | 70 | 0,8 | 5 | 33703 | PH1 | 50 | 5 |
| 01793 | 4,5 | 50 | 0,6 | 5 | 01803 | PH1 | 70 | 5 |
| 01795 | 5,5 | 50 | 0,8 | 5 | 04126 | PH1 | 90 | 5 |
| 01796 | 5,5 | 50 | 1,0 | 5 | 23213 | PH1 | 110 | 5 |
| 33965 | 5,5 | 70 | 1,0 | 5 | 23219 | PH1 | 127 | 5 |
| 01798 | 6,5 | 50 | 1,2 | 5 | 22509 | PH1 | 150 | 5 |
| 33966 | 6,5 | 70 | 1,2 | 5 | 33704 | PH2 | 50 | 5 |
| 01799 | 8,0 | 50 | 1,2 | 5 | 01805 | PH2 | 70 | 5 |
| 01800 | 8,0 | 50 | 1,6 | 5 | 04009 | PH2 | 90 | 5 |
| | | | • | - | 05800 | PH2 | 110 | 5 |
| ⊕ Pozidri | v 1/4" | | | 7042 Z | 06888 | PH2 | 127 | 5 |
| Order-No. | € | mm | | | 22510 | PH2 | 150 | 5 |
| 31957 | PZ0 | 50 | • | 5 | 33705 | PH3 | 50 | 5 |
| 31958 | PZ0 | 70 | • | 5 | 04010 | PH3 | 70 | 5 |
| 31959 | PZ0 | 90 | • | 5 | 04127 | PH3 | 90 | 5 |
| 33706 | PZ1 | 50 | | 5 | 23215 | PH3 | 110 | 5 |
| 01808 | PZ1 | 70 | • | 5 | 23217 | PH3 | 127 | 5 |
| 01809 | PZ1 | 90 | • | 5 | 22511 | PH3 | 150 | 5 |
| 23221 | PZ1 | 110 | | 5 | | | | |
| 23225 | PZ1 | 127 | | 5 | ⊕ PlusMi | nus/Ph | illips 1/4" | 7049PHM |
| 23227 | PZ1 | 150 | | 5 | Order-No. | (| € mm | |
| 33707 | PZ2 | 50 | | 5 | 32490 | SL/I | PH1 50 | 5 |
| 01811 | PZ2 | 70 | • | 5 | 32491 | SL/I | PH1 70 | 5 |
| 01812 | PZ2 | 90 | • | 5 | 32686 | SL/I | PH1 90 | 5 |
| 05799 | PZ2 | 110 | | 5 | 32492 | SL/I | PH2 50 | 5 |
| 06889 | PZ2 | 127 | • | 5 | 32493 | SL/I | PH2 70 | 5 |
| 23228 | PZ2 | 150 | | 5 | 32687 | SL/I | PH2 90 | 5 |
| 33708 | PZ3 | 50 | • | 5 | | | | |
| 04059 | PZ3 | 70 | | 5 | | | | |
| 04176 | PZ3 | 90 | - | 5 | | | | |
| 23223 | PZ3 | 110 | | 5 | | | | |
| 23226 | PZ3 | 127 | - | 5 | | | | |
| 22512 | PZ3 | 150 | - | 5 | | | | |





| | | | 1/4" | 7049PZM | 36327 | T8 | 150 | 5 |
|---|---------|-----------------------|-----------------------------|---|-----------|------|---|----------|
| Order-No. | (| ₽ | ı < → I mm | 8 | 32305 | Т9 | 50 | 5 |
| 32494 | SL/ | PZ1 | 50 | 5 | 33712 | Т9 | 70 | 5 |
| 32495 | SL/ | PZ1 | 70 | 5 | 33720 | Т9 | 90 | 5 |
| 32688 | SL/ | PZ1 | 90 | 5 | 38372 | T9 | 150 | 5 |
| 32496 | SL/ | PZ2 | 50 | 5 | 32306 | T10 | 50 | 5 |
| 32497 | SL/ | PZ2 | 70 | 5 | 33713 | T10 | 70 | 5 |
| 32689 | SL/ | PZ2 | 90 | 5 | 33721 | T10 | 90 | 5 |
| *************************************** | | | | *************************************** | 33725 | T10 | 110 | 5 |
| (♣) TORX ® I | Magic | Spring |) [®] 1/4" | 7045R | 33726 | T10 | 150 | 5 |
| Order-No. | | mm⊓ | | 8 | 32307 | T15 | 50 | 5 |
| 34452 | T10 | 50 | - | 5 | 33714 | T15 | 70 | 5 |
| 34453 | T15 | 50 | - | 5 | 33722 | T15 | 90 | 5 |
| 34454 | T20 | 50 | | 5 | 33727 | T15 | 110 | 5 |
| 34455 | T25 | 50 | - | 5 | 33728 | T15 | 150 | 5 |
| 34456 | T30 | 50 | | 5 | 32308 | T20 | 50 | 5 |
| 34457 | T40 | 50 | | 5 | 33715 | T20 | 70 | 5 |
| | | | | | 33723 | T20 | 90 | 5 |
| TORX® | ball en | d 1/4" | 1 | 7045BE | 33729 | T20 | 110 | 5 |
| Order-No. | • | mm | - | \$ | 33730 | T20 | 150 | 5 |
| 32409 | T9 | 50 | | 5 | 32309 | T25 | 50 | 5 |
| 32410 | T10 | 50 | • | 5 | 33716 | T25 | 70 | 5 |
| 32416 | T10 | 70 | | 5 | 33724 | T25 | 90 | 5 |
| 32417 | T15 | 50 | | 5 | 33731 | T25 | 110 | 5 |
| 32418 | T15 | 70 | | 5 | 33732 | T25 | 150 | 5 |
| 32411 | T20 | 50 | | 5 | 33920 | T27 | 50 | 5 |
| 32419 | T20 | 70 | | 5 | 33921 | T27 | 70 | 5 |
| | | • | | 5 | 33922 | T27 | 90 | 5 |
| 32412 | T25 | 50 | | | 33923 | T30 | 50 | 5 |
| 32421 | T25 | 70 | | 5 | 33924 | T30 | 70 | 5 |
| 32413 | T27 | 50 | | 5 | 33925 | T30 | 90 | 5 |
| 32414 | T30 | 50 | • | 5 | 33926 | T30 | 110 | 5 |
| 32423 | T30 | 70 | • | 5 | 33927 | T30 | 150 | 5 |
| 32415 | T40 | 50 | | 5 | | T40 | *************************************** | |
| ♠ TORX® | 1/4" | | | 7045 7 | 33928 | | 50 | 5 |
| | | l < → l | | 7045 Z | 33929 | T40 | 70 | 5 |
| Order-No. | | mm' | - | * | 33930 | T40 | 90 | 5 |
| 39184 | T1 | 50 | - | 5 | 33931 | T40 | 110 | 5 |
| 39185 | T2 | 50 | | 5 | 33932 | T40 | 150 | 5 |
| 39186 | T3 | 50 | • | 5 | TORX P | LUS® | 1/4" | |
| 39187 | T4 | 50 | | 5 | | | *************************************** | 7046 2 |
| 32299 | T5 | 50 | - | 5 | Order-No. | | mm l | 3 |
| 32302 | T6 | 50 | | 5 | 39195 | 1IP | 50 | 5 |
| 33709 | T6 | 70 | | 5 | 39196 | 2IP | 50 | 5 |
| 33717 | T6 | 90 | | 5 | 32486 | 3IP | 50 | 5 |
| 38370 | Т6 | 150 | | 5 | 39197 | 4IP | 50 | 5 |
| 32303 | T7 | 50 | | 5 | 39198 | 4IP | 90 | 5 |
| 33710 | T7 | 70 | | 5 | 28481 | 5IP | 50 | 5 |
| 33718 | T7 | 90 | | 5 | 39199 | 5IP | 90 | 5 |
| 38371 | T7 | 150 | | 5 | 31973 | 6IP | 90 | 5 |
| 32304 | T8 | 50 | | 5 | 26000 | 6IP | 50 | 5 |
| 33711 | Т8 | 70 | | 5 | 26002 | 7IP | 50 | 5 |
| | | 90 | • | 5 | 23195 | 8IP | | 5 |



| 31975 | 8IP | 90 | 2 | ••••••••••••••••••••••••••••••••••••••• | Hexago | n 1/4" | | | 704 | 3 Z |
|-----------------------------|---------------------------------|------------------------------|-----------|---|---|----------|-------------------------|--------------------------|-----------|--------|
| 23197 | 9IP | 50 | 5 | | Order-No. | • | ı ← →ı mm | | ** | |
| 23199 | 10IP | 50 | 5 | *************************************** | 05301 | 1,5 | 50 | | 5 | |
| 31977 | 10IP | 90 | 5 | | 05302 | 2,0 | 50 | - | 5 | |
| 23201 | 15IP | 50 | 5 | ••••••••••••••••••••••••••••••••••••••• | 34554 | 2,0 | 70 | | 5 | |
| 25553 | 15IP | 90 | 5 | ••••••••••••••••••••••••••••••••••••••• | 39178 | 2,0 | 90 | | 5 | |
| 23203 | 20IP | 50 | 5 | •••••• | 05303 | 2,5 | 50 | | 5 | |
| 39200 | 20IP | 90 | 5 | • | 34555 | 2,5 | 70 | - | 5 | |
| 23205 | 25IP | 50 | 5 | | 39179 | 2,5 | 90 | - | 5 | |
| 39201 | 25IP | 90 | 5 | | 04194 | 3,0 | 50 | - | 5 | |
| 23207 | 27IP | 50 | 5 | | 34556 | 3,0 | 70 | | 5 | |
| 39202 | 27IP | 90 | 5 | | 39180 | 3,0 | 90 | | 5 | |
| 23209 | 30IP | 50 | 5 | | 04195 | 4,0 | 50 | | 5 | |
| 39203 | 30IP | 90 | 5 | | 34557 | 4,0 | 70 | | 5 | |
| 23211 | 40IP | 50 | 5 | | 39181 | 4,0 | 90 | - | 5 | |
| 39204 | 40IP | 90 | 5 | | 04196 | 5,0 | 50 | | 5 | |
| | _ | | | | 34558 | 5,0 | 70 | | 5 | |
| ★ TORX® | Tampe | r Resistant (with hole) 1/4" | 7 | 7045 Z TR | 39182 | 5,0 | 90 | | 5 | |
| Order-No. | • | mm | | | 04197 | 6,0 | 50 | | 5 | |
| 21045 | T7H | 50 | 5 | | 34559 | 6,0 | 70 | - | 5 | |
| 21047 | T8H | 50 | 5 | | 39183 | 6,0 | 90 | | 5 | |
| 20218 | Т9Н | 50 | 5 | | 04198 | 8,0 | 50 | | 5 | |
| 20219 | T10H | 50 | 5 | | 34560 | 8,0 | 70 | | 5 | ****** |
| 39188 | T10H | 90 | 5 | | *************************************** | | • | | - | |
| 24867 | T15H | 50 | 5 | | Square | 1/4" | | | 704 | 8 Z |
| 39189 | T15H | 90 | 5 | | Order-No. | | • | l ← → l mm | *** | |
| 20220 | T20H | 50 | 5 | | 06637 | #1 | 2,3 | 50 | 5 | |
| 39190 | T20H | 90 | 5 | | 39206 | #1 | 2,3 | 90 | 5 | |
| 20221 | T25H | 50 | 5 | | 06638 | #2 | 2,8 | 50 | 5 | |
| 39191 | T25H | 90 | 5 | | 39207 | #2 | 2,8 | 90 | 5 | |
| 20222 | T27H | 50 | 5 | | 06639 | #3 | 3,3 | 50 | 5 | |
| 39192 | T27H | 90 | 5 | | 39208 | #3 | 3,3 | 90 | 5 | |
| 20223 | T30H | 50 | 5 | | | | | | | |
| 39193 | T30H | 90 | 5 | | ⊕ Torq-Se | et® 1/4 | | | 7049 | TS |
| 20224 | T40H | 50 | 5 | | Order-No. | ⊕ | mm | | | |
| 39194 | T40H | 90 | 5 | | 22596 | 4 | 50 | | 5 | |
| | | | | | 33699 | 4 | 90 | • | 5 | |
| Hexago | nal bal | I end 1/4" | | 7047R Z | 22597 | 5 | 50 | • | 5 | |
| Order-No. | • | i √ → I | | | 33700 | 5 | 90 | | 5 | |
| 25739 | 3,0 | 50 | 5 | | 22598 | 6 | 50 | | 5 | |
| 25740 | 4,0 | 50 | 5 | | 33701 | 6 | 90 | | 5 | |
| 25741 | 5,0 | 50 | 5 | • | 22599 | 8 | 50 | | 5 | |
| 25742 | 6,0 | 50 | 5 | • | 33702 | 8 | 90 | | 5 | |
| | | ex 1/4" | | 7043R Z | 22600 | 10 | 50 | | 5 | |
| ● MagicR | ling® he | | | 1 07011Z | | | | | | |
| | | | \$ | ••••••••••••••••••••••••••••••••••••••• | | | | | | |
| Order-No. | • | i sH mm | 3 | | | | | | | |
| Order-No. 23145 | ●3,0 | 50 | 5 | | | | | | | |
| Order-No. 23145 23147 | 3,0 4,0 | 50 50 | 5 5 | | | | | | | |
| Order-No. 23145 | ●3,0 | 50 | 5 | | | | | | | |





Screwdriver with LiftUp 25 magnetic bit magazine



Simplifies your work: Larger handle – maximum power. Protects your health: No risk of injury, all blades stowed safely inside the handle. Increases your flexibility: Standard bits are also suitable for machine operation.







Mixed with 12 bits, 1/4"

| 3803 | Ω | 001 | |
|------|----------|-----|--|
| 3003 | UZ | ᄓᅩᅵ | |

33764

| Order-No | o. 🔒 |
|--------------|---------------------------------------|
| 38601 | 5 |
| \ominus | 1 x 5,5 |
| ① | 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 |
| (*) | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 |
| | 1 x 3,0 / 1 x 4,0 / 1 x 5,0 |
| | |

Screwdriver with bit magazine magnetic

Slotted, Phillips with 6 bits, Stubby, 1/4"

1 x 4,5 / 1 x 6,5 / 1 x 8,0 1 x PZ1 / 1 x PZ2 / 1 x PZ3



Saves space: Six tools in one. Increases your efficiency: Unrestricted access to confined spaces thanks to extremely short screwdriver handle.

| Order-1 | No. | 3 |
|------------|---|---------------|
| 33736 | | 10 |
| \ominus | 1 x 4,5 / 1 x 6,5 / 1 x 8,0 | |
| ⊕ | 1 x PH1 / 1 x PH2 / 1 x PH3 | |
| TORX | ® with 6 bits, Stubby, 1/4" | 3801 03 |
| Order-I | No. | 3 |
| 33743 | | 10 |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x | T30 / 1 x T40 |
| Slotte | d, Pozidriv with 6 bits, Stubby, 1/4" | 3801 0 |
| | | |


3801 01







Three.For all your jobs.

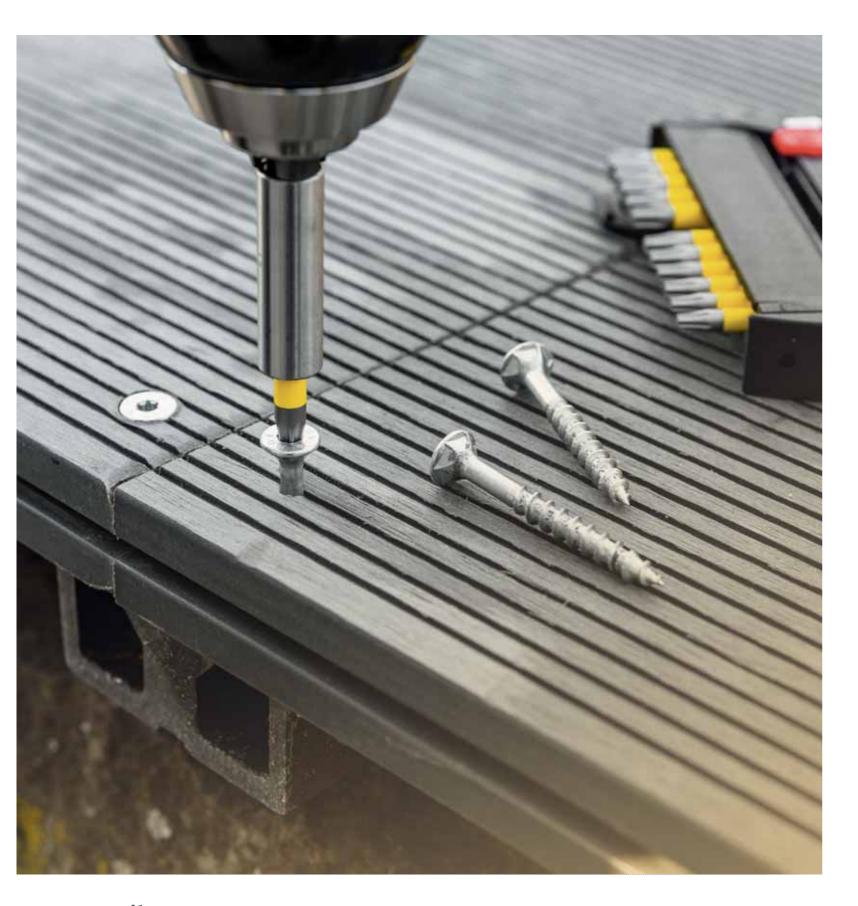



Which machine? Which application? Which bit? The revolutionary Wiha bit concept puts an end to any confusion and presents three bit types which can cover all areas of use.

Only the screw shape is crucial for selecting the bit. The Y bit is ideal for fastening Y-shaped screws with an angle no greater than 90° between the thread and screw head. The T bit is used for T-shaped screws at a 90° angle. If you need to fasten both screw types, then the TY bit is the right choice since this universal bit is suitable for all type of fastenings.

Increases your efficiency


The specialist with 120x greater lifespan* thanks to optimised bits. * Compared to Wiha standard

Lowers your costs

Bit quick and easy to find thanks to marking even in dark environments when a UV light is used.

Saves time

No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan.

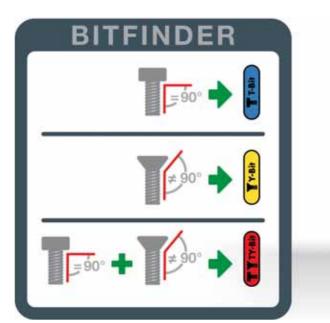







BitBuddy® TY bit set, 49 mm









Lowers your costs: Bit quick and easy to find thanks to red marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. Increases your efficiency: The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)





| Pozidriv 1/4" 7-pcs. | | SB 7946-TY202 |
|----------------------|-----------------------------|---------------|
| Order-No |). | 3 |
| 42099 | | 6 |
| ₩ | 1 x PZ1 / 5 x PZ2 / 1 x PZ3 | |

| Hexagon 1/4" 7-pcs. | | SB 7946-TY303 |
|---------------------|---------------------------------------|---------------|
| Order-No. | | 3 |
| 42114 | | 6 |
| | 2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6 | |

| TORX® 1/4" 7-pcs. | | SB 7946-TY505 |
|-------------------|---|---------------|
| Order-No. | | 3 |
| 42115 | | 6 |
| * | 1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 | |
| | | |

| Phillips, Pozidriv, TORX®, 7-pcs., 1/4" | | SB 7946-TY903 |
|---|-----------------------------|---------------|
| Order-No |). | |
| 42116 | | 6 |
| ⊕ | 1 x PH2 | |
| * | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 | |
| ③ | 1 x T15 / 1 x T20 / 1 x T25 | |
| | | |

| Phillips, Pozidriv, TORX®, 7-pcs., 1/4" SB 7946 | | SB 7946-TY904 |
|---|---------------------------------------|---------------|
| Order-I | No. | 3 |
| 42117 | | 6 |
| \oplus | 1 x PH2 | |
| ⊕ | 1 x PZ1 / 1 x PZ2 | |
| (2) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 | 5 |

| Pozidriv, TORX® 7-pcs. 1/4" in box SB 7946-TY905 | | |
|--|-------------------------------|-------------------|
| Order-No. | | |
| 42118 | | 6 |
| ₩ | 1 x PZ2 / 1 x PZ3 | |
| • | 1 x T15 / 1 x T20 / 1 x T25 / | 1 x T30 / 1 x T40 |
| | | |

| BitBuddy" I Y bit set, 29 mm |
|------------------------------|
| Wiha Wisher |

Lowers your costs: Bit quick and easy to find thanks to red marking even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Automatic opening at the push of a button and simple bit change directly in the holder. Increases your efficiency: The all-rounder with 120x greater lifespan* thanks to patented bit technology, suitable for all screws. (*compared to Wiha standard bit)



Pozidriv 1/4" 8-pcs.



| Order-No. | | |
|-----------|---|--------------|
| 42098 | | 6 |
| ₩ | 1 x PZ1 / 5 x PZ2 / 1 x PZ3 | |
| 0 | 1 x Bit holder magnetic extra strong ma | gnet 1/4" |
| | on 8-pcs. 1/4" | SB 7945-TY30 |
| 42135 | | 6 |
| | 2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x | SW6 |
| 0 | 1 x Bit holder magnetic extra strong ma | |
| | | |

SB 7945-TY202



TORX® 1/4" 8-pcs.

SB 7945-TY505

| Order-No. | | |
|------------|---|--|
| 42136 | 6 | |
| (*) | 1 x T10 / 1 x T15 / 2 x T20 / 1 x T25 / 1 x T30 / 1 x T40 | |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" | |

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY900

| Order-No. | *** |
|------------|--|
| 42137 | 6 |
| + | 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 |
| (*) | 1 x T15 / 1 x T20 / 1 x T25 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |

Phillips, Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY904

| Order-No. | |
|--------------|--|
| 42138 | 6 |
| ① | 1 x PH2 |
| ₩ | 1 x PZ1 / 1 x PZ2 |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |

Pozidriv, TORX®, 8-pcs., 1/4"

SB 7945-TY905

| Order-No. | |
|-----------|--|
| 42139 | 6 |
| ₩ | 1 x PZ2 / 1 x PZ3 |
| • | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |
| | |

XLSelector T bit set, 50 mm









Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

Phillips, TORX®, hex 13-pcs. 1/4"

SB 7948-T95

| • • | · · · · · · · · · · · · · · · · · · · |
|----------------|--|
| Order-No. | 2 |
| 41831 | 6 |
| *** | 1 x PH1 / 1 x PH2 / 1 x PH3 |
| | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| | 1 x SW3 / 1 x SW4 / 1 x SW5 / 1 x SW6 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |

XLSelector T bit set, 25 mm









Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for T-shaped screws(*compared to Wiha standard bit)

Phillips, TORX®, hex 31-pcs. 1/4"

SB 7948-T999

| Order-No. | |
|------------|---|
| 41830 | 6 |
| ⊕ | 2 x PH1 / 4 x PH2 / 2 x PH3 |
| (*) | 2 x T10 / 2 x T15 / 4 x T20 / 2 x T25 / 2 x T30 / 2 x T40 |
| | 2 x SW3 / 2 x SW4 / 2 x SW5 / 2 x SW6 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |





FlipSelector T bit set, 25 mm









SR 7947-T906

Lowers your costs: Bit quick and easy to find thanks to blue marking – even in dark environments by using an UV light. Saves time: No long marking – even in dark environments by using an UV light. Saves searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. **Increases** specialist with 120x greater lifespan* thanks to optimised bit for your efficiency: The specialist with 120x greater lifespan* thanks to Y-shaped screws(*compared to Wiha standard bit) optimised bit for T-shaped screws(*compared to Wiha standard bit)

XLSelector Y bit set, 50 mm









time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The

Hexagon 16-pcs. 1/4"

| Order-No. | | 3 |
|-----------|---|----------|
| 41825 | | 6 |
| | 3 x SW3 / 3 x SW4 / 3 x SW5 / 3 x SW6 | |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4 | 66 |

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

| - | 0810411000 |
|----------------|---|
| Order-No. | 3 |
| 41824 | 6 |
| *** | 1 x PH1 / 3 x PH2 / 1 x PH3 |
| ₩ | 1 x PZ2 |
| (*) | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |

assorted 1/4" 13-pcs.

| | | SB /94/-1999 |
|---|--|--------------|
| Order-No. | | <u>}</u> |
| 41826 | 6 | |
| ⊕ | 1 x PH1 / 1 x PH2 / 1 x PH3 | |
| ₩ | 1 x PZ2 | |
| (*) | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 | |
| | 1 x SW4 / 1 x SW5 / 1 x SW6 | |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" | |
| *************************************** | *************************************** | |

SB 7947-T303 Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

| pc | ,, r oziam, r orist , ro pooi, i/ r | SB /948-Y95 |
|----------|--|---------------------|
| Order-N | lo. | |
| 41834 | | 6 |
| ⊕ | 2 x PH2 | |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 | |
| | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 | / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong mag | net 1/4" |
| | | |





XLSelector Y bit set, 25 mm









Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. Saves time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

FlipSelector Y bit set, 25 mm









Lowers your costs: Bit quick and easy to find thanks to yellow marking – even in dark environments by using an UV light. **Saves** time: No long searches thanks to fluorescent bit, infrequent bit replacement thanks to long lifespan. Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. Increases your efficiency: The specialist with 120x greater lifespan* thanks to optimised bit for Y-shaped screws(*compared to Wiha standard bit)

TORX® 31-pcs. 1/4"

| Order-No. | 3 |
|------------|---|
| 41833 | 6 |
| (*) | 3 x T10 / 6 x T15 / 6 x T20 / 6 x T25 / 6 x T30 / 3 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |

Phillips, Pozidriv, TORX®, 31-pcs., 1/4"

| · ······p·•, · | , , , , , | SB /946-1904 |
|----------------|--|--------------|
| Order-No. | | 3 |
| 41832 | | 6 |
| 1 | 1 x PH1 / 1 x PH3 / 4 x PH2 | |
| ₩ | 2 x PZ1 / 4 x PZ2 / 2 x PZ3 | |
| * | 2 x T10 / 3 x T15 / 3 x T20 / 3 x | |
| 0 | 1 x Bit holder magnetic extra strong r | |

SB 7948-Y505 **Pozidriv 1/4" 13-pcs.**

SB 7947-Y202

| Order-No. | | |
|-----------|---|----|
| 41829 | | 6 |
| ₩ | 2 x PZ1 / 8 x PZ2 / 2 x PZ3 | |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4 | 16 |
| | | |

SB 7948-Y904 TORX® 1/4" 13-pcs.

SB 7947-Y505

| Order-No. | *** |
|------------|---|
| 41828 | 6 |
| (*) | 2 x T10 / 2 x T15 / 3 x T20 / 2 x T25 / 2 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |

Phillips, Pozidriv, TORX®, 13-pcs., 1/4"

SB 7947-Y904

| Order-No. | |
|--------------|---|
| 41827 | 6 |
| + | 2 x PH2 |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 |
| * | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic extra strong magnet 1/4" |







Bit set XLSelector Standard 25 mm



Meets your requirements: Robust and precise bits for general fastening in trade and industry. Saves time: Simple and quick recognition of profile sizes thanks to contrasting laser marking. Increases your efficiency: All standard 25 mm bits organised in a compact, space-saving design.

Bit set FlipSelector Standard 25 mm



Meets your requirements: Robust and precise bits for general fastening in trade and industry. Simplifies your work: Simple and rapid bit removal thanks to clear organisation and automatic opening at the push of a button. Saves time: Simple and quick recognition of profile sizes thanks to contrasting laser marking.

assorted 1/4" 31-pcs.

| assorted | 1/4" 31-pcs. 7948-005 |
|--------------|---|
| Order-No. | * |
| 29417 | 5 |
| \ominus | 1 x 4,5 / 1 x 5,5 / 1 x 6,5 |
| 1 | 2 x PH1 / 4 x PH2 / 1 x PH3 |
| ₩ | 2 x PZ1 / 5 x PZ2 / 1 x PZ3 |
| ③ | 2 x T10 / 2 x T15 / 2 x T20 / 3 x T25 / 2 x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" |

assorted 1/4" 31-pcs.

| | • | 1340 321 |
|----------|--|---------------------|
| Order-No |). | |
| 29416 | | 5 |
| 3 | 1x0 / 1x1 / 1x2 / 1x3 / 1x4 | |
| • | 1 x 4 / 1 x 6 / 1 x 8 / 1 x 10 | |
| • | 1 x TR2,0 / 1 x TR2,5 / 1 x TR3,0 / 1 x 1 x TR6,0 | TR4,0 / 1 x TR5,0 / |
| + | 1 x 6 / 1 x 8 / 1 x 10 | |
| * | 1 x T8H / 1 x T9H / 1 x T10H / 1 x T15 1 x T25H / 1 x T27H / 1 x T30H / 1 x T | , |
| | 1 x #1 / 1 x #2 / 1 x #3 | |
| 0 | 1 x Bit holder CentroFix Force mechanically magnetisch | y lockable 1/4", |

| assorted 1/4" 13-pcs. | | 7947-99 |
|-----------------------|---------------------------------------|---------|
| | Order-No. | |
| 39078 | | 10 |
| \ominus | 1 x 5,5 | |
| ① | 1 x PH2 | |
| ₩ | 1 x PZ1 / 1 x PZ2 / 1 x PZ3 | |
| (*) | 1 x T15 / 1 x T20 / 1 x T25 / 1 x T30 | |
| | 1 x 3,0 / 1 x 4,0 / 1 x 5,0 | |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |

7948-927 Slotted, Phillips, Pozidriv 1/4" 13-pcs.

| Slotted, Phillips, Pozidriv 1/4" 13-pcs. Order-No. | | 7947-005 |
|---|-------------------------------------|----------|
| | | |
| 39029 | | 10 |
| \ominus | 1 x 5,5 | |
| ① | 1 x PH1 / 3 x PH2 / 1 x PH3 | |
| ₩ | 1 x PZ1 / 4 x PZ2 / 1 x PZ3 | |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |
| | | |

| Phillips, Pozidriv, TORX®, 13-pcs., 1/4" | | 7947-904 |
|--|---|-----------------|
| Order-N | No. | |
| 39040 | | 10 |
| ⊕ | 2 x PH2 | |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 | |
| | 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25 / 1 | x T30 / 1 x T40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |

Pozidriv, TORX® 1/4" 13-pcs.

| Pozidri | v, TORX® 1/4" 13-pcs. | 7947-905 |
|----------|---|----------|
| Order-No | 0. | |
| 39041 | 1 | 0 |
| ₩ | 1 x PZ1 / 2 x PZ2 / 1 x PZ3 | • |
| • | 1 x T10 / 1 x T15 / 2 x T20 / 2 x T25 / 1 x T30 | |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |



TORX® 1/4" 13-pcs.

| Order-No. | | ₩ |
|-----------|---|-------------|
| 39124 | | 10 |
| ③ | 1 x T7 / 1 x T8 / 1 x T9 / 1 x T10 / 2 x T15 2 x T25 / 1 x T30 / 1 x T40 | / 2 x T20 / |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |

TORX® Tamper Resistant (with hole) 1/4" 13-pcs.

| | /9 | 947-505TR |
|-----------|--|-----------|
| Order-No. | * | |
| 39037 | 10 | |
| * | 1 x T7H / 1 x T8H / 1 x T9H / 1 x T10H / 2 x T15H 2 x T20H / 2 x T25H / 1 x T30H / 1 x T40H | / |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |

Hexagon 1/4" 11-pcs.

| Hexagon | 1/4 11-pcs. | 7947-902 |
|-----------|--|-------------|
| Order-No. | | 3 |
| 39039 | | 10 |
| | $\begin{array}{l} 1 \times 1,5 \ / \ 1 \times 2,0 \ / \ 1 \times 2,5 \ / \ 2 \times 3,0 \ / \ 2 \times 4,0 \\ 1 \times 6,0 \ / \ 1 \times 8,0 \end{array}$ | / 1 x 5,0 / |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |

SIT (for Assy® and Pias screws), 13-pcs., 1/4"

| 0 (| 50, and the corono,, to pool, | 7947-995 |
|-----------|--|--------------------|
| Order-No. | | 3 |
| 39045 | | 10 |
| | 2 x SIT 10 / 4 x SIT 20 / 3 x SIT 25 / 2 x S | IT 30 / 1 x SIT 40 |
| 0 | 1 x Bit holder magnetic, 58 mm 1/4" | |

High-performance offset screwdriver with quick release holder 1/4"



Increases your safety: Variably settable stabiliser arm. Increases your efficiency: Unlimited access to hard-to-reach screws thanks to the 105°-angled tool head.

○1/4" in blister pack

| | - | | | 2 |
|------------|---|-------------|------------|----------|
| rder-No. O | • | 4 ii | max. Nm | 3 |


1/4 1/4 165 57







Perfect order when fast work is required.

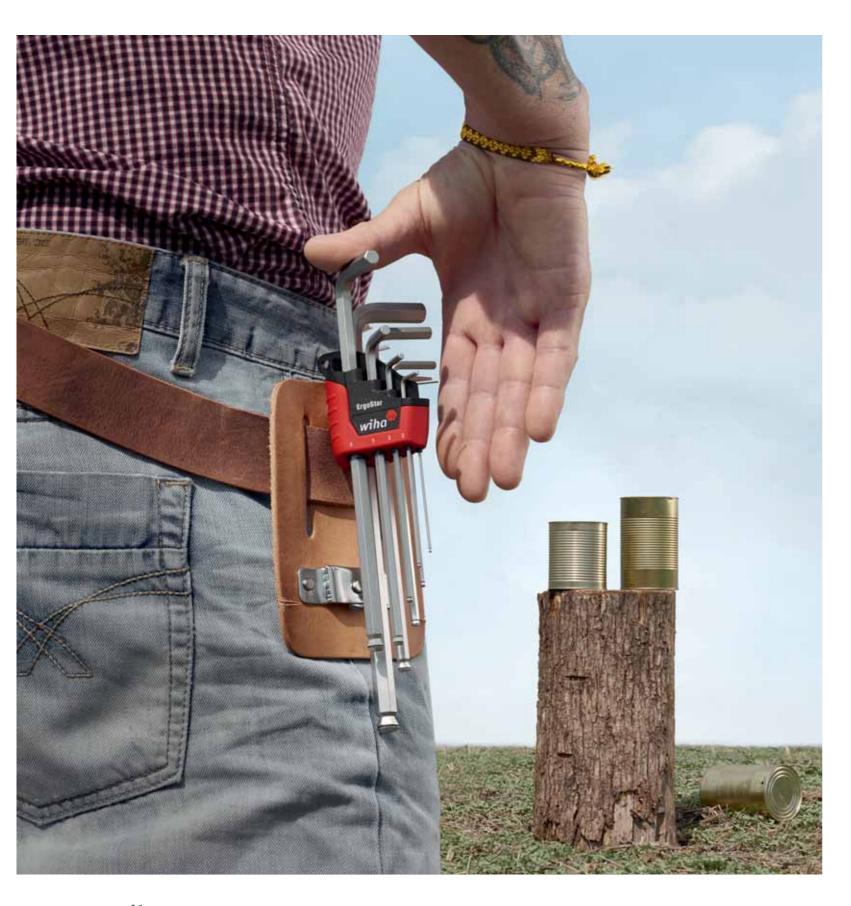



Perfect order and easy handling - the ErgoStar L-key holder provides both: Rotating a single L-key in the holder means that all other keys rotate at the same angle! Keys sitting next to each other no longer need to be disentangled. Instead, all keys are ready for removal with one turn - as fast and easy as never before. The keys of the ErgoStar also help to make work significantly easier: The Wiha L-key set of the 369R series, made of fully hardened chrome vanadium steel, includes an innovation that will convince everyone. A spring steel ring holds hexagon screws reliably.

Simplifies your work

The ball end facilitates access to screws and allows you to work at an angle of up to 25°.

Increases your efficiency


Wiha MagicRing® retaining function holds all screws firmly in place - without any magnets.

Facilitates handling

Always the correct key when you need it.


Saves time

Ensures order: removing and targeted insertion in the holder is child's play.

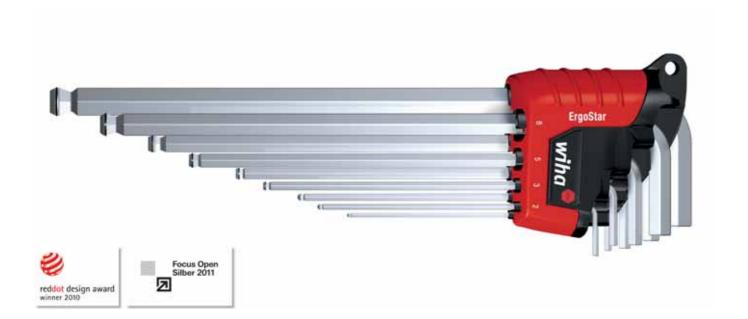



L-key set in ErgoStar holder

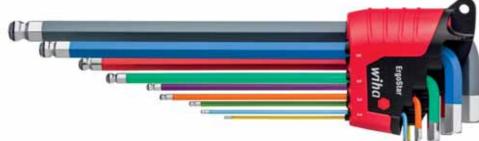



Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Reduces the risk of forgetting and leaving keys inside a machine and causing damage. Facilitates handling: Always the right key in the right place with the ErgoStar holder. Increases your efficiency: Coloured L-keys quick and easy to find – also in dark environments thanks to fluorescent paint visible in UV light. The required key width can be quickly found thanks to colour coding. Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

hexagonal ball Magicring® 9-pcs. in flourescent colour

| | 3 | 369RF |
|--------------|------------------------------------|----------|
| Order-No. | | 2 |
| 41979 | | 5 |
| | 1,5 / 2 / 2,5 | |
| | 3 / 4 / 5 / 6 / 8 / 10 | |
| MagicRing® f | from size 3 mm. Resed on ISO 2036I | |

INFOBOX: Tools in fluorescent colour





- Coloured bits and ErgoStar with coloured L-keys light up under a UV light.
- Ensuring misplaced tools are quickly and easily found again.
- The Wiha flashlight with a UV light makes the perfect complement to coloured fluorescent tools.



| September 1 | |
|--|--|
| ers your costs: Reduces ley in the right place with the ks to fluorescent paint ure holds all hex screws in | |
| 369RF | |
| 5 | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

L-key set in ErgoStar holder







Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Lowers your costs:** Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. **Facilitates handling:** Always the correct key when you need it. Saves time: Ensures order: removing and targeted insertion in the holder is child's play. Increases your efficiency: Wiha MagicRing® holding feature holds all hex screws in place without a magnet.

Hexagonal ball end MagicRing® matt chrome-plated 9-pcs.

| _ | gonal ball end MagicRing® matt chrome-plated 9-pcs. | 369R |
|----------|--|------|
| Order-N | | 8 |
| 37351 | | 5 |
| | 1,5 / 2 / 2,5 | |
| | 3 / 4 / 5 / 6 / 8 / 10 | - |
| MagicRin | ing [®] from size 3 mm. Based on ISO 2936L. | |

INFOBOX: MagicRing[®]





Wiha MagicRing®

- Spring steel ring reliably holds hex screws in place
- An innovation, which will benefit each user.

wiha • 93

L-key set in Compact holder

Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. Saves space: All standard keys organised in a compact, space-saving design.

L-key set in ErgoStar holder



Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. **Facilitates handling:** Always the correct key when you need it. **Saves time:** Ensures order: removing and targeted insertion in the holder is child's play.

Hexagonal ball end matt chrome-plated 11-pcs.

| Order-No. | | |
|---------------|---|---|
| 36453 | | 5 |
| | 1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 7 / 8 / 9 | |
| Including 7 m | n and 9 mm special sizes. Based on ISO 2936L. | |

369 TORX® ball end, 13-pcs., black oxidised

| | ona, to pool, black oxidiood | 300BE |
|---------------|--|----------|
| Order-No. | • | 3 |
| 36487 | | 5 |
| ③ | T5 / T6 / T7 / T8 | |
| • | T9 / T10 / T15 / T20 / T25 / T27 / T30 / | |
| TORX® ball en | d from size T9 | |

L-key set in Compact holder



Simplifies your work: The ball end facilitates access to screws and allows you to work at an angle of up to 25°. Lowers your costs: Highly durable thanks to high-quality, chrome-plated L-key surface to prevent corrosion. Saves space: All standard keys organised in a compact, space-saving design.

1,5 / 2 / 2,5 / 3 / 4 / 5 / 6 / 8 / 10

Hexagonal ball end matt chrome-plated 9-pcs.

INFOBOX:

TORX® ball end





Based on ISO 2936L.

01418

INFOBOX: Ball end hex



Wiha hexagonal ball end

 The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.

Wiha TORX® ball end

- With optimised TORX® ball end geometry
- Increased strength thanks to the special cold forming on a system developed by Wiha especially for this purpose.
- Allows fastening and unfastening at angles up to 25°.
- Simple insertion of the tool/bit and fastening/ unfastening, especially in hard-to-reach positions.
- Broad product range: As an L-key, as a bit and as a SoftFinish® screwdriver.





Increases your efficiency: Thread-conserving removal of the screw without damage.

Hexagon with spiral drill bit 8-pcs.


405 11

| Order-No. | | 3 |
|-----------|--------------------------------------|----------|
| 03988 | | 10 |
| | 2,0 / 2,5 / 3,0 / 4 / 5 / 6 / 8 / 10 | |







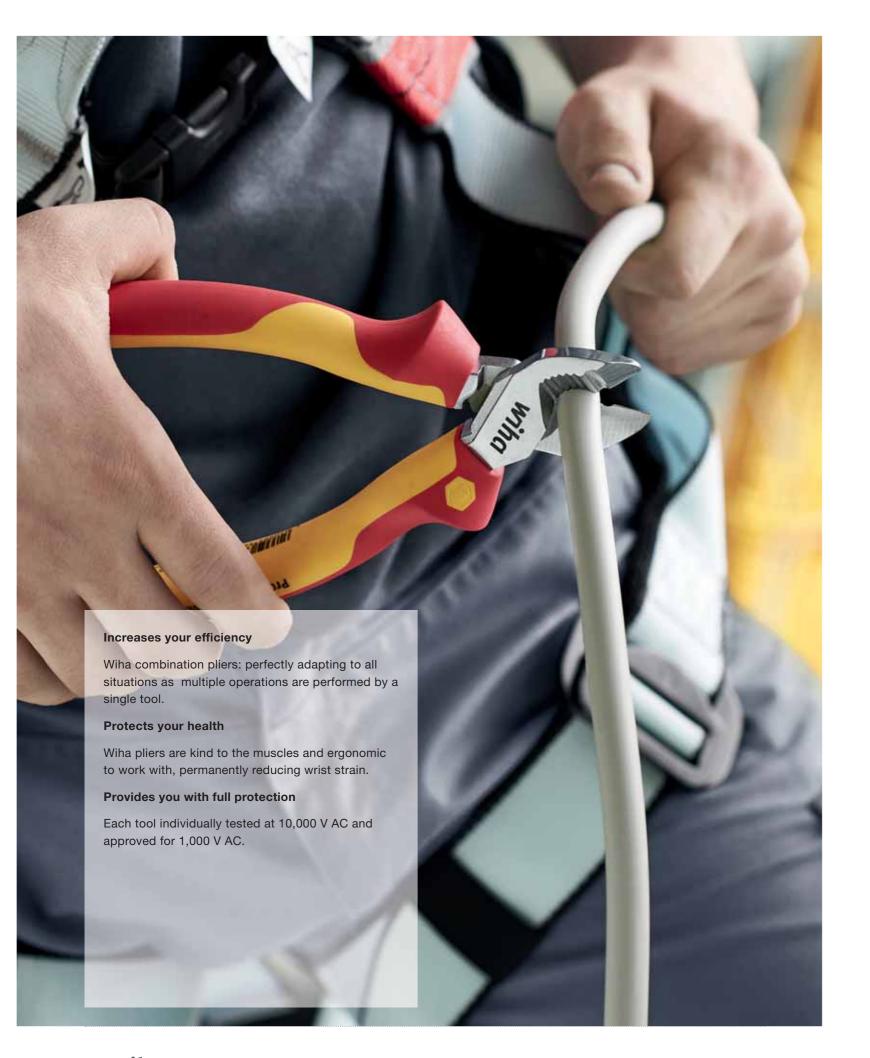



Trimming / cutting


A cut above the rest with Wiha.

A precise cut at the right time – no problem for Wiha diagonal cutters, heavy-duty diagonal cutters, cable cutters, cable shears and combination pliers. With the perfect combination of high-quality materials and ergonomic comfort, Wiha VDE-tools withstand the toughest demands. Production is in accordance to the state-of-the-art quality management guidelines. A special heat treatment and inductive hardening of the parts under high stress ensure a long lifespan. The precise interaction of the joints and the exacting quality workmanship of the blades and gripping surfaces ensure the highest level of functionality.

All Wiha products have been designed according to the latest findings in ergonomics. Ergonomic handles and well thought-out soft and hard zone distribution makes for workthat protects the hands from strain and is comfortable.

"With BiCut®, I always have sufficient power when cutting - and without aching fingers."

Timo Schweitzer

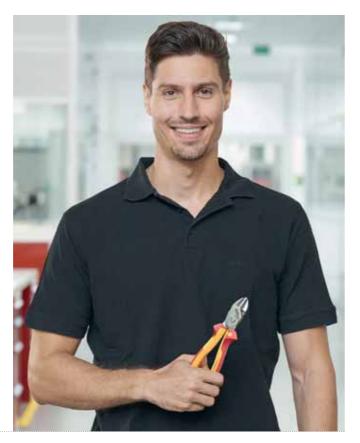






| | ŧ | |
|--|---|--------|
| | 1 | > > |
| | 9 | |
| | 8 | |
| | Ë | |
| | | |
| | | |

Double your power at the push of a button.

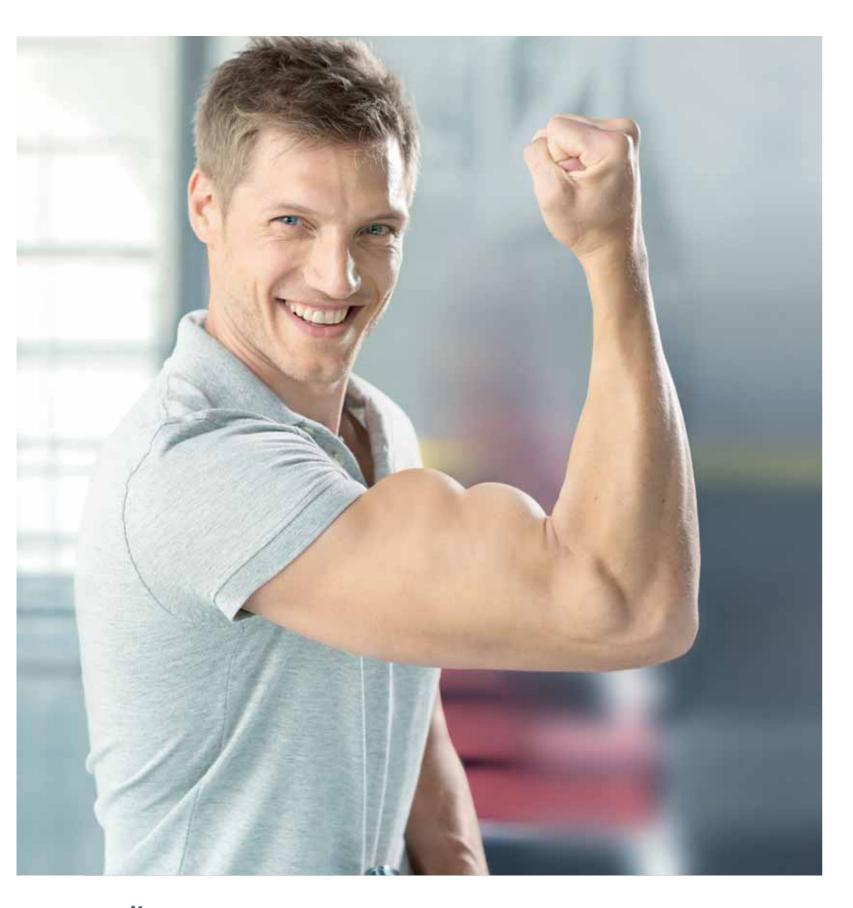

Precise and safe work – at double the power: no problem for the Wiha BiCut® Professional electric diagonal cutters. If there is not enough power when cutting, or if cutting is laborious, a simple push of a button is all that is required and the cutting power is doubled. Another push of the button, and the power is halved again - easy! This significantly reduces the risk of cramp or slippage when applying too much force. The extra-wide back for the handle, with perfectly distributed soft and hard zones, ensures the optimum ergonomics. The new Wiha BiCut® has already been awarded with the "reddot award 2014winner" for outstanding design quality. Doubles the power at the press of a button

Increases your efficiency

Two pliers in one - 200 % power at the touch of a button, available at any time.

Protects your health

Requires less force and reduces pressure on the wrists.

Provides you with full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.







BiCut® Professional electric high-performance diagonal cutters with DynamicJoint®









Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protects your health and reduces pressure on the wrists. Increases your efficiency: Two pliers in one - 200 % power at the touch of a button, a Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.



reddot award 2014 winner

Switchable

| | | | | | 2 10 0 00 |
|----------------|-------------|-------|----|-------------------|-----------|
| Order-No. | mm | | | | |
| 38191 | 200 | 8 | 21 | 3 | 5 |
| Manufactured a | acc. to IEC | 60900 | | ••••••••••••••••• | |

INFOBOX: Safety note



When working with cutting pliers - beware of wire ends flying off. Please wear safety glasses.

INFOBOX:

Cutting capacity info

| ※ | Example |
|----------|-----------------------|
| 1 - 5 | copper,aluminium |
| 6 - 10 | Iron nails |
| 11 - 15 | Screws |
| 16 - 21 | Hardened spring steel |
| | |



| DYE (S) +20% Power 21000 V IEC 60900 | | |
|--------------------------------------|--|--|
| ZZ IEC 60900 | | |
| Requires less force | | |
| able at any time. | | |
| | | |
| | | |
| | | |
| | | |
| Z 18 0 06 | | |
| 3 | | |
| 5 | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Pliers set Professional electric









Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your safety: Wiha combination pliers enable safe, non-slip gripping in all work situations. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: Wiha needle nose pliers with extra-long plier head for inserting low-lying components. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Combination pliers, needle nose pliers, diagonal cutters 3-pcs.

Z 99 0 001 06

| | 233 0 001 00 |
|------------|---|
| Order-No |). P |
| 26852 | 1 |
| Trimmin | ng / cutting |
| X | Professional electric diagonal cutters with DynamicJoint®, Tool tested at 10,000 V AC / 160mm, 6 ½" (26741) |
| Supplyi | ng / holding |
| | Combination pliers Professional electric with DynamicJoint® and OptiGrip with extra long cutting edge, Tool tested at 10,000 V AC / 180mm, 7" (26708) |
| • | Needle nose pliers Professional electric with cutting edge straight shape, Tool tested at 10,000 V AC / 200mm, 8" (26727) |
| Manufactur | ed acc. to IEC 60900. |

















Lowers your costs: Durable thanks to high-quality, chrome-plated

plier surface to prevent corrosion. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Provides you quality, chrome-plated plier surface to prevent corrosion. Protects with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Lowers your costs: Durable thanks to highyour health: Special DynamicJoint® design reduces effort required for cutting. Reduces strain from continuous work thanks to opening spring. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Z 12 1 06

| Order-No. | mm | ₩ | ≫(| Ømm | 3 | | |
|---------------------------------|-----|--------|----|-----|----------|--|--|
| 43326 | 140 | 5 1/2" | 16 | 1,6 | 5 | | |
| 43335 | 160 | 6 1/2" | 17 | 2 | 5 | | |
| 43340 | 180 | 7" | 18 | 2,3 | 5 | | |
| Manufactured acc. to IEC 60900. | | | | | | | |

with switchable opening spring

Z 16 3 06

| Order-No. | ₩₩ | $\stackrel{\longleftarrow}{\coprod}$ | ※ | Ømm | 8 | | |
|---|-----|--------------------------------------|----------|-----|---|--|--|
| 40921 | 160 | 6,5 | 17 | 2 | 5 | | |
| 41274 | 180 | 7 | 18 | 2,3 | 5 | | |
| 41279 | 200 | 8 | 19 | 2,5 | 5 | | |
| DIN ISO 5749. Manufactured acc. to IEC 60900. | | | | | | | |

INFOBOX: **DynamicJoint®**





Wiha DynamicJoint® - A new dimension in strength and durability

- Innovative: Optimised joint construction.
- Effective: Minimal power loss means less force needed for cutting.
- Permanent: Optimal performance even after thousands of cuts.

INFOBOX:

Heavy-duty diagonal cutters









with switchable opening spring

- Up to 40% more cutting force thanks to optimised
- Opening spring with on/off function for fatigue-free
- Opening spring can be activated with just one hand.



Cable cutter Professional electric





Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Clean work thanks to cable cutting without crushing. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Z 50 1 06

| Order-No. | ₩₩ | ₩ | ※ | mm² | 8 | |
|---------------------------------|-----|-----|----------|-----|---|--|
| 34743 | 160 | 6 ½ | 16 | 50 | 5 | |
| 34744 | 200 | 8 | 20 | 60 | 5 | |
| Manufactured acc. to IEC 60900. | | | | | | |

High-leverage combination pliers Professional electric with DynamicJoint® and OptiGrip



Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Lowers your costs: Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra long cutting edge

Z 02 0 06

| Order-No. | | | - | Ømm | 3 |
|---------------|-----|---|----|-----|----------|
| 26714 | 200 | 8 | 18 | 2.3 | 5 |
| 26717 | 225 | 9 | 19 | 2.5 | 5 |
| DIN ISO 5746. | | | | | |

Combination pliers Professional electric with DynamicJoint® and









Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations.

Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra long cutting edge

Z 01 0 06

| Order-No. | | ₩ | | Ømm | 3 | | | |
|---|-----|-----|----|-----|----------|--|--|--|
| 26705 | 160 | 6 ½ | | 1.6 | 5 | | | |
| 26708 | 180 | 7 | 16 | 1.8 | 5 | | | |
| 26711 | 200 | 8 | 17 | 2 | 5 | | | |
| DIN ISO 5746. Manufactured acc. to IEC 60900. | | | | | | | | |

INFOBOX: **OptiGrip**





Wiha OptiGrip - optimal grip due to newly designed gripping surfaces

- A firm hold: The "triple-point support" protects the workpiece from twisting or slipping.
- Highly effective: Optimum grip even with large jaw opening - and at the same time significantly less force
- A wide selection: Now in standard Wiha combination pliers and high leverage combination pliers.











Meets your requirements: For almost flush cutting of soft and semi-hard wires. Protects your health: Reduced risk of injury thanks to smooth burr-free finished results, for example with cable ties.

Meets your requirements: For the smooth and flush cutting of plastics. **Protects your health:** Reduced risk of injury thanks to smooth burr-free finished results, for example with cable ties.

with opening spring

| | | | | | = :: = =: |
|---------------|-----|---|----|---|-----------|
| Order-No. | | ₩ | ≫(| Ømm | 8 |
| 36189 | 125 | 5 | 7 | 0.8 | 5 |
| DIN ISO 5749. | * | | * | *************************************** | |

$_{\rm Z\,44\,3\,01}$ with opening spring without bevelled edge

| with open | ing spi | relled edge Z 15 0 01 | | |
|---------------|---------|-----------------------|----------|---|
| Order-No. | ₩₩ | ₩ | ※ | 3 |
| 37402 | 125 | 5 | 2 | 5 |
| 37403 | 160 | 6 ½ | 3 | 5 |
| DIN ISO 5743. | | | | |





Simplifies your work: Large blade notch and micro-toothed cutting handle with extra large handle holes enable users to make a flawless cut into cables up to 50 mm². Increases your efficiency: Shear for electricians with stripping, skinning, crimping & cutting-to-length functions in a single tool.

Lowers your costs: Durable and sturdy thanks to bimetallic saw edge prevent the cable from slipping out of the shears. Increases your blade. Facilitates handling: The ergonomic handle is suitable for both safety: Protective cover with retaining clip for safe carrying. Facilitates right- and left-handed users* Using the plastic screw, the saw blade handling: The combination between a sturdy blade and an ergonomic can be changed quickly and easily. Increases your efficiency: The fine-toothed saw blade allows a clean cut, for example on plastic pipes and metal cable ducts. Provides you with full protection: Each tool individually tested at 10,000 V AC and usable for 1,000 V AC.

with crimp function in blister pack


| | | | Z /1 / (|
|-----------|-----|-----|--------------|
| Order-No. | | mm² | 3 |
| 41923 | 160 | 50 | 5 |

insulated with three saw blades 150 mm


| moula | ica witii | | out blue | 2461 |
|-------|-----------|-----|----------|------|
| | No. | | | 8 |
| 43125 | 150 | 280 | Х | 1 |





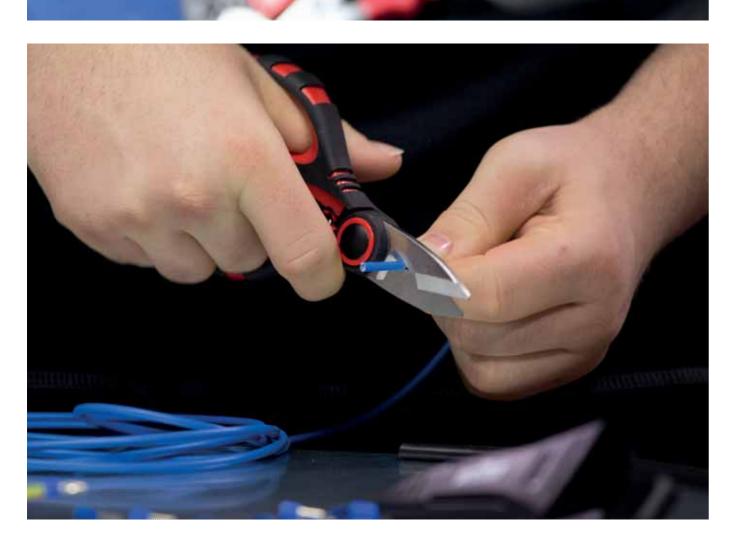



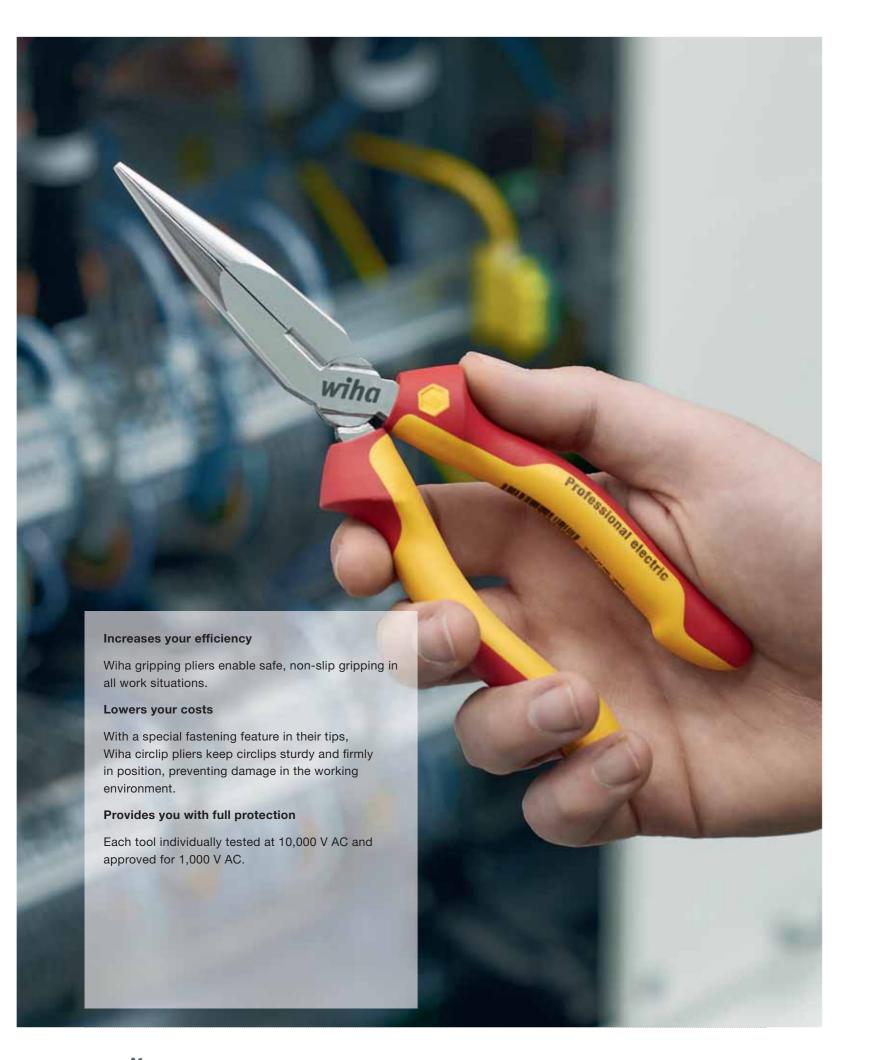




Supplying / holding

Supplying – completely relaxed.

In the supplying and holding working procedures, Wiha pliers prove to be clever helpers for relaxed and efficient work. For instance, the OptiGrip of the combination and high-leverage combination pliers ensure optimal and secure holding using an innovative gripping surface: The unique 'triplepoint support' protects the work piece from twisting or slipping. The circlip pliers from the Classic Series with their MagicTips® precision tips made of high-performance steel offer considerable additional safety and stability. Their special latching function is especially useful against in preventing the circlips jumping off.

"You only have to lose a circlip, and then you realize the benefits of Wiha pliers!" Frank Scheck

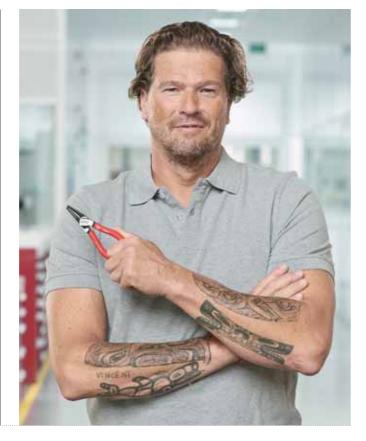











Z 05 0 06

Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Extralong plier head for inserting low-lying components. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge straight shape

| Order-No. | | Ħ | - | Ømm | | |
|---|-----|-----|----|-----|---|--|
| 26720 | 160 | 6 ½ | 16 | 1.2 | 5 | |
| 26727 | 200 | 8 | 17 | 1.6 | 5 | |
| DIN ISO 5745 Manufactured acc. to IEC 60900 | | | | | | |

Combination pliers Professional electric with DynamicJoint® and









Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra long cutting edge

| with extra long cutting edge Z 01 0 06 | | | | | | | |
|---|-----|----------|----------|-----|---|--|--|
| Order-No. | ₩₩ | ₩ | ※ | Ømm | 8 | | |
| 26705 | 160 | 6 ½ | 15 | 1.6 | 5 | | |
| 26708 | 180 | 7 | 16 | 1.8 | 5 | | |
| 26711 | 200 | 8 | 17 | 2 | 5 | | |
| DIN ISO 5746. Manufactured acc. to IEC 60900. | | | | | | | |



Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Extralong plier head for inserting low-lying components. Provides you with **full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





Meets your requirements: Permanently stable through box joint with double guidance. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Increases your efficiency: Fast and simple adjustment of pliers with push button. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge curved shape, approx. 40°

| | | | | | 2 05 1 0 | |
|---|-----|-----|----|-----|----------|--|
| Order-No. | | | _ | | 8 | |
| 26728 | 160 | 6 ½ | 16 | 1.2 | 5 | |
| 26729 | 200 | 8 | 17 | 1.6 | 5 | |
| DIN ISO 5745 Manufactured acc. to IEC 60900 | | | | | | |

with push button adjustment

| | | | | | Z 22 0 0 | | |
|---|-----|----|---|----|----------|--|--|
| Order-No. | | | | | 3 | | |
| 37450 | 250 | 10 | 2 | 50 | 5 | | |
| DIN ISO 8976. Manufactured acc. to IEC 60900. | | | | | | | |



High-leverage combination pliers Professional electric with









Z 02 0 06

Simplifies your work: Up to 40% more cutting force thanks to optimised leverage. Lowers your costs: Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Increases your efficiency: A secure, non-slip grip in all standard work situations. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with extra long cutting edge

| Order-No. | ₩₩ | ₩ | ≫(| Ømm | |
|-----------------|-----|---|----|-----|---|
| 26714 | 200 | 8 | 18 | 2.3 | 5 |
| 26717 | 225 | 9 | 19 | 2.5 | 5 |
| DIN ISO 5746. N | | | | | |

Long flat-nose pliers Professional electric





Increases your efficiency: Extra-long plier head for inserting low-lying components. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| | | | 207000 | | |
|---|-----|-----|----------|--|--|
| Order-No. | ₩m | ₩ | * | | |
| 26732 | 160 | 6 ½ | 5 | | |
| DIN ISO 5745. Manufactured acc. to IEC 60900. | | | | | |

Water pump pliers Professional electric





Meets your requirements: Permanently stable through box joint with double guidance. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Provides you with **full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

box type

| | | | Z 21 0 0 | | | | | |
|---|-----|----|----------|----|---|--|--|--|
| Order-No. | ₩mm | Ħ | 0; | 0; | 8 | | | |
| 33520 | 250 | 10 | 2 | 50 | 5 | | | |
| DIN ISO 8976. Manufactured acc. to IEC 60900. | | | | | | | | |





Increases your efficiency: Extra-long plier head for inserting low-lying components. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| | | | Z 09 0 06 | | |
|---|-----|-----|-----------|--|--|
| Order-No. | ₩m | ₩ | 8 | | |
| 26735 | 160 | 6 ½ | 5 | | |
| DIN ISO 5745. Manufactured acc. to IEC 60900. | | | | | |





| þ | | |
|---|--|--|
| | | |
| | | |
| ä | | |
| | | |
| | | |

Inomic® electric combination pliers









Protects your health: Ergonomic handling enables users to work longer whilst protecting muscles. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Pliore wrongh Classic



Simplifies your work: Self-locking at AF 17 and above. Also suitable for left-handed users as operated without side push button. Lowers your costs: Minimises wear and prevents damage to sensitive surfaces thanks to smooth, parallel jaws and backlash-free handling. Saves space: Replaces a set of metric and imperial open-ended spanners. Protects your health: Compaction and bending tasks take minimum effort thanks to manual force increased tenfold. Saves time: Safe, rapid setting directly on the work piece with no need to press any buttons. Ratchet function allows users to fasten screws instantly with a simple glide. Improved access: Slender design thanks to button-free setting enables it to be used in confined working environments, minimising the risk of damage.

| 7 | \cap 1 | \cap | 4. | 0 |
|---|----------|--------|----|---|

| Order-No. | Тур | ≫(| Ømm | 2 |
|-----------|-----|----|-----|----------|
| 33261 | 180 | 12 | 1.6 | 5 |

| | | | | |
|---|-----|------------|------|--------|
| - | ← → | A 4 | | \sim |

| Order-No. | mm | ₩ | 0; | | • |
|---|-----|----|----|--|---|
| 40923 | 250 | 10 | 46 | | (|
| *************************************** | • | | | | *************************************** |

Needle nose pliers Inomic® VDE



with cutting edge and stripping points

Z 06 0 16



Z 25 0 01

 Required width setting directly on the work piece with no need to press any buttons


INFOBOX: Plier wrench

- Ratchet principle allows users to fasten screws rapidly with a simple glide.
- Thanks to its slim design and button-free setting, it is ideal for use in tight spaces.
- Smooth, parallel-acting jaws prevent damage on sensitive surfaces.




1,000 V AC.



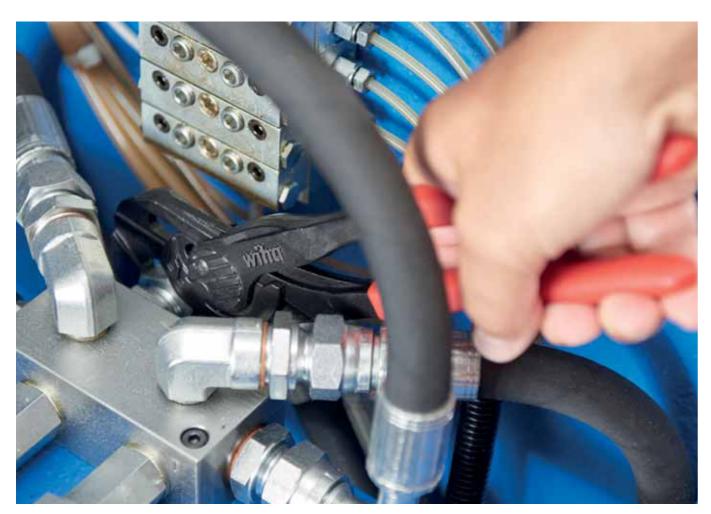



For those situations where a good grip is essential.

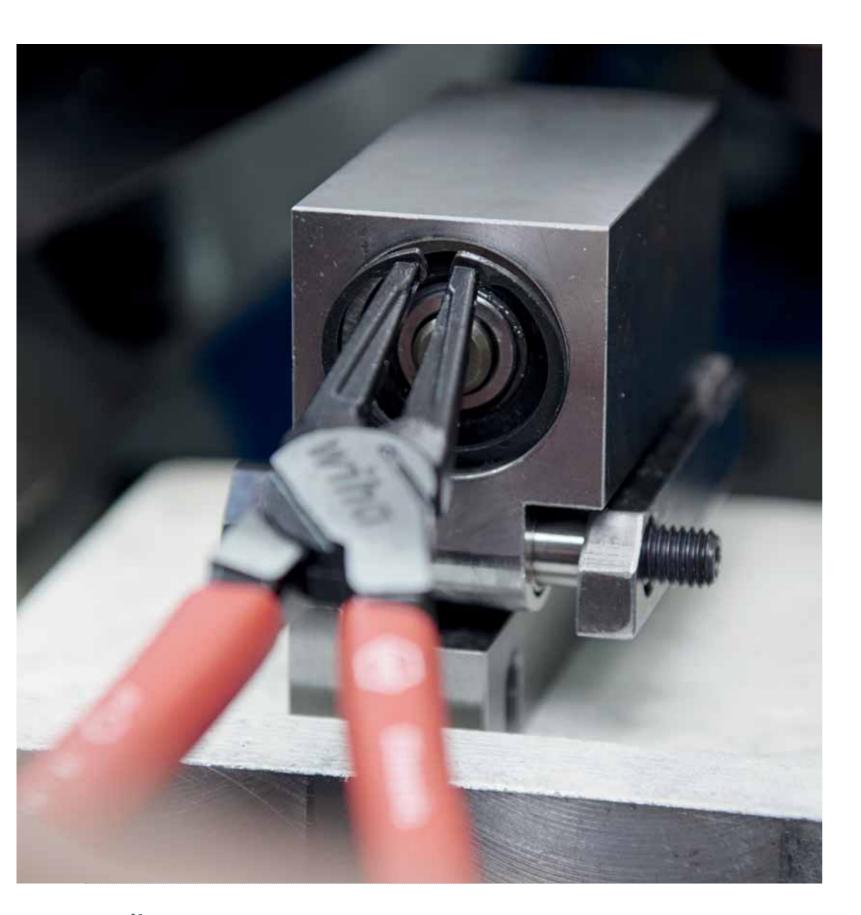



They make our circlip pliers for the Classic series head and shoulders above the rest: MagicTips®, the precision tips made of high-performance steel. Additionally hardened, they offer a high level of resistance to wear and therefore ensure a long shelf-life. The special latching feature is as unique as it is useful, and prevents jumping of the circlips and therefore any reworking in the motor or working space caused by lost circlips. And thanks to the non-slip pliers handle, precise work is also guaranteed in unfavourable situations. Hard as nails, durable, safe, accurate: These qualities make Wiha MagicTips® circlip pliers useful and indispensable helpers during day-to-day work.

Lowers your costs

Prevents damage caused by lost circlips in the work area.

Saves time

Safe and sturdy grip on circlips.







Pliers set Classic with MagicTips®





Lowers your costs: Prevents damage caused by lost circlips in the work area. Saves time: Safe and sturdy grip on circlips.

Circlip pliers 4-pcs.

| Circlip pliers 4-pcs. | Z 99 0 007 01 |
|-----------------------|---------------|
| Order-No. | *** |
| 34708 | 1 |

Supplying / holding

Circlip pliers Classic with MagicTips® For inner rings (drill holes) J 1, 140mm (34689) / J 2, 180mm (34690)


Circlip pliers Classic with MagicTips® For outer rings (shafts) A 1, 140mm (34699) / A 2, 185mm (34700)

with safety latching function

INFOBOX:





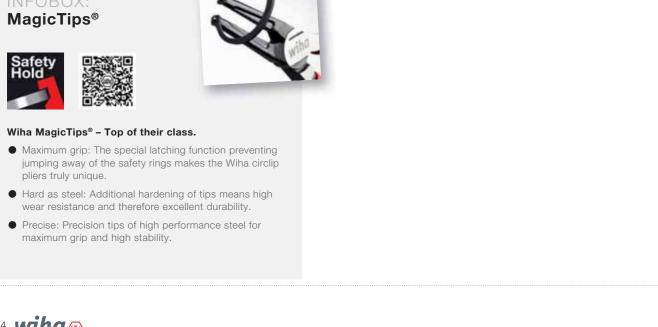



Classic circlip pliers with MagicTips®, angled





Lowers your costs: Prevents damage caused by lost circlips in the work area. **Saves time:** Safe and sturdy grip on circlips.

Lowers your costs: Prevents damage caused by lost circlips in the work area. **Saves time:** Safe and sturdy grip on circlips.

For inner rings (drill holes)

| | | | - | | 2 33 4 0 |
|-----------|------|-----|-----|--------|----------|
| Order-No. | Тур | ₩m | ₩ | ೮ | 3 |
| 34688 | JO | 140 | 5 ½ | 8-13 | 5 |
| 34689 | J 1 | 140 | 5 ½ | 12-25 | 5 |
| 34690 | J 2• | 180 | 7 | 19-60 | 5 |
| 34691 | J 3• | 220 | 9 | 40-100 | 5 |
| 34692 | J 4• | 305 | 12 | 85-140 | 5 |
| | | | | | |

with safety latching functionDIN ISO 5256.

For inner rings (drill holes)

| i oi iiiiiei | illiga (| Z 33 5 01 | | | |
|--------------|----------|-----------|-----|--------|----------|
| Order-No. | Тур | ₩m | ₩ | ೦ | ₽ |
| 34693 | J 01 | 140 | 5 ½ | 8-13 | 5 |
| 34694 | J 11 | 140 | 5 ½ | 12-25 | 5 |
| 34695 | J 21• | .00 | 7 | 19-60 | 5 |
| 34696 | J 31• | | 9 | 40-100 | 5 |
| 34697 | J 41• | | | 85-140 | 5 |

with safety latching functionDIN ISO 5256.

Classic circlip pliers with MagicTips®, straight







Lowers your costs: Prevents damage caused by lost circlips in the work area. **Saves time:** Safe and sturdy grip on circlips.



Lowers your costs: Prevents damage caused by lost circlips in the work area. **Saves time:** Safe and sturdy grip on circlips.

For outer rings (shafts)

| | 90 (| 0 | Z 34 4 0 | | |
|------------------------------------|------|---------------------------------|----------|--------|----------|
| Order-No. | Тур | $\stackrel{\longleftarrow}{mm}$ | ₩ | ೮ | ₽ |
| 34698 | Α0 | 140 | 5 ½ | 7-10 | 5 |
| 34699 | A 1 | 140 | 5 ½ | 10-25 | 5 |
| 34700 | A 2• | 185 | 7 | 19-60 | 5 |
| 34701 | A 3• | 240 | 9 | 40-100 | 5 |
| 34702 | A 4• | 300 | 12 | 85-140 | 5 |
| with safety la | | | | | |

For outer rings (shafts)

| | | | | | 2 34 3 0 1 |
|------------------------------------|-------------|----------|---------|------------|------------|
| Order-No. | Тур | ₩mm | ₩ | $^{\circ}$ | ≗ |
| 34703 | A 01 | 140 | 5 ½ | 7-10 | 5 |
| 34704 | A 11 | 140 | 5 ½ | 10-25 | 5 |
| 34705 | A 21• | 185 | 7 | 19-60 | 5 |
| 34706 | A 31• | 240 | 9 | 40-100 | 5 |
| 34707 | A 41• | 300 | 12 | 85-140 | 5 |
| with safety la | atchina fun | ctionDIN | ISO 525 | 4. | |








Stripping/insulating/crimping

For tidy cable ends.

It is particularly important to have an exacting, process-reliable approach when crimping to prevent fiddly wire-end sleeves snagging or twisting all the time. Wiha crimping tools guarantee a clean, precise crimping of components. The worker's pressure force is automatically adjusted. Only slight hand strength is required thanks to optimum transmission. These tools are suitable for handling a whole variety of components, from cable eyes and contacts through to male blade connectors. The automatic electric crimping pliers particularly impress with a feed and automatic adjustment to the wire-end sleeve size. Hexagonal crimping prevents wire-end sleeves from twisting in the pliers.


"The automatic crimping pliers allow me to do my work much more quickly without the fiddly wire-end sleeves snagging or twisting all the time." Ralf Flaig

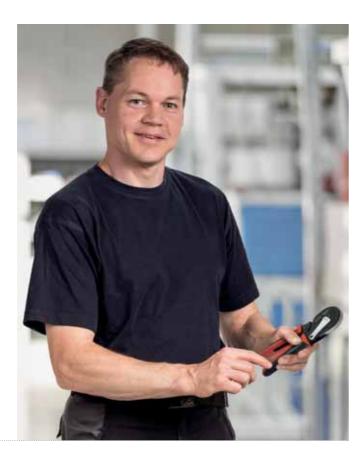





Three functions – one tool.

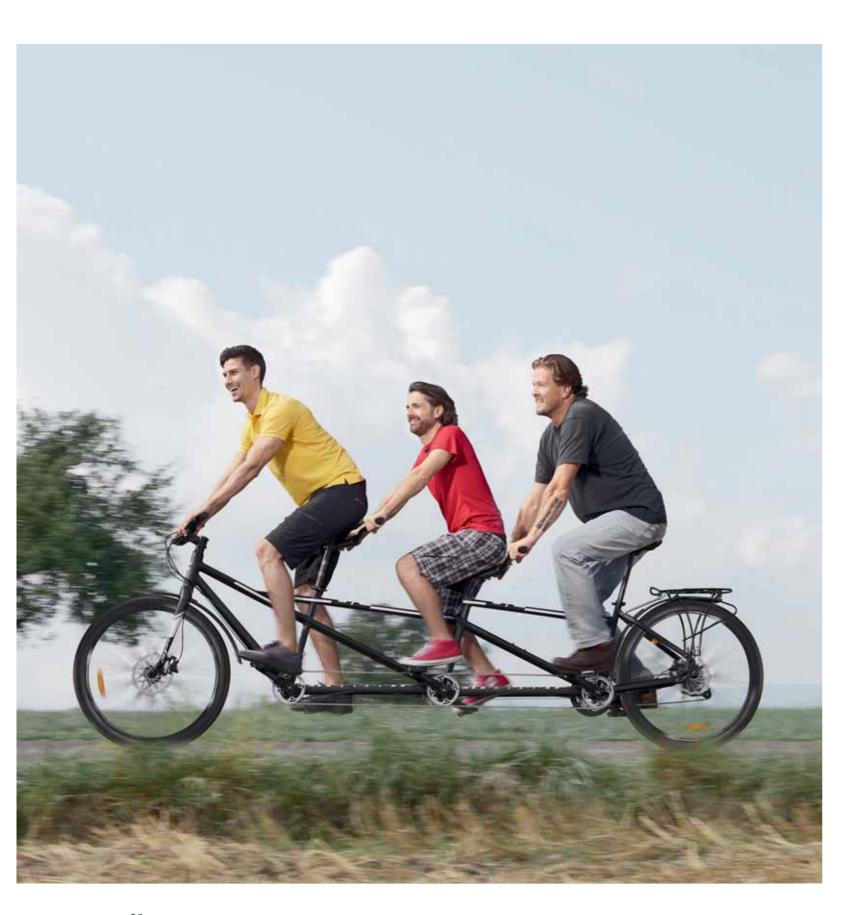



Less tools means less weight, better handling and more efficient work. The Wiha Professional electric TriCut installation pliers combine three tools in one, ideal for the three operations cutting-to-length, stripping and skinning. And it does all this while saving you energy: Due to an ergonomically shaped, specifically angled plier head forged from high-quality steel. The low-wear, inlaid joint with heavy-duty riveting makes the pliers particularly robust and durable, and production and testing according to IEC 60900, VDE/ GS certification and individual piece testing at 10,000 V AC ensures uncompromising safety.

Cutting Stripping Insulation Skinning Skinning

Simplifies your work

The angled shape of the head allows work to be performed in hard-to-reach spaces such as installation boxes.

• Increases your efficiency

Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency.

Lowers your costs

Now you only need one tool for three tasks: cutting to length, stripping and skinning.

• Provides you with full protection

Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.





crimping

Installation pliers TriCut Professional electric







Simplifies your work: The angled head allows you to work in hard-to-reach places such as installation sockets. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Saves money: Now you only need one tool for three tasks: cutting to length, stripping and skinning. Increases your efficiency: Three tools in one. Saves 60% volume and 50% less weight for 100% efficiency. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

Stripping diagonal cutters Professional electric with DynamicJoint®











Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Saves money: Two tools in one for cutting to length and skinning. Protects your health: Special DynamicJoint® design reduces effort required for cutting. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| | | | | | Z 55 0 06 | | | |
|---|-----|-----|---|-----|-----------|--|--|--|
| Order-No. | ₩m | ₩ | Ø | mm² | 3 | | | |
| 26847 | 100 | 6 ½ | 5 | 10 | 5 | | | |
| DIN ISO 5743. Manufactured acc. to IEC 60900. | | | | | | | | |

| | | | | | Z 14 0 06 | | | |
|---|-----|-----|----|-----|-----------|--|--|--|
| Order-No. | ₩mm | | | Ømm | 3 | | | |
| 26745 | 160 | 6 ½ | 13 | 1.6 | 5 | | | |
| DIN ISO 5749. Manufactured acc. to IEC 60900. | | | | | | | | |

| ※ | Example | |
|----------|-----------------------|--|
| 1 - 5 | copper,aluminium | |
| 6 - 10 | Iron nails | |
| 11 - 15 | Screws | |
| 16 - 21 | Hardened spring steel | |





Saves money: Two tools in one for cutting to length and skinning. Protects your health: Ergonomic handling enables users to work longer whilst protecting muscles. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

with cutting edge and stripping points

| | | | | • • | Z 06 0 16 |
|----------------|------------|----------|-----|-----|-----------|
| Order-No. | Тур | ≫(| Ø | | * |
| 33259 | 160 | 12 | 1,6 | | 5 |
| Manufactured a | icc. to IE | C 60900. | • | | |



Simplifies your work: Perfect handling thanks to ergonomic handle shape. Saves time: Automatic setting from round to length cutting. Increases your efficiency: Skinning of all standard cross-sections through continuous setting.

with self-rotating trailing blade

| | ₩₩ | | Ømm | 3 |
|-------|-----|----|--------|----------|
| 35969 | 165 | 6½ | 4,0-28 | 1 |



Simplifies your work: Enables stripping in hard-to-reach places such as installation sockets.

for round cable, in blister pack

| | | | | | 24077 |
|-----------|-----|---|------|----|-------|
| Order-No. | ₩₩ | | mm² | SB | 8 |
| 36052 | 125 | 5 | 8-13 | Х | 1 |

Cable stripping knife





Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

straight cutting edge for round cables in blister pack

| J | 5 | 3- | | | 2468 |
|----------------|------------|---------|----|---|------|
| Order-No. | ₩m | ₩ | SB | 3 | |
| 38798 | 200 | 8 | X | 1 | |
| Manufactured a | acc. to IF | C 60900 | | | |

Cable stripping knife





Lowers your costs: No damage to wire insulation through sliding shoe

hooked blade with sliding shoe for round cable, in blister pack

| | | | | 24076 | |
|---------------------------------|-----|---|---|-------|--|
| Order-No. | | | | 8 | |
| 36053 | 200 | 8 | Х | 1 | |
| Manufactured acc. to IEC 60900. | | | | | |

24622



Simplifies your work: Enables incremental cable stripping and skinning in hard-to-reach places such as installation sockets.

for coaxial cable, in blister pack

| | | | | | 2407 |
|-----------|---|------|---------|------|---|
| Order-No. | ₩m | ₩ | mm² | SB] | 3 |
| 36051 | 110 | 41/4 | 4,8-7,5 | Х | 1 |
| | *************************************** | | | | *************************************** |







Stripping tool automatic













Simplifies your work: Unrestricted access to hard-to-reach work areas thanks to extremely slim handle shape. Saves money: Two tools in one for cutting to length and skinning. Increases your efficiency: Damage-free stripping thanks to automatic adjustment to cable




up to 16 mm² in blister pack

| | | | | | | 201 |
|-----------|-----|---|-----------|------|----|-----|
| Order-No. | ₩₩ | ₩ | mm² | AWG | SB | *** |
| 42062 | 200 | 8 | 0.03 - 16 | 32-5 | Y | 1 |


| Order-No. |
|-----------|
| |
| 36050 |
| |





| | ₩ | ← | mm² | AWG | SB . | |
|--|---|----------|-----|-----|------|--|
|--|---|----------|-----|-----|------|--|

24675

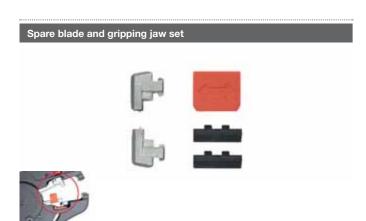

for automatic stripping tool

42162

Z 57 0 001 06K Order-No.

INFOBOX:







- These pliers can handle a wide range of cables, thus combining two pairs of pliers in one.
- The supplied damper can be used to lessen recoil caused by larger cable gauges, such as those greater than 6 mm², thus helping to protect wrists.
- Precise cutting to length thanks to adjustable longitudinal stop.
- Integrated hand protection along the cutting edge guards against injury.







Lowers your costs: An integrated lever enables users to interrupt the crimping process at any time to protect the pliers. **Increases your safety:** Safe work through feed aid prevents crimping the plastic cover of wire-end sleeves. Facilitates handling: Thanks to hexagonal crimping, small wire-end sleeves no longer get caught. **Increases your efficiency:** Automatic adjustment of wire-end sleeve size with suitable crimping force for a large coverage area of 0.08-16mm².

for wire-end sleeves hex crimping

| for wire-end sleeves hex crimping Z 62 0 06 | | | | | |
|---|-----|---------|-----|---|--|
| Order-No. | mm | mm² | AWG | | |
| 41246 | 210 | 0,08-16 | | 1 | |

For processing twin sleeves and wire-end sleeves with or without insulating collar as per DIN 46228 & EN 50027



Increases your safety: Safe working through automatic pressing adjustment.

for insulated cable eyes and contacts

| for insulated cable eyes and contacts Z 62 0 06 | | | | | | | |
|--|-----|-------|-------|---|--|--|--|
| Order-No. | ₩m | mm² | AWG | | | | |
| 33841 | 220 | 0,5-6 | 20-10 | 1 | | | |
| For processing of red, blue and yellow isolated cable eyes, pin-end cable connectors, contact pins, contact pins leeves, circular pins, circular pin sleeves, batch connectors and parallel connectors according to DIN 46234. | | | | | | | |



Increases your safety: Safe working through automatic pressing adjustment.

| | | | | Z 62 0 06 | | |
|--|-----|---------|------|-----------|--|--|
| Order-No. | mm | mm² | AWG | 8 | | |
| 33844 | 220 | 0,14-16 | 26-5 | 1 | | |
| For processing of wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027. | | | | | | |

for wire-end sleeves



Increases your safety: Safe working through automatic pressing adjustment.

for non-insulated cable eye with closed sleeve

| | | | | Z 62 0 |
|-----------|-----|--------|------|----------|
| Order-No. | mm | mm² | AWG | 3 |
| 33843 | 220 | 0,1-16 | 26-6 | 1 |

For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.





Increases your safety: Safe working through automatic pressing adjustment.

for non-insulated male blade connectors



For processing of non-isolated contact pins and contact pin sleeves according to DIN 46247 for standardised, solderless electrical connections.



Meets your requirements: Safe pressing in marked trapezoidal/ semi-circular profiles. Lowers your costs: Durable thanks to high-quality, chrome-plated plier surface to prevent corrosion. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

| | | | | Z 60 0 06 | |
|---|-----|---|---------|-----------|--|
| | ₩m | | mm² | 3 | |
| 35862 | 180 | 7 | 0,25-16 | 5 | |
| DIN ISO 5743, Manufactured acc. to IEC 60900. | | | | | |

Crimping pliers Professional electric




Meets your requirements: Safe pressing in marked trapezoidal/ semi-circular profiles. Lowers your costs: Durable thanks to highquality, chrome-plated plier surface to prevent corrosion. Provides you with full protection: Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.


| | | | | Z 60 0 06 |
|--------------|---------|-----------|--------------|-----------|
| Order-No. | ₩₩ | ₩ | mm² | ₽ |
| 35861 | 145 | 5 ¾ | 0,25-2,5 | 5 |
| DIN ICO 5749 | Manufac | turod ooo | to IEC 60000 | |





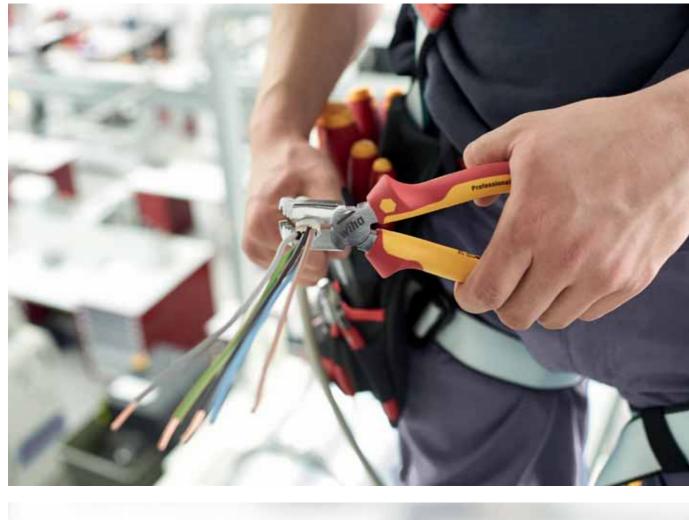



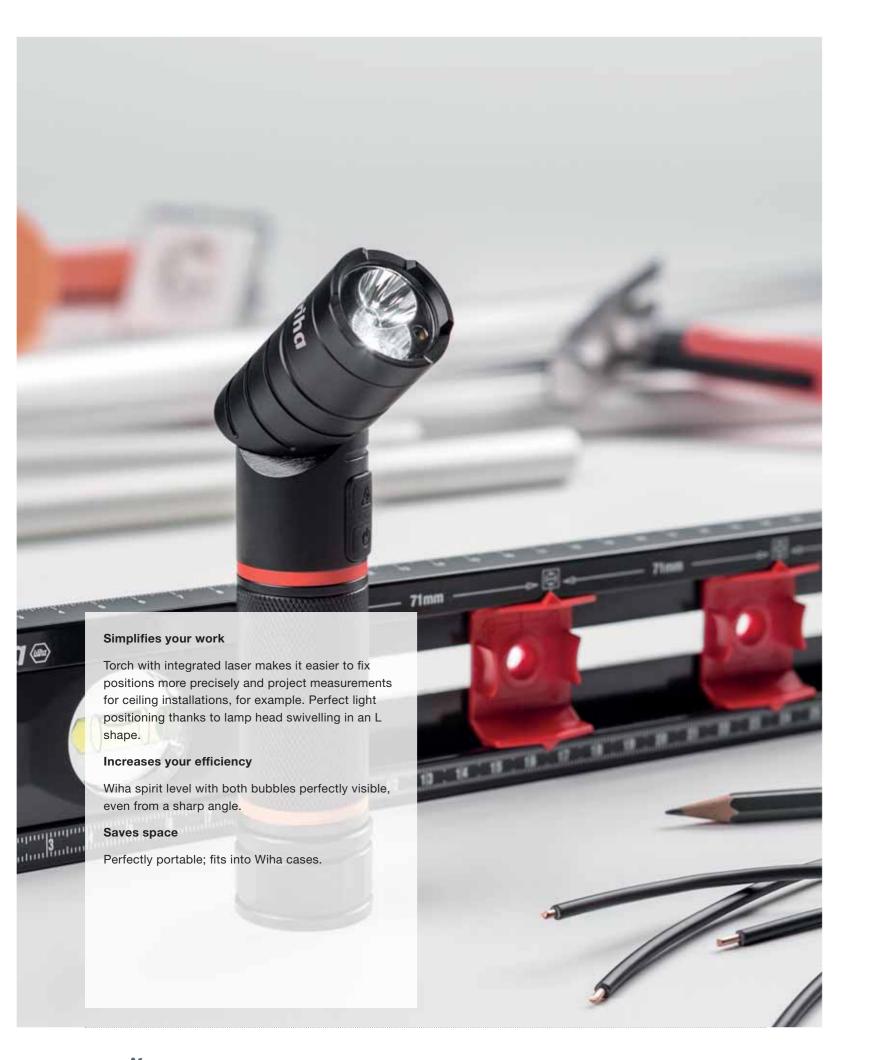



Surveying/marking/measuring/checking

This is what we call precision work made to measure.


Wiha measurement and testing devices prove to be dependable helpers during electrical installation work. The multi-functional torch impresses in three ways thanks to its integrated laser, UV light and LED light with two lighting levels. With variable distance marks, the Wiha electrician's spirit level can reach across up to four flush boxes. Thanks to its ingeniously positioned scale, it allows users to make measurements effortlessly from different work positions. Users are guaranteed to see bubbles perfectly, even from a sharp angle. The Wiha electrician's folding ruler provides a scale for up to three flush boxes and edge distance marking at 150 mm. It can also be used to route cables into hard-to-reach installation locations. With its florescent coating, the folding ruler is also quick and easy to find in the dark with a UV light.

"The Wiha spirit level is a big hit! I can see the bubbles perfectly even when taking measurements above my head. I can also mark out measurements without needing to take a break."
Ralf Kästle



Surveying/ marking/ measuring/ checking



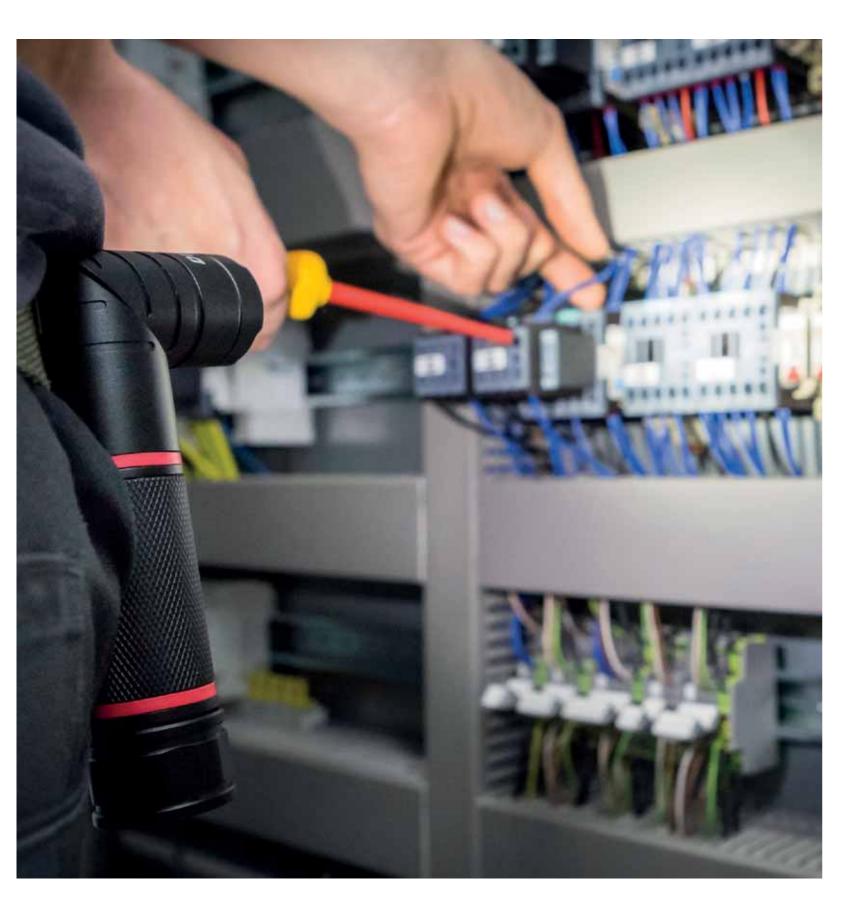

Even the most experienced professional tradesmen find it difficult to work efficiently in poorly lit work environments. The Wiha multi-functional torch sheds light on things in three ways: It features an integrated laser, UV light and LED light with two lighting levels. It is thus a compact, universal work tool which replaces several instruments in a single device. The integrated laser offers a great advantage, providing detailed positioning and easy transmission of measurements for tasks such as ceiling installations. This torch is even more practical for portable use thanks to the retaining clip, magnetic positioning and swivelling lamp head used to point the light in the required direction. Compact, light and multi-functional, the Wiha torch ensures optimum illumination for perfect vision and positioning.

Simplifies your work

Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks.

• Simplifies your work

Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape.

• Increases your efficiency

Very strong LED lamp - two light intensities to adjust to light conditions as required. Includes laser and UV light.

• Increases your safety

Power-on time of 2 seconds prevents the laser being activated by accident.







Flashlight with LED, laser and UV light




Simplifies your work: Retaining clip and magnetic positioner on the lid allows you to keep hands free for other tasks. Integrated laser makes it easier to fix position more precisely and project measurements for ceiling installations, for example. Perfect light positioning thanks to lamp head swivelling in an L shape. Increases your safety: Power-on time of 2 seconds prevents the laser being activated by accident. Increases your efficiency: Very strong LED lamp – two light intensities to adjust to light conditions as required. Includes laser and UV light.

in blister pack, including 3 AAA batteries

24670

| Order-No. | LED | * | UV | | SB |
|-----------|--------------|---------|--------------|-----------|----|
| 41286 | 100 / 310 lm | Close 0 | 390 - 400 nm | 3 x AAA | |
| 41200 | 100/3101111 | Class 2 | 390 - 400 NM | batteries | Х |

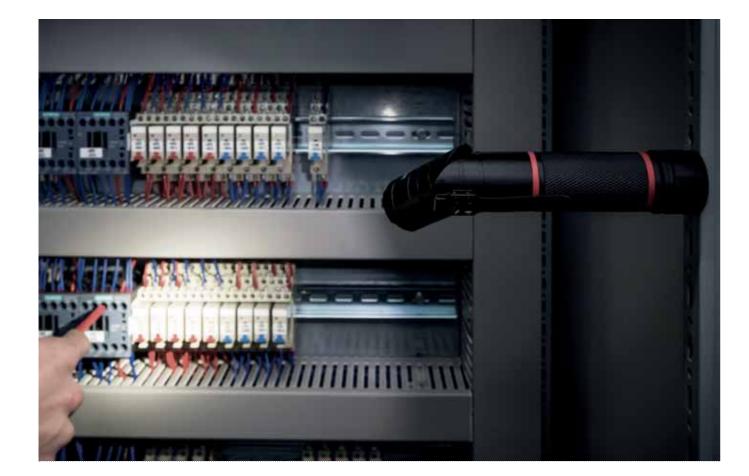



Torque QuickCheck torque testing device







Increases your safety: Checking your torque tool regularly guarantees safe, precise work with the correct torque. **Saves time:** LED traffic light system displays results in a way which is quick and easy to understand. **Increases your efficiency:** Fast, easy checking of your torque tool thanks to mobile, compact shape.

with adapter blades and batteries in box

| - | | | | 2909 |
|-------|-----|-----|----|------|
| | Nm | ₩ % | SB | |
| 42086 | 2,8 | 2 | Х | 1 |







Voltage tester Volt Detector non-contact, single-pole, 230-1,000 V AC



Simplifies your work: Voltage tester operational at all times through automatic activation. **Increases your efficiency:** Fast voltage testing thanks to non-contact measurement within a field of 4mm.

| Order-No. | •1 | mm | 8 |
|-------------|-----|-----|----|
| 37871 | 4,2 | 149 | 10 |
| IFC 61010-1 | | | |









Simplifies your work: Integrated with cable retractor for cables between 3-7mm. Lowers your costs: Ruler quick and easy to find – even in dark environments with a UV light. Increases your efficiency: Ruler with integrated distance marks for up to 3 flush boxes. Provides you with full protection: Tool tested at 10,000 V AC and suitable for 1.000 V AC.

metric, 10 segments

| | _ | | 410200 |
|-----------|----|--------|----------|
| Order-No. | | ∢œ | 3 |
| 42068 | 15 | orange | 10 |

wiha

Folding ruler LongLife Plus Composite 2 m

Voltage tester SoftFinish® single-pole, 110-250 volts





Increases your efficiency: Stable and as robust as a fully-fledged screwdriver. **Provides you with full protection:** Each tool individually tested at 10,000 V AC and approved for 1,000 V AC.

⊖Slotted transparent, with push-on clip

| \circ | | | | • | | 255-1 |
|------------------|-----------|------------|----------|-----------|--------------|----------|
| Order-No. | Θ | ⇒ • | ⊖; | mm | - | 3 |
| 34745 | 3,0 | 60 | 0,5 | 140 | 19 | 10 |
| Tested according | ng to DIN | V 57680-6 | 6, GS, C | E complia | int. | |

metric, 10 segments

410 2005

| Order-No. | ‡[| ∢Œ | 3 |
|-----------|----|------------|----------|
| 37067 | 15 | red/ black | 10 |

in the second contract of the second contract



Testing pen for AC voltages.

- Testing pen detects AC voltages of up to 230 V AC
- A bright red LED indicates AC voltages
- A current flow through the user's body is not necessary
- Complies with IEC 61010-1 safety standard: Measuring category CAT III 1,000 V
- Detects AC voltages within a field of 4 mm.
- CE compliant



Electrician's spirit level









Simplifies your work: Comfortable measurement in different work positions thanks to the ingeniously positioned scales, even when viewed from above. Saves space: Perfectly portable; fits into Wiha cases. Saves time: Variable distance marks for up to 4 flush boxes. Increases your efficiency: Both bubbles can be seen easily even from an acute angle.

| 40 | cm |
|----|----|


| | | 240 |
|-----------|----------|-----|
| Order-No. | ™ | 8 |
| 42074 | 400 | 10 |









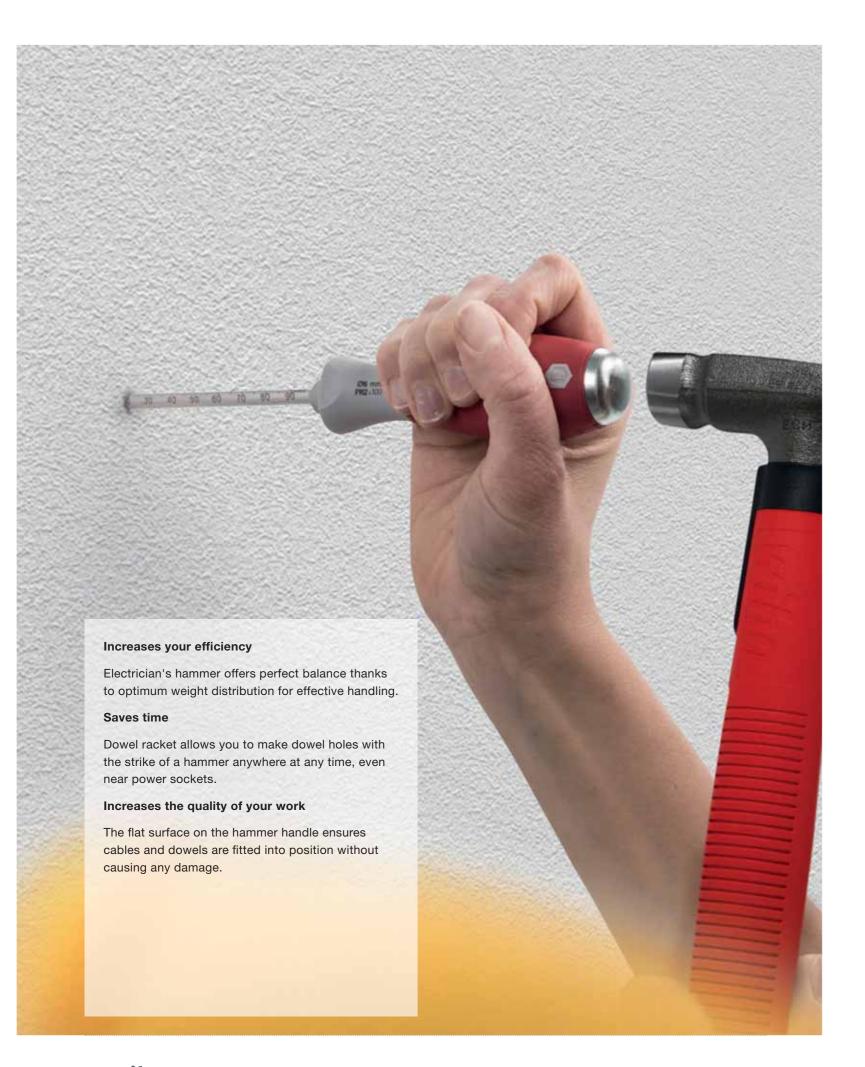



Striking


Optimum power transmission.

Specially tailored for use by electricians: Wiha impact tools. With optimally uniform weight distribution, the Wiha electric hammer strikes a perfect balance and is also eminently suitable for use in confined working environments. Its flat claws allow you to remove nails and nail clamps easily. The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage to the cable duct or plasterboard. Wiha's scaled impact screwdriver blade ensures that the portable dowel racket makes a perfectly dimensioned dowel hole to the required depth anywhere at any time and without making a mess, unlike power tools. The galvanic separation between the blade and solid steel cap ensures that the user is always protected, even if they accidentally hit a live wire.

"Fits nicely into the hand and can be used in a variety of ways. It's now a permanent fixture in my toolbox!" Andreas Ebener





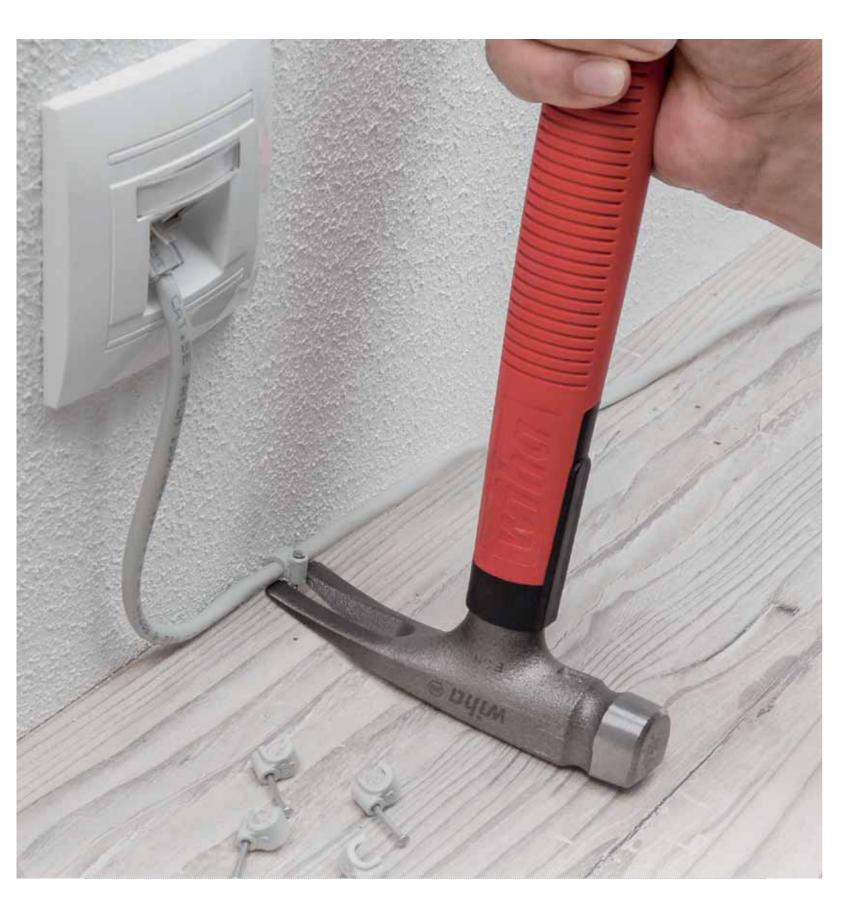



Thanks to its optimum balance, the electrician's hammer is perfectly sized in the hand while also providing a secure hold when hammering thanks to the ergonomically shaped hammer handle. With its U-shaped impact surface, the Wiha electrician's hammer delivers the optimum solution to working in corners and confined spaces. You can quickly and easily remove nails and nail clamps from walls with the flat claws on the hammer head. The flat surface on the hammer handle means cables and dowels are positioned effectively without causing any damage to the wall.

Simplifies your work

Flat claws allow you to remove nails and nail clamps easily.

• Increases your efficiency

Perfect balance thanks to optimum weight distribution for effective handling.

Improved access

Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape.

• Increases the quality of your work

The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.





| _ | | | |
|---|--|--|--|

SoftFinish® dowel racket set with dowels







Simplifies your work: Dirt- and dust-free work compared to when machines are used. Increases your safety: Galvanic separation in the handle prevents a discharge between the striking cap and the blade. Protects your health: Dowel hole can be made anywhere using a hammer at any time, even near power sockets. Saves time: Hammer dowel holes anywhere at any time without worrying how near you are to wall sockets. Increases your efficiency: Scaled impact screwdriver blade provides more detailed depth measurement. Perfectly dimensioned dowel hole thanks to blade adjusted to required size.

Phillips with 6 mm round blade in blister pack, 5-pcs.

| Order-No. | | |
|-----------|------------------|---|
| 41289 | | 1 |
| | 1 x Dowel racket | |
| | 2 x 30 mm Dowel | |
| | 2 x 40 mm Dübel | |











Simplifies your work: Flat claws allow you to remove nails and nail clamps easily. Increases your efficiency: Perfect balance thanks to optimum weight distribution for effective handling. Improved access: Perfectly suited for use in confined working environments thanks to the combination of a square and round head shape. Increases the quality of your work: The flat surface on the hammer handle ensures cables and dowels are fitted into position without causing any damage.

with 300 g hammer head, in blister pack

| • | 1 |
|---|---|
| | |

| Order-No. | | _ | 8 |
|-----------|------|-----|----------|
| 42071 | 23,9 | 283 | 4 |

INFOBOX:

SoftFinish® dowel racket set with dowels







- Ensures dirt- and dust-free work compared to machines.
- Galvanic separation between the blade and solid steel cap protects against electric shock.
- Perfect for portable use since you can make dowel holes anywhere at any time at the strike of a hammer.



INFOBOX: Electrician's hammer







- With its optimally uniform weight distribution, this hammer ensures perfect balance, delivering impact and fatigue-free work.
- Its flat claws make it easier to remove fastening components such as nail clamps, even from difficult-toaccess spots.
- Optimum access into corners and confined spaces thanks to U-shaped striking surface.
- The flat hammer handle lower surface acts as a softfaced hammer, ensuring components such as cables and dowels are fixed into position without causing damage.





Subject to technical changes.

All illustrations and graphics, specified dimensions and valuesand references to standards, e.g. DIN/EN, are non-binding. Any liability claims based on this will therefore be rejected.

No liability claims will be accepted for printing errors and mistakes which have occurred during the production of the catalogue.

All property rights to the catalogue held by Wiha Werkzeuge GmbH are reserved. The printing or copying of the texts and illustrations contained in this catalogue or its design is prohibited.

Our General Terms and Conditions (Terms of Sale, Deliveryand Payment) apply.

TORX®, TORX PLUS®= Registered Trademarks of ACUMENT GlobalTechnologies B.V.

ACR/AOT, Tri-Wing®, Torq-Set®= Registered
Trademarks of Phillips Screw Company

Pozidriv= Registered Trademark of European Industrial Services Ltd.

Protective measures

The following equipment is required for all work on or around live components and should be appropriate for the specific task

- insulating personal protective equipment
- insulating safety mechanisms
- insulated tools

Before starting work, you must disconnect all active, live components of electrical machines and equipment and ensure that they remain disconnected while you carry out the work.

This is achieved by complying with the five safety rules:

- disconnect
- secure against reconnection
- ensure power is switched off
- earth and short-circuit
- cover or block off adjacent live components





| chiselling | | |
|------------|--|--|

Wiha order number register

| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Page |
|-----------|------|-----------|------|-----------|------|-----------|----------|
| 00 | | 00858 | 67 | 03760 | 66 | 23147 | 79 |
| 00684 | 75 | 00859 | 67 | 03761 | 66 | 23149 | 79 |
| 00685 | 75 | 00860 | 67 | 03762 | 66 | 23151 | 79 |
| 00686 | 75 | 00861 | 67 | 03988 | 95 | 23195 | 78 |
| 00687 | 75 | 00862 | 67 | 04 | | 23197 | 79 |
| 00689 | 75 | 00863 | 67 | 04009 | 77 | 23199 | 79 |
| 00690 | 75 | 00864 | 67 | 04010 | 77 | 23201 | 79 |
| 00691 | 75 | 00865 | 67 | 04059 | 77 | 23203 | 79 |
| 00692 | 75 | 00866 | 67 | 04126 | 77 | 23205 | 79 |
| 00694 | 75 | 00867 | 67 | 04127 | 77 | 23207 | 79 |
| 00695 | 75 | 00868 | 67 | 04176 | 77 | 23209 | 79 |
| 00696 | 75 | 00877 | 66 | 04194 | 79 | 23211 | 79 |
| 00697 | 75 | 00878 | 66 | 04195 | 79 | 23213 | 77 |
| 00698 | 75 | 00879 | 66 | 04196 | 79 | 23215 | 77 |
| 00700 | 75 | 00880 | 66 | 04197 | 79 | 23217 | 77 |
| 00701 | 75 | 00881 | 66 | 04198 | 79 | 23219 | 77 |
| 00702 | 75 | 00882 | 66 | 05 | | 23221 | 77 |
| 00703 | 75 | 01 | | 05301 | 79 | 23223 | 77 |
| 00704 | 75 | 01418 | 94 | 05302 | 79 | 23225 | 77 |
| 00706 | 75 | 01790 | 77 | 05303 | 79 | 23226 | 77 |
| 00707 | 75 | 01791 | 77 | 05799 | 77 | 23227 | 77 |
| 00708 | 75 | 01792 | 77 | 05800 | 77 | 23228 | 77 |
| 00709 | 75 | 01793 | 77 | 06 | | 24 | |
| 00711 | 75 | 01794 | 77 | 06637 | 79 | 24867 | 79 |
| 00712 | 75 | 01795 | 77 | 06638 | 79 | 25 | |
| 00713 | 75 | 01796 | 77 | 06639 | 79 | 25477 | 65 |
| 00819 | 66 | 01798 | 77 | 06888 | 77 | 25553 | 79 |
| 00820 | 66 | 01799 | 77 | 06889 | 77 | 25739 | 79 |
| 00821 | 66 | 01800 | 77 | 20 | | 25740 | 79 |
| 00822 | 66 | 01803 | 77 | 20218 | 79 | 25741 | 79 |
| 00823 | 66 | 01805 | 77 | 20219 | 79 | 25742 | 79 |
| 00824 | 66 | 01808 | 77 | 20220 | 79 | 26 | |
| 00825 | 66 | 01809 | 77 | 20221 | 79 | 26000 | 78 |
| 00826 | 66 | 01811 | 77 | 20222 | 79 | 26002 | 78 |
| 00827 | 66 | 01812 | 77 | 20223 | 79 | 26625 | 37 |
| 00828 | 66 | 01913 | 76 | 20224 | 79 | 26626 | 37 |
| 00829 | 66 | 03 | | 21 | | 26627 | 37 |
| 00830 | 66 | 03223 | 74 | 21045 | 79 | 26705 | 103, 108 |
| 00831 | 66 | 03224 | 74 | 21047 | 79 | 26708 | 103, 108 |
| 00832 | 66 | 03225 | 74 | 22 | | 26711 | 103, 108 |
| 00833 | 65 | 03226 | 74 | 22509 | 77 | 26714 | 103, 109 |
| 00834 | 65 | 03228 | 74 | 22510 | 77 | 26717 | 103, 109 |
| 00846 | 66 | 03230 | 74 | 22511 | 77 | 26720 | 108 |
| 00847 | 66 | 03231 | 74 | 22512 | 77 | 26727 | 108 |
| 00848 | 66 | 03232 | 74 | 22596 | 79 | 26728 | 108 |
| 00849 | 66 | 03237 | 74 | 22597 | 79 | 26729 | 108 |
| 00850 | 66 | 03238 | 74 | 22598 | 79 | 26732 | 109 |
| 00853 | 67 | 03239 | 74 | 22599 | 79 | 26735 | 109 |
| 00855 | 67 | 03245 | 74 | 22600 | 79 | 26745 | 120 |
| 00856 | 67 | 03246 | 74 | 23 | | 26755 | 20 |
| 00857 | 67 | 03247 | 74 | 23145 | 79 | 26847 | 120 |



| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Pag |
|----------------|------|-----------|----------|-----------|------|-----------|-----|
| 26852 | 101 | 32306 | 78 | 33708 | 77 | 33969 | 19 |
| 6864 | 37 | 32307 | 78 | 33709 | 78 | 34 | |
| 6931 | 75 | 32308 | 78 | 33710 | 78 | 34306 | 76 |
| 7 | | 32309 | 78 | 33711 | 78 | 34452 | 78 |
| 7753 | 75 | 32310 | 89 | 33712 | 78 | 34453 | 78 |
| 7754 | 75 | 32383 | 75 | 33713 | 78 | 34454 | 78 |
| 7755 | 75 | 32384 | 75 | 33714 | 78 | 34455 | 78 |
| 7928 | 69 | 32396 | 66 | 33715 | 78 | 34456 | 78 |
| 7929 | 69 | 32397 | 66 | 33716 | 78 | 34457 | 78 |
| 7930 | 69 | 32399 | 75 | 33717 | 78 | 34554 | 79 |
| 7931 | 69 | 32400 | 75 | 33718 | 78 | 34555 | 79 |
| 7932 | 69 | 32409 | 78 | 33719 | 78 | 34556 | 79 |
| 7933 | 69 | 32410 | 78 | 33720 | 78 | 34557 | 79 |
| 934 | 69 | 32411 | 78 | 33721 | 78 | 34558 | 79 |
| 935 | 69 | 32412 | 78 | 33722 | 78 | 34559 | 79 |
| | | 32413 | 78 | 33723 | 78 | | |
| 3 | 70 | 32413 | 78 | 33724 | 78 | 34560 | 79 |
| 3481 | 78 | 32414 | 78 | 33725 | 78 | 34578 | 43, |
| 3691 | 47 | | | | | 34579 | 43, |
| 9 | | 32416 | 78 | 33726 | 78 | 34580 | 43 |
| 9416 | 88 | 32417 | 78 | 33727 | 78 | 34581 | 43 |
|)417 | 88 | 32418 | 78 | 33728 | 78 | 34582 | 43 |
| 466 | 67 | 32419 | 78 | 33729 | 78 | 34583 | 43 |
|) | | 32421 | 78 | 33730 | 78 | 34584 | 43 |
| 361 | 66 | 32423 | 78 | 33731 | 78 | 34585 | 43 |
| 362 | 66 | 32477 | 76 | 33732 | 78 | 34586 | 43 |
| 363 | 66 | 32486 | 78 | 33736 | 80 | 34587 | 43 |
| 364 | 66 | 32490 | 77 | 33743 | 80 | 34588 | 43 |
| 365 | 66 | 32491 | 77 | 33764 | 80 | 34589 | 43 |
| 366 | 66 | 32492 | 77 | 33841 | 123 | 34590 | 43 |
| 700 | 66 | 32493 | 77 | 33842 | 124 | 34688 | 11 |
| 701 | 66 | 32494 | 78 | 33843 | 123 | 34689 | 11 |
| 715 | 66 | 32495 | 78 | 33844 | 123 | 34690 | 11 |
| 716 | 66 | 32496 | 78 | 33920 | 78 | 34691 | 11: |
| l | | 32497 | 78 | 33921 | 78 | 34692 | 11: |
| 1863 | 66 | 32686 | 77 | 33922 | 78 | 34693 | 118 |
| 957 | 77 | 32687 | 77 | 33923 | 78 | 34694 | 11 |
| 958 | 77 | 32688 | 78 | 33924 | 78 | 34695 | 115 |
| 959 | 77 | 32689 | 78 | 33925 | 78 | 34696 | 115 |
| 960 | 77 | 33 | | 33926 | 78 | 34697 | 118 |
| 1961 | 77 | 33259 | 110, 121 | 33927 | 78 | 34698 | 11: |
| 962 | 77 | 33261 | 110 | 33928 | 78 | 34699 | 118 |
| 973 | 78 | 33520 | 109 | 33929 | 78 | 34700 | 11: |
| 975 | 79 | 33699 | 79 | 33930 | 78 | 34701 | 11: |
| 977 | 79 | 33700 | 79 | 33931 | 78 | 34702 | 11 |
| | 13 | 33701 | 79 | 33932 | 78 | 34703 | 118 |
| 2 | 77 | 33702 | 79 | 33961 | 77 | 34704 | 11: |
| 2105 | 77 | 33703 | 77 | 33962 | 77 | 34705 | 118 |
| 2299 | 78 | 33704 | 77 | 33963 | 77 | 34706 | 115 |
| 2302 | 78 | 33705 | 77 | 33964 | 77 | 34707 | 11: |
| | 78 | | | | | | |
| 32303 32304 | 78 | 33706 | 77 | 33965 | 77 | 34708 | 11 |





| Order-No. | Page | Order-No. | Page | Order-No. | Page | Order-No. | Pa |
|--------------|--------|-----------|--------|-----------|--------|-----------|----|
| 34744 | 103 | 36558 | 63 | 39124 | 89 | 41233 | 5 |
| 34745 | 132 | 36791 | 34 | 39134 | 76 | 41234 | Ę |
| 5 | | 37 | | 39178 | 79 | 41246 | |
| 5389 | 63 | 37067 | 132 | 39179 | 79 | 41274 | |
| 5390 | 64 | 37137 | 18 | 39180 | 79 | 41279 | - |
| 5391 | 64 | 37147 | 43, 58 | 39181 | 79 | 41286 | 1 |
| 5392 | 64 | 37222 | 43, 58 | 39182 | 79 | 41289 | 1 |
| 5393 | 64 | 37223 | 43, 58 | 39183 | 79 | 41341 | 4 |
| 35394 | 64 | 37224 | 43, 58 | 39184 | 78 | 41342 | 4 |
| 35395 | 64 | 37225 | 43, 58 | 39185 | 78 | 41343 | 4 |
| 35396 | 64 | 37226 | 43, 58 | 39186 | 78 | 41344 | |
| 5446 | 64 | 37227 | 43, 58 | 39187 | 78 | 41345 | 4 |
| 5456 | 77 | 37351 | 93 | 39188 | 79 | 41476 | 4 |
| 5457 | 77 | 37402 | 104 | 39189 | 79 | 41477 | |
| 5501 | 64 | 37402 | 104 | 39190 | 79 | 41478 | |
| 5502 | 64 | 37450 | 108 | 39191 | 79 | 41479 | 4 |
| 5503 | 64 | 37450 | 132 | 39192 | 79 | 41824 | 8 |
| 5503 5504 | 64 | 38 | 102 | 39193 | 79 | 41825 | 8 |
| | | | 0.1 | 39194 | 79 | 41826 | 8 |
| 5505 | 64 | 38020 | 21 | 39195 | 78 | 41827 | 8 |
| 5506 5507 | 43, 58 | 38074 | 36 | 39195 | 78 | 41828 | 8 |
| 5507 5508 | 43, 58 | 38191 | 100 | 39196 | 78 | 41829 | 8 |
| 5508 | 43, 58 | 38362 | 63 | 39198 | 78 | 41830 | 8 |
| 5509 | 43, 58 | 38370 | 78 | 39199 | 78 | 41831 | 8 |
| 5510 | 43, 58 | 38371 | 78 | 39200 | 79 | 41832 | 8 |
| 5511 | 43, 58 | 38372 | 78 | | 79 | | |
| 5861 | 124 | 38552 | 120 | 39201 | | 41833 | 8 |
| 5862 | 124 | 38601 | 80 | 39202 | 79 | 41834 | 8 |
| 5870 | 44 | 38610 | 50 | 39203 | 79 | 41911 | 3 |
| 5969 | 121 | 38798 | 121 | 39204 | 79 | 41912 | 3 |
| 86 | | 38918 | 46 | 39206 | 79 | 41913 | 3 |
| 6050 | 122 | 38919 | 46 | 39207 | 79 | 41914 | 3 |
| 6051 | 121 | 38920 | 46 | 39208 | 79 | 41915 | 3 |
| 6052 | 121 | 38921 | 46 | 40 | | 41923 | 1 |
| 6053 | 121 | 38925 | 47 | 40282 | 22 | 41979 | 9 |
| 6071 | 43, 58 | 38926 | 47 | 40523 | 17 | 42 | |
| 6092 | 76 | 38927 | 47 | 40674 | 35 | 42062 | 1: |
| 6093 | 76 | 38928 | 47 | 40921 | 102 | 42068 | 1: |
| 6094 | 76 | 38929 | 47 | 40923 | 110 | 42069 | 1 |
| 6114 | 74 | 38930 | 47 | 40948 | 21 | 42071 | 1 |
| 6189 | 104 | 38931 | 46 | 41 | | 42074 | 1 |
| 6327 | 78 | 38932 | 46 | 41003 | 62 | 42086 | 3 |
| 6329 | 64 | 38933 | 46 | 41141 | 64 | 42098 | 8 |
| 6330 | 64 | 38934 | 46 | 41142 | 64 | 42099 | 8 |
| 6389 | 20 | 38935 | 46 | 41143 | 64 | 42114 | 8 |
| 6453 | 94 | 38936 | 46 | 41144 | 64 | 42115 | 8 |
| 6455 | 63 | 39 | | 41145 | 64 | 42116 | 8 |
| 6487 | 94 | 39029 | 88 | 41146 | 64 | 42117 | 8 |
| 6536 | 64 | 39037 | 89 | 41147 | 64 | 42118 | 8 |
| 6537 | 64 | 39039 | 89 | 41159 | 43, 58 | 42135 | 8 |
| 6538 | 64 | 39040 | 88 | 41160 | 43, 58 | 42136 | 8 |
| 36539 | 64 | 39041 | 88 | 41223 | 22 | 42137 | 8 |
| 36540 | 64 | 39041 | 89 | 41230 | 54 | 42138 | 8 |
| 36541 | 64 | 39045 | 74 | 41231 | 51 | 42139 | 8 |
| 36542 | 64 | | | 41232 | 52 | 42162 | 1 |
| JUJ-12 | 07 | 39078 | 88 | 71202 | UL. | .2102 | |




| Order-No. | Page | Order-No. | Page |
|----------------|--------------|----------------|------------------|
| 42374 | 68 | 43078 | 45, 70 |
| 42375 | 68 | 43079 | 45, 70 |
| 42376 | 68 | 43080 | 45, 70 |
| 42377 | 68 | 43081 | 45, 70 |
| 42378 | 68 | 43082 | 45, 70 |
| 42379 | 68 | 43083 | 45, 70 |
| 42380 | 68 | 43084 | 45, 70 |
| 42471 | 68 | 43085 | 45, 70 |
| 42989 | 68 | 43086 | 45, 70 |
| 43 | | 43087 | 45, 70 |
| 43022 | 24 | 43088 | 45, 71 |
| 43023 | 23 | 43089 | 45, 71 |
| 43024 | 23 | 43090 | 45, 71 |
| 43026 | 70 | 43091 | 45, 71 |
| 43027 | 70 | 43092 | 45, 71 |
| 43028 | 70 | 43093 | 45, 71 |
| 43029 | 70 | 43094 | 45, 71 |
| 43030 | 70 | 43095 | 45, 71 |
| 43031 | 70 | 43096 | 45, 71 |
| 43032 | 70 | 43097 | 45, 71 |
| 43033 | 70 | 43098 | 45, 71 |
| 43034 | 70 | 43099 | 45, 71 |
| 43035 | 70 | 43100 | 72 |
| 43036 | 70 | 43101 | 72 |
| 43037 | 70 | 43102 | 72 |
| 43038 | 70 | 43103 | 72 |
| 43039 | 70 | 43104 | 72 |
| 43040 | 70 | 43105 | 72 |
| 43041 | 70 | 43106 | 72 |
| 43042 | 70 | 43107 | 72 |
| 43043 | 70 | 43108 | 72 |
| 43044 | 70 | 43109 | 72 |
| 43052 | 73 | 43110 | 72 |
| 43053 | 73 | 43111 | 72 |
| 43055 | 73 | 43112 | 72 |
| 43056 | 73 | 43113 | 72 |
| 43057 | 73 | 43114 | 43, 58 |
| 43058 | 73 | 43115 | 43, 58 |
| 43061 | 70 | 43116 | 43, 58 |
| 43062 | 73 | 43117 | 43, 58 |
| 43063 | 73 | 43125 | 104 |
| 43065 | 71 | 43128 | 44 |
| 43066 | 71 | 43139 | 59 |
| 43067 | 71 | 43140 | 43, 58 |
| 43068 | 71 | 43141 | 43, 58 |
| 43069 | 71 | 43142 | 43, 58 |
| 43070 | 71 | 43143 | 43, 58 |
| 43071 | 71 | 43144 | 43, 58 |
| 43072 | 71 | 43145 | 43, 58 |
| 43073 | 71 | 43146 | 43, 58 |
| 43074 | 71 | 43147 43148 | 43, 58 |
| 43075 | 71 | 43148 | 43, 58 |
| 43076 43077 | 71 45, 70 | 43149 | 43, 58 43, 58 |
| 43011 | -10, 10 | 10100 | 10, 00 |


| Order-No. | Page |
|-----------|--------|
| 43151 | 43, 58 |
| 43152 | 42,57 |
| 43153 | 42,57 |
| 43154 | 42,57 |
| 43155 | 42,57 |
| 43156 | 42,57 |
| 43157 | 42,57 |
| 43158 | 42,57 |
| 43159 | 42,57 |
| 43160 | 42,57 |
| 43161 | 41, 56 |
| 43162 | 41, 56 |
| 43167 | 55 |
| 43177 | 46 |
| 43292 | 59 |
| 43326 | 102 |
| 43335 | 102 |
| 43340 | 102 |
| 43449 | 54 |
| 43465 | 19 |
| 43466 | 36 |
| 43467 | 53 |
| | |



Overview of torque tools

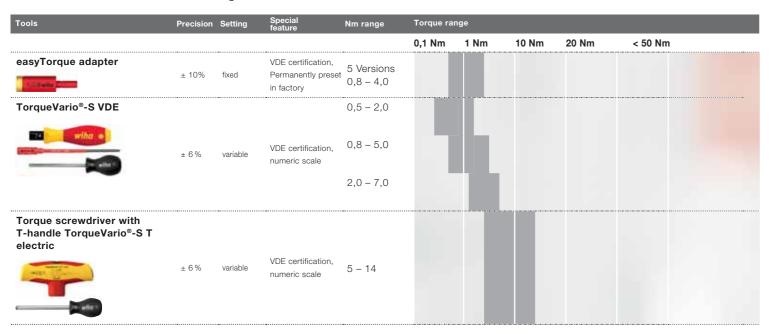

The cutting capacities for our pliers.

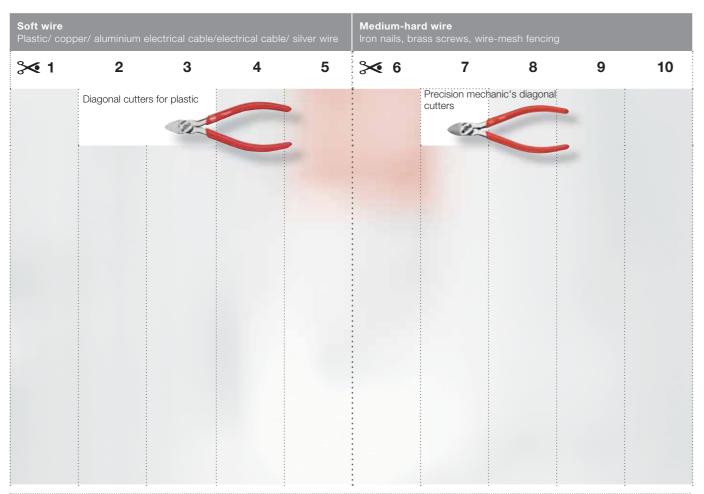





| Hard wire Screws, wire re | ope, wire bas | sket, electric ra | | Hardened spring steel Springs, hardened pins, chains | | | | | | |
|------------------------------|---------------|--------------------|--------|--|--------------------|----------------|-------------------------------|-----------------------|------------|-------------|
| ≫ 11 | 12 | 13 | 14 | 15 | ≫ 16 | 17 | 18 | 19 | 20 | ≫ 21 |
| | Т | riCut installation | pliers | | | | | iCut® Diagona 00%/ | ll cutters | 200 % |
| | | ilectrician's diag | onal | | | H | High-leverage combination pli | ers | | |
| nomic® combina | ation pliers | | | Combination | n pliers | | > | | | |
| Inomic® needle r | nose pliers | | | Diagonal cu | tters | | > | | | |
| | | | | | | Heavy-duty dia | agonal cutters | | | |
| | | | | | Needle nose pliers | -0 | | | | |
| | | | | | Bent needle no | se pliers | | | | : |



Legend

| Driv | es | Scre | wdrivers [mm] | Plier | s [mm] | Meas | surement tools [mm] |
|---|--|---|-----------------------------|------------|---------------------------------|---|--------------------------|
| ٥ | Triangular nut | T | Cut width | | Flat jaws | ‡[| Width of segments |
| 0 | Hex | ⊖; | Tip width | • | Half round jaws | ∢œ | Colour |
| 0 | Square nut | •1 | Round blade dimension | : | Round jaws | L. | Measurement capacity [mm |
| • | Hexagon socket | •1 | Hex blade | [| Cutter without bevel | <u>L</u> | Measurement capacity in |
| 0 | Internal hexagon with drill | ○ ‡ | Hex bolster | K | Cutter with small bevel | | Inch |
| | hole (tamper-resistant) | ‡ | Scraper width | X | Cutter with bevel | | |
| 0 | Tamper Resistant hex | := | Clip opening | Į | Anvil cutter | | Battery |
| • | Countersink | 1== | Tip width | 1 | Center cutter | LED | LED lumens |
| 0 | Combination drill bit | - | Head width, nut driver | 1 | Scissors cutter | * | Laser light |
| • | Pentalobe PL | ≕ | Blade length | | Front cutting edge in | | |
| & | Y-Type | ‡ | Shaft lengths | | stripping pliers | Soft | faced hammer [mm] |
| 0 | Phillips PH (cross-recessed) | = | Handle length | Ømm | Max. diameter | • | Face diameter |
| ₩ | Pozidriv PZ (Phillips) | + | Handle diameter | mm² | Max. cross-section | | Hammer face width |
| • | Robertson | .1. | Torque T-handle length | 0; | Max. gripper pipe diameter | + | Hammer head width |
| | Round tip | - 01 | Torque T-handle width | 0; | Max. gripper width across flats | *************************************** | |
| 1 | Slotted | max. Nm | Max. torque value [Nm] | Ů | External retaining ring | Gene | eral symbols |
| Φ | Slotted nut | max. in.lbs. | Max. torque value [in.lbs] | <u> </u> | Internal retaining ring | - d | Weight, g |
| • | SIT | ₩ % | Accuracy [%] | 3 | Clamping range | • | Diameter |
| • | Spanner | | Cable key depth | | Opening width flat | SB | Blister packed |
| • | Twist drill | | | ≥ . | Cutting force | mm | Total length |
| ① | Sliding sleeve | | | w | with opening spring | ← | Gesamtlänge Inch |
| D | Torq-Set® | | | AWG | American Wire Gauge | * | Packaging unit |
| • | TORX® | I -ke | ys [mm] | 71110 | Saw blade length | | |
| | TORX® with drill hole (tamper-resistant) | • | Round blade dimension | ← → | - Caw blade longth | | |
| • | TORX PLUS® | •1 | Hex blade | | | | |
| 3 | Tri-Wing® | ○ ‡ | Hex bolster | | | | |
| * | Multitooth | ‡ | Shaft lengths | | | | |
| | Square reaming blade | ₩ | Blade length | | | | |
| * | Xeno SL/PZ | • | Side driver length T-handle | | | | |
| *************************************** | | — 01 | Handle width | | | | |
| | | →). | Diameter | | | | |
| Driv | es | *************************************** | - | | | | |
| 0 | Square nut | Bits | [mm] | | | | |
| | Square | | Threaded connector | | | | |
| • | G7 drive system | ₩ | Drill working length | | | | |
| 0 | Threaded connector | | Screw size | | | | |
| (3) | | | | | | | |
| | SDS-Plus® | | | | | | |



Legend

Ball end can swivel

slimTECHNOLOGY

up to 25°

Ranges Torque Impact tools Cutting-to-length Optimum weight Precision: ±6% Case strength diameter distribution Skinning diameter Accuracy ±10% Wheel-along case Soft hammer end length SLIM Levers out nail slimTECHNOLOGY Automatic skinning Case shape clamp Case suitable for DynamicJoint® transport by air L-keys Measurement tool Heavy-duty diagonal MagicRing® Fully encased cutters OptiGrip MagicSpring® Visible from just 10° Elektro Ball end can swivel Torque safety check MagicTips® Visible in UV light Nm up to 25° TORX® ball end; can BiCut® Power Saves time swivel up to 25° TriCut® Visible in UV light Screwdrivers **General information** Recommended MagicRing® for electricians - non-insulated Bits Suitable for impact VDE-tested and MagicSpring® certified screwdrivers

Lifespan 120 times

Visible in UV light

longer



CE marking

ESD electronics





X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Wire Stripping & Cutting Tools category:

Click to view products by Wiha manufacturer:

Other Similar products are found below:

```
6-690504-4 693855-1 813066-2 844764-5 844765-5 1-240642-7 133900-001 1-356885-4 1424635-1 1424649-1 1424650-1 1440-0013-84

1-458031-5 1-458030-5 MT10-250Q 1755 2-539783-7 L-5211 1633578-3 F10-10Q 1-844765-9 251465-1 R282066100 313808-1

CST596711 458031-9 462839-1 467281-1 4-690504-2 406339-3 L-4994 45-265 453653-1 45-418 455177-1 455671-4 458144-8 462007-1 462548-1 464661-1 224186-1 679746-1 809687-1 852080-2 856695-8 11-40-4082 458030-1 679326-7 605744-1 690784-2
```