

## 1.5 Amps Surface Mount Bridge




## DB151S-DB157S

## Features:

- Glass passivated chip junction
- Ideal for surface mounted applications
- High forward surge current capability
- High temperature soldering guaranteed:  
260°C/10 seconds at terminals
- Low leakage

DB-S

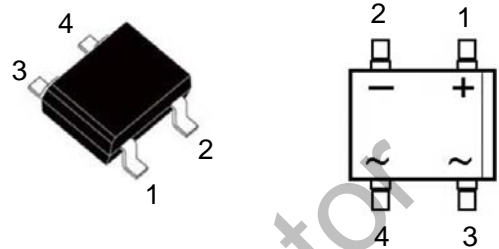

## Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	DB 151S	DB 152S	DB 153S	DB 154S	DB 155S	DB 156S	DB 157S	Unit
Maximum Reverse Peak Repetitive Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current, 0.06"(1.5mm) lead length at Ta=40°C (Note 1)	$I_{(AV)}$	1.5							A
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50							A
Total Device Dissipation Derate above 25°C	$P_D$	10.4							W
Maximum Reverse Current @ rated $V_R$	$I_R$	10 1.0							$\mu A$ mA
Maximum Forward Voltage @ 1.5 A	$V_F$	1.1							V
Typical Thermal Resistance (NOTE 1)	$R_{\theta JA}$	40							°C/W
Typical Junction Capacitance @ $V_R = 4.0$ V, $f = 1.0$ MHz	$C_j$	25							pF
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 to +150							°C

Note :1.Unit mounted on P.C.B. with 0.51"x0.51" ( 13x13mm) copper pads.

Typical Characteristics

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

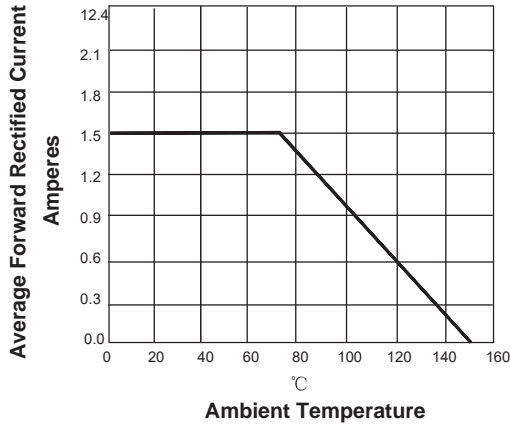


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

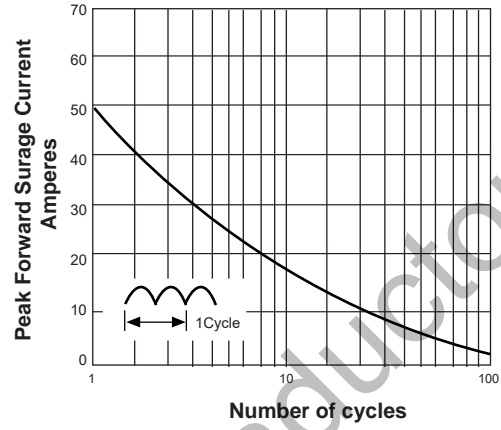


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

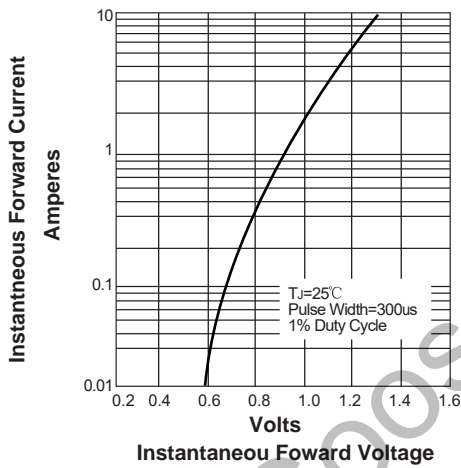


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS



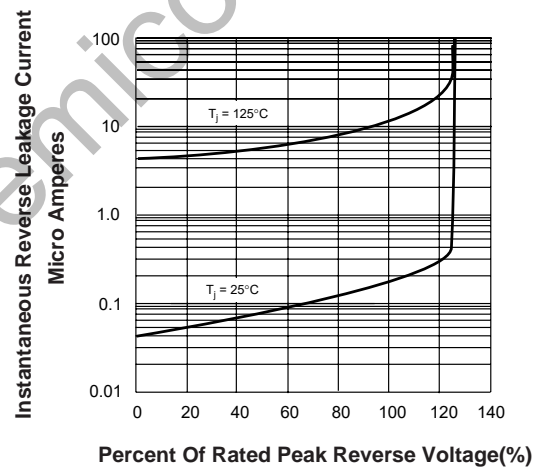


FIG. 5-TYPICAL JUNCTION CAPACITANCE

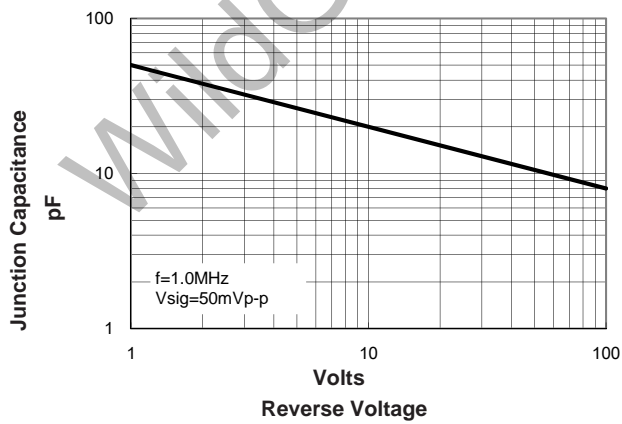

**Package Dimension**

DB-S

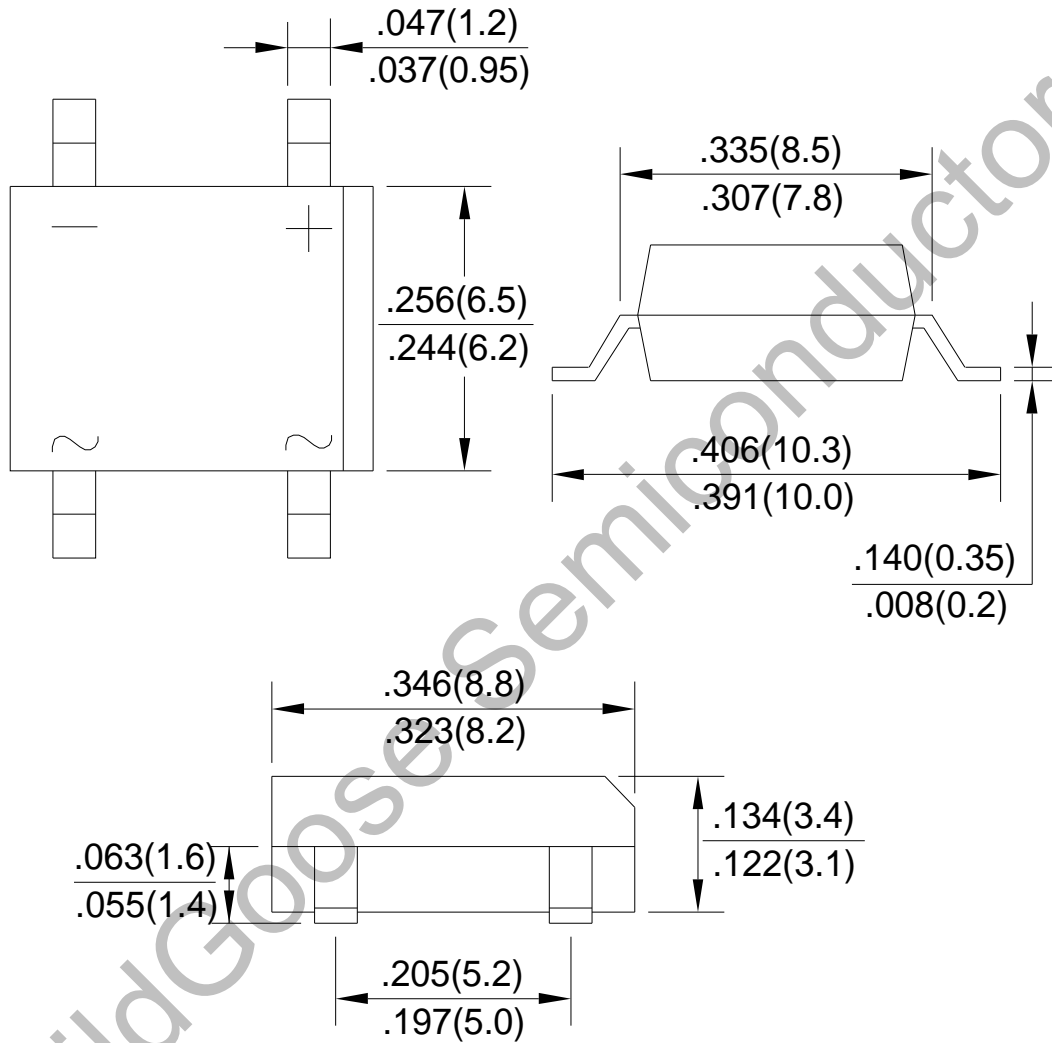

Dimensions in inches and (millimeters)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [Wild Goose](#) manufacturer:*

Other Similar products are found below :

[MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBJ1502-BP](#) [GBU6M](#) [TB102M](#) [MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [KBPC25-02](#) [VBO160-12NO7](#) [VS-110MT120KPBF](#) [VS-60MT80KPBF](#) [DB105-BP](#) [DF1510S](#) [VS-40MT160PAPBF](#) [GBU4G-BP](#) [GSIB15A80-E3/45](#) [DB104-BP](#) [D3SB60](#) [TB354](#) [GBJ2504-BP](#) [26MB100A](#) [B1S-G](#) [VS-40MT160KPBF](#) [VUO162-16NO7](#) [ABS10-G](#) [GBU6B-BP](#) [GBJ1508-BP](#) [BR5010-G](#) [ABS6-G](#) [B125C800G-E4/51](#) [MSB15MH-13](#) [LBS10-13](#)