

Asymmetrical TVS Diode Array

General description

The SM712 TVS Diode Array is designed to protect RS-485 applications with asymmetrical working voltages (-7V to 12V) from damage due to electrostatic discharge (ESD), electrical fast transients (EFT), and lightning induced surges. The SM712 can absorb repetitive ESD strikes above the maximum level specified in the IEC 61000-4-2 international standard without performance degradation and safely dissipate up to 15A of 8/20 μ s induced surge current (IEC- 61000-4-5 2nd edition) with very low clamping voltages.

Features and benefits

- . Transient Protection to
IEC 61000-4-2 (ESD): $\pm 15\text{kV}$ (Air), $\pm 8\text{kV}$ (Contact)
IEC 61000-4-5 (Lightning): 10A for 12V TVS
& 15A for 7V TVS ($t_p = 8/20\mu\text{s}$)
- . Peak pulse power ($t_p = 8/20\mu\text{s}$): 500-700W
- . Protects two +12V to -7V lines
- . Low capacitance
- . Low clamping voltage
- . Solid-State Silicon-Avalanche Technology
- . RoHS compliant and lead-free


Application information

- . RS-485 transceivers with extended common mode range
- . Security systems
- . Automatic Teller Machines
- . Lighting Control - DALI
- . Communication Equipments
- . HFC systems
- . Networks

Ordering information

Device	Package	Marking	Packaging
SM712	SOT23	712	3000/Tape & Reel

Schematic & Pin configuration

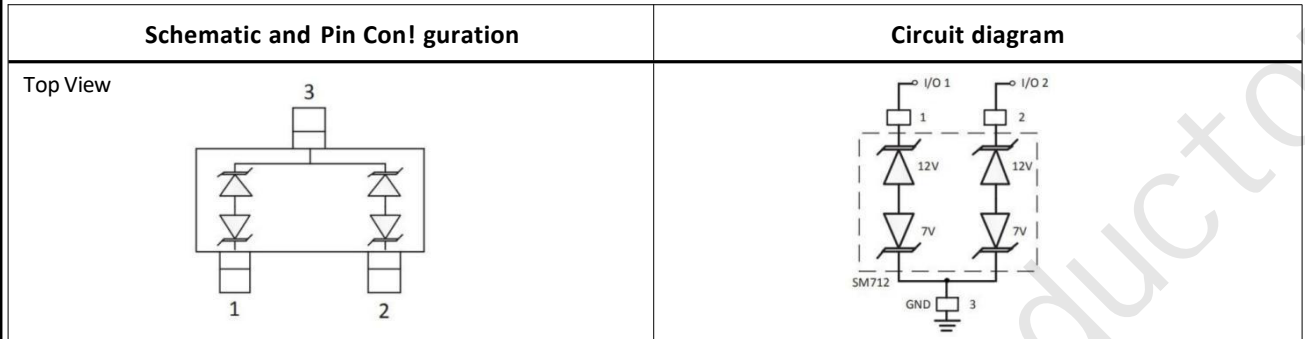


Maximum Ratings (T_{OP} = 25 °C, unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (t _p = 8/20μs), (V _{RWM} =7V/V _{RWM} =12V)	P _{PPM}	300/300	W
Peak Pulse Current (t _p = 8/20μs), (V _{RWM} =7V/V _{RWM} =12V)	I _{PPM}	15/10	A
ESD voltage IEC 61000-4-2 (air discharge)	V _{ESD}	15	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V _{ESD}	8	kV
Maximum lead temperature for soldering during 10s	T _L	260	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C
Operating Temperature Range	T _{OP}	-40 to +125	°C


Electrical Characteristics (T_{OP} = 25 °C, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V _{RWM}	--	--	7.0	V	Pin3 to Pin1 or 2
		--	--	12.0		Pin1 or 2 to Pin3
Breakdown Voltage	V _{BR}	7.5	--	--	V	I _f =1mA, Pin3 to Pin1 or 2
		13.3	--	--		I _f =1mA, Pin1 or 2 to Pin3
Leakage Current I _{Leak}	I _R	--	--	1.0	μA	V _{RWM} =7V, Pin3 to Pin1 or 2
		--	--	1.0		V _{RWM} =12V, Pin1 or 2 to Pin3
Clamping Voltage	V _C	--	--	20.0	V	I _{PP} =15A, T _p =8/20μs, Pin3 to Pin1 or 2
		--	--	30.0		I _{PP} =10A, T _p =8/20μs, Pin1 or 2 to Pin3
Junction Capacitance	C _J	--	--	20.0	pF	V _R =0V, f=1MHz, Pin1 or 2 to Pin3

Typical Characteristics

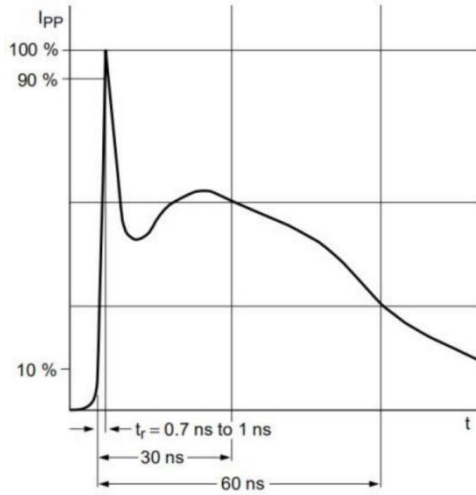


IEC61000-4-2 Waveform

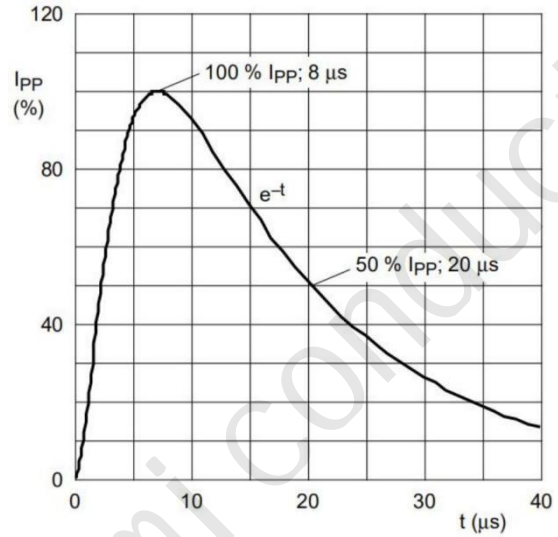

IEC 61000-4-5 Waveform(8/20μs pulse)

Package Outline Dimensions

SOT23

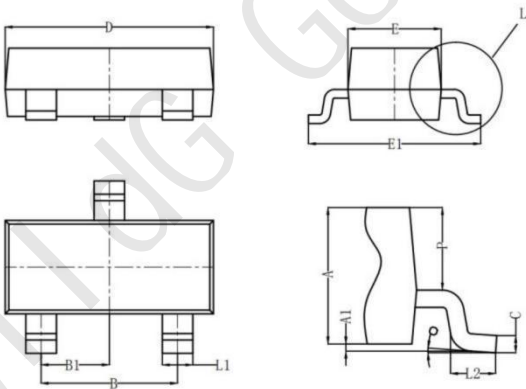

Symbol	Dimensions (mm)		
	Min	Typ	Max
A	0.900	1.000	1.1100
A1	0.000	0.050	0.100
L1	0.350	0.400	0.500
C	0.100	0.110	0.120
D	2.800	2.900	3.000
E	1.250	1.300	1.350
E1	2.250	2.400	2.550
B	1.800	1.900	2.000
B1	0.950 Typ		
L2	0.200	0.350	0.450
P	0.550	0.575	0.600

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Wild Goose](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)