





WGC3320

## Features:

- High Current Capability:  $I_C=15A$
- High voltage, high speed switching
- High reliability
- 100% Avalanche Tested

TO-3P



1. Base (B)
2. Collector (C)
3. Emitter (E)

### ■ ABSOLUTE MAXIMUM RATINGS ( $T_C = 25$ )

PARAMETER	SYMBOL	RATINGS	UNIT
Collector Base Voltage	$V_{CBO}$	700	V
Collector Emitter Voltage	$V_{CEO}$	400	V
	$V_{CEO(SUS)}$	400	V
Emitter Base Voltage	$V_{EBO}$	7	V
Collector Current	$I_C$	15	A
Base Current	$I_B$	5	A
Power Dissipation	$P_D$	80	W
Junction Temperature	$T_J$	+150	
Storage Temperature	$T_{STG}$	-40 ~ +150	

Note 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The device is guaranteed to meet performance specification within 0 ~ +70 operating temperature range and assured by design from -20 ~ +85

### ■ ELECTRICAL SPECIFICATIONS ( $T_C=25$ , Unless Otherwise Specified.)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Base Voltage	$V_{CBO}$	$I_{CBO}=1mA$	700			V
Collector Emitter Voltage	$V_{CEO}$	$I_{CEO}=10mA$	400			V
	$V_{CEO(SUS)}$	$I_C=0.2A$	400			V
Emitter Base Voltage	$V_{EBO}$	$I_{EBO}=1mA$	7			V
Collector Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=6A, I_B=1.2A$			1	V
Base Emitter Saturation Voltage	$V_{BE(SAT)}$				1.5	V
Collector Cut-off Current	$I_{CBO}$	$V_{CBO}=500V$			1	mA
Emitter Cut-off Current	$I_{EBO}$	$V_{EBO}=7V$			1	mA
DC Current Gain	$h_{FE}$	$I_C=6A, V_{CE}=5V$	10			
Switching Time	$t_{ON}$	$I_C=7.5A, I_{B1}=1.5A, I_{B2}=-3A$ $R_L=20\Omega, P_w=20\mu s, Duty \leq 2\%$			0.5	$\mu s$
	$t_{STG}$				1.5	$\mu s$
	$t_F$				0.15	$\mu s$

### ■ THERMAL CHARACTERISTICS


PARAMETER	SYMBOL	RATINGS	UNIT
Thermal Resistance Junction to Case	$J_C$	1.55	/W

■ TYPICAL CHARACTERISTICS


Collector Output Characteristics

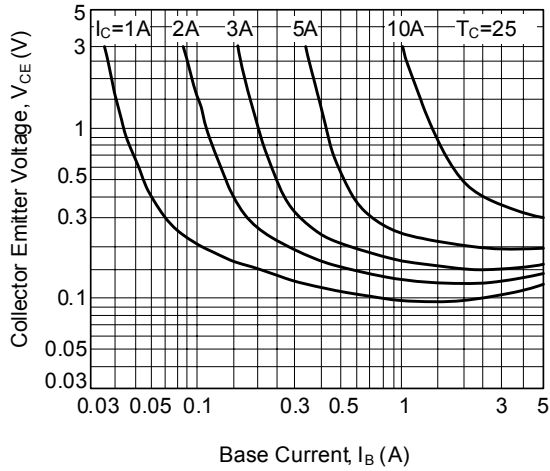


DC Current Gain

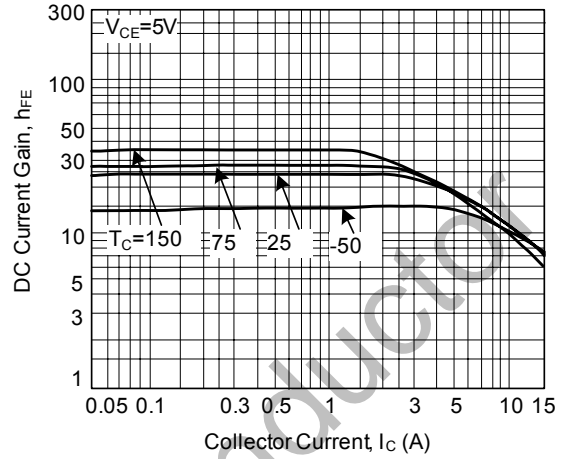


Base and Collector Saturation Voltage

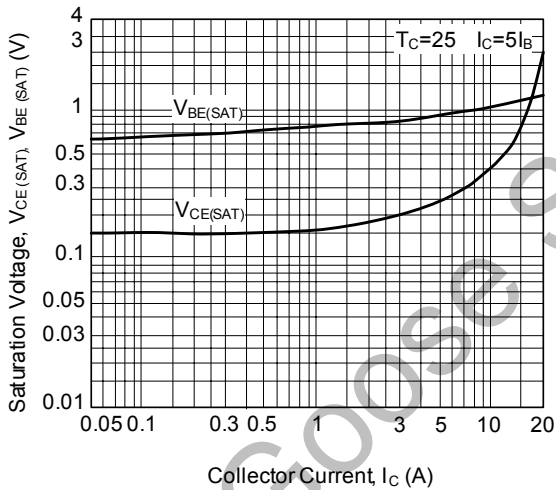


Safe Operating Area

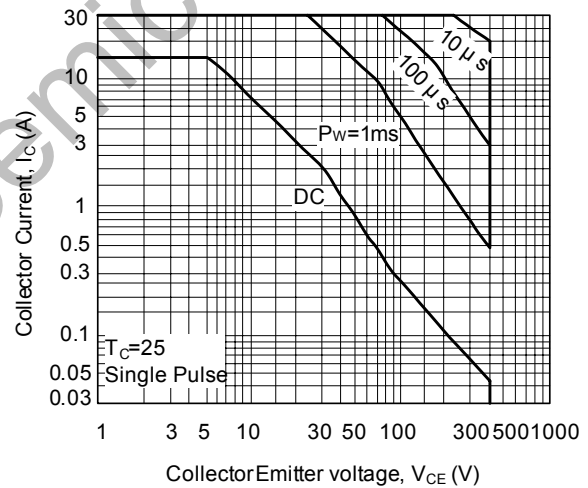

Switching Time

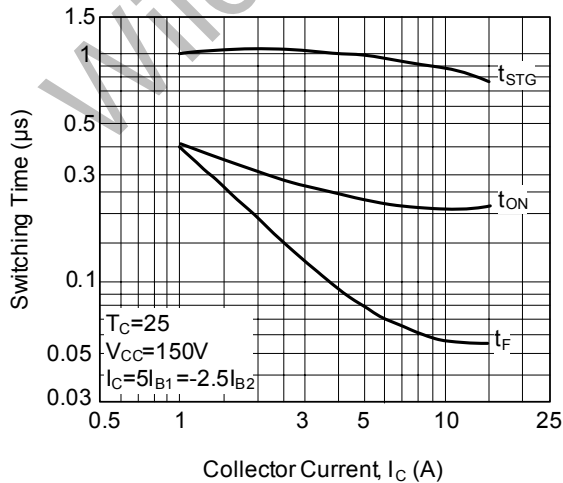


## ■ SWITCHING TIME TEST CIRCUIT

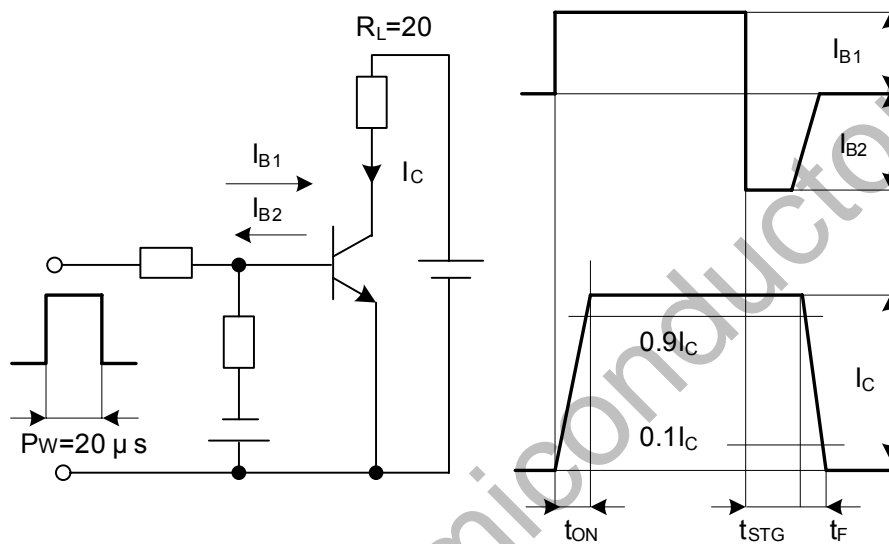

**Package Dimension**

TO-3P

Unit: mm

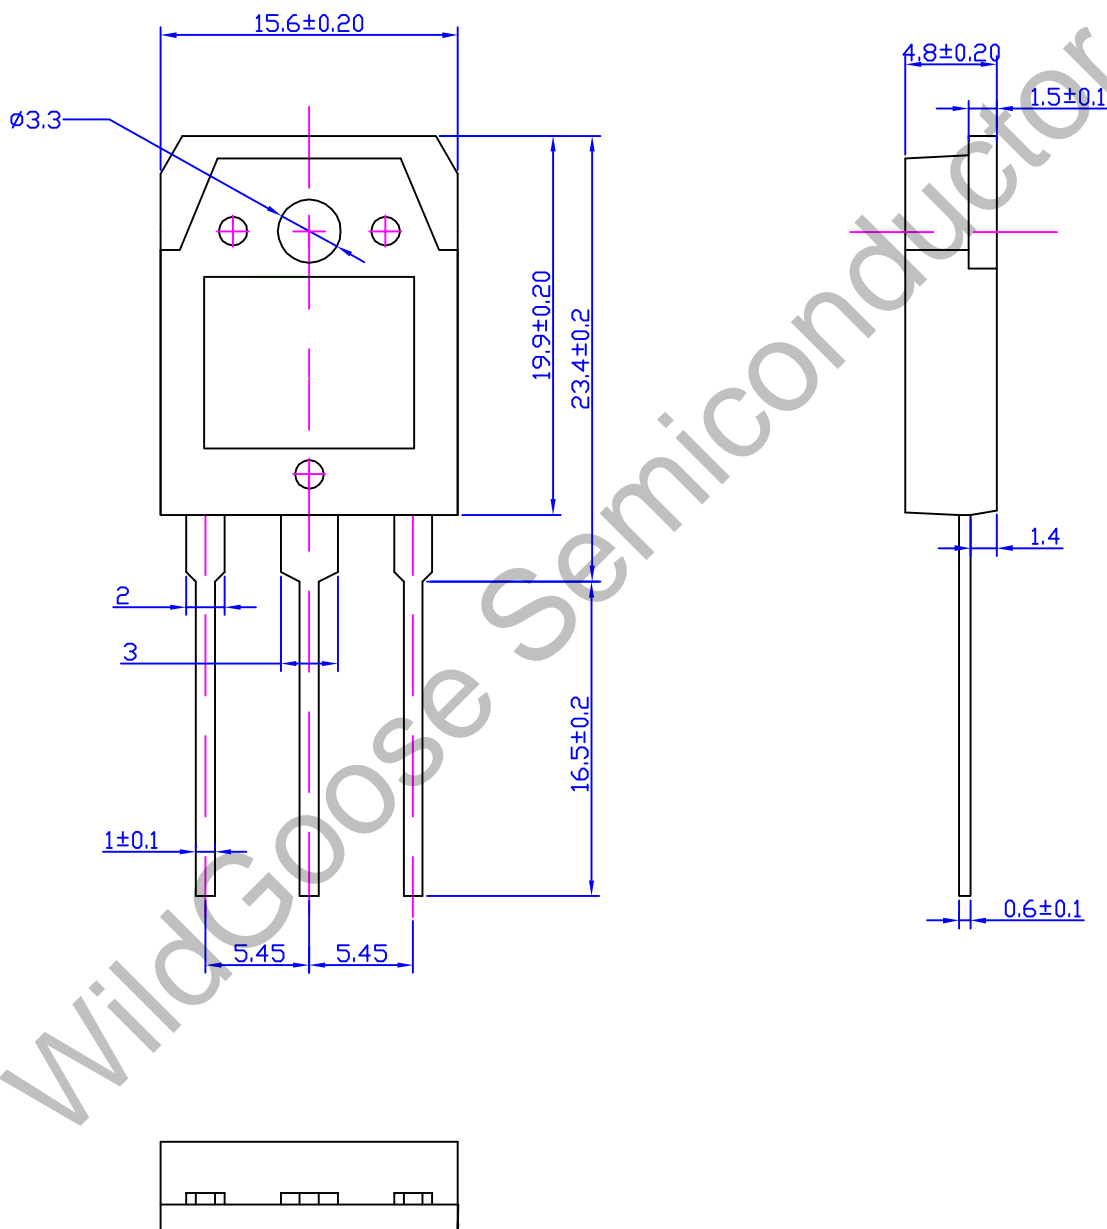

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Wild Goose manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)