

SPD9231A
1-Line, Bi-directional, Thyristor Surge Suppressors
<http://www.sh-willsemi.com>
Descriptions

The SPD9231A is a bi-directional TSS (Thyristor Surge Suppressors) which can provide ESD protection for IC. It is specifically designed to protect telecom equipments from damaging overvoltage transients.

The SPD9231A is used to enable equipments to meet various regulatory requirements including ITU-T K.20, K.21 and IEC 61000-4-5




The SPD9231A is available in SMA package. Standard products are Pb-free and Halogen-free.

Features

- Peak off-state voltage: $\pm 6.0V$ Max
- Excellent capability of absorbing transient surge
- Quick response to surge voltage
- Eliminate voltage overshoot caused by fast-rising transients
- Low leakage current:
- Solid-state silicon technology, non degenerative

Applications

- Audio/Video line
- Network and telecom
- Data lines and security systems
- Serial ports
- BNC interface
- DVR


SMA

Schematic Diagram


AA = Device code
 Y = Year code
 W = Week code

Marking (Top View)
Order information

Device	Package	Shipping
SPD9231A-2/TR	SMA	5000/Tape&Reel

Electrical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

Part Number	V_{DRM}	I_{DRM}	V_S	V_{BR}^1	I_S	I_H	V_T	I_T	C_o^2
	V	μA	V	V	mA	mA	V	A	pF
		Max.	Max.	Min.		Max.	Max.		Max.
SPD9231A	6.0	1	12.5	6.2	800	150	4	2.2	100

Notes:

- 1) V_{BR} is measured at $I_{\text{BR}}=1\text{mA}$.
- 2) Off-state capacitance is measured at $f = 1\text{MHz}$, $V_{\text{DC}} = 2\text{V}$.

Surge Ratings

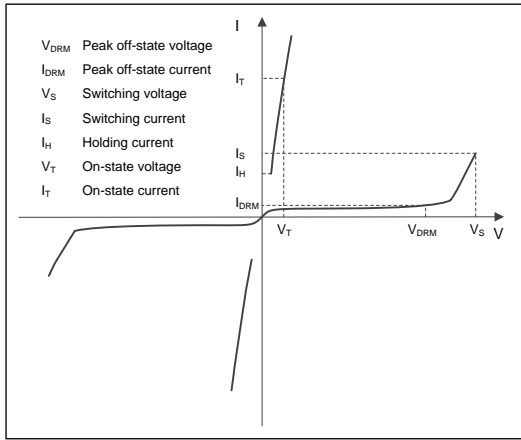
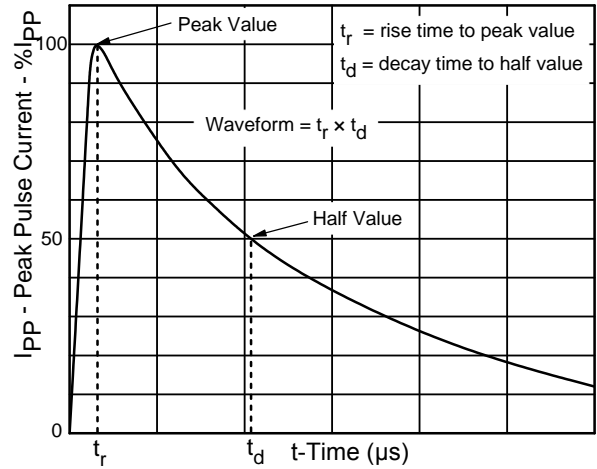
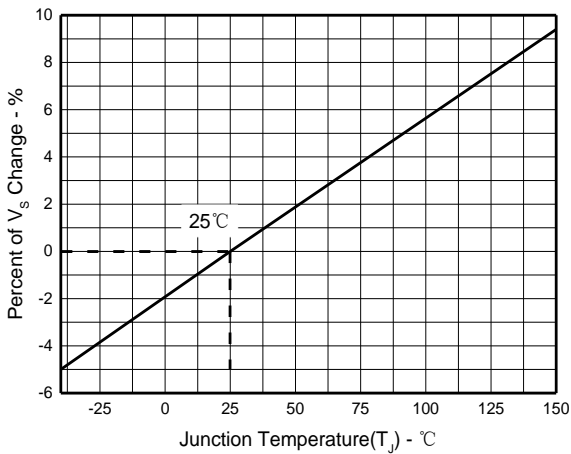
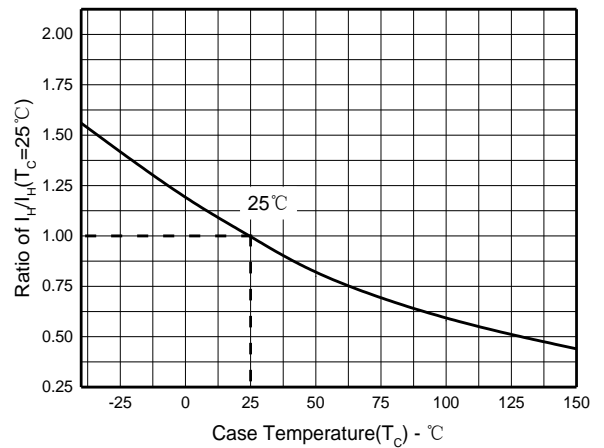
Part Number	$5/320\mu\text{s}^1$
	$10/700\mu\text{s}^2$
SPD9231A	4000 V

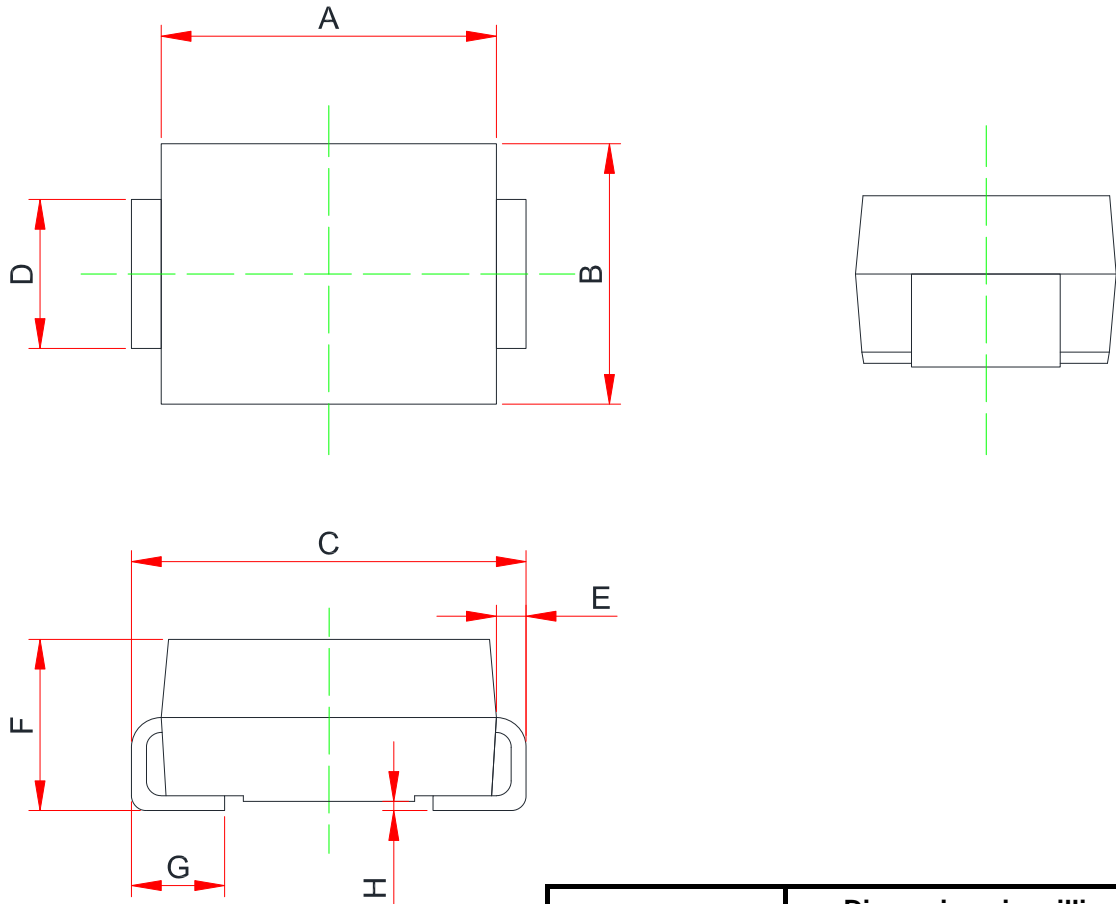
Notes:

- 1) Current waveform.
- 2) Voltage waveform.

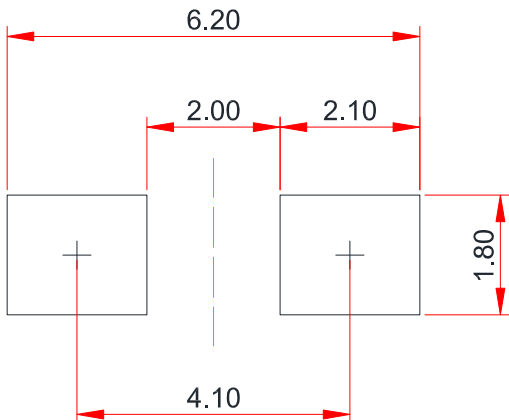
Thermal considerations Thermal considerations

Parameter	Symbol	Rating	Unit
Operation junction temperature	T_J	-40~150	$^\circ\text{C}$
Storage temperature	T_{STG}	-55~150	$^\circ\text{C}$
Lead temperature	T_L	260	$^\circ\text{C}$
Junction to ambient thermal resistance	$R_{\theta\text{JA}}$	90	$^\circ\text{C/W}$

Typical characteristics ($T_A=25^\circ\text{C}$, unless otherwise noted)

Definitions of electrical characteristics

Peak pulse current waveform

Normalized V_S Change vs. Junction Temperature

Normalized Holding Current vs. Case Temperature

Package outline dimensions
SMA


Symbol	Dimensions in millimeter	
	Min.	Max.
A	3.990	4.500
B	2.540	2.790
C	4.930	5.280
D	1.250	1.650
E	0.152	0.305
F	1.980	2.290
G	0.780	1.520
H	-	0.203

Recommend land pattern (Unit: mm)

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thyristor Surge Protection Devices - TSPD category:

Click to view products by Will Semiconductor manufacturer:

Other Similar products are found below :

[A2106UC6LRP](#) [B1100CCLRP](#) [B1101UCLRP](#) [B1160CALRP](#) [B2050CCLRP](#) [B61089BDR](#) [B61089QDR](#) [BEP0640SB](#) [BEP1800SB](#)
[BEP2300SC](#) [BEP3100SC](#) [BEP3100TA](#) [BEP4200SC](#) [BS8000-N-C-F](#) [DSL0080T023G6RP](#) [DSL0120T023G6RP](#) [DSL0180T023G6RP](#)
[DSL0240T023G6RP](#) [DSL0360T023G6RP](#) [KP3100SC](#) [MHC-260-16](#) [MHC-300-16](#) [MHC-500-18](#) [NP3100SAT3G](#) [NP3100SBT3G](#)
[P0080EAL](#) [P0080ECL](#) [P0080FA-MS](#) [P0080Q12ALRP](#) [P0080Q22CLRP](#) [P0080S1ALRP](#) [P0080S3NLRP](#) [P0080S4BLRP](#) [P0080SA](#)
[P0080SALRP](#) [P0080SAMCLRP](#) [P0080SB](#) [P0080SB](#) [P0080SB](#) [P0080SB](#) [P0080SB](#) [P0080SB](#) [P0080SB](#) [P0080SBLRP](#) [P0080SB-MS](#) [P0080SC](#)
[P0080SC](#) [P0080SCLRP](#) [P0080SCMCLRP](#) [P0080SC-MS](#) [P0080SDLRP](#)