

WL2810

**Low noise, High PSRR, High speed, CMOS
LDO**

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)

Descriptions

The WL2810 series is a high accuracy, low noise, high speed, low dropout CMOS Linear regulator with high ripple rejection. The devices offer a new level of cost effective performance in cellular phones, laptop and notebook computers, and other portable devices.

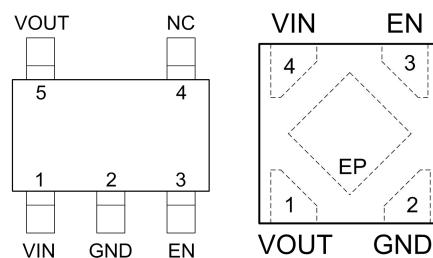


SOT-353

DFN1X1-4L

The WL2810 has the fold-back maximum output current which depends on the output voltage. So the current limit functions both as a short circuit protection and as an output current limiter.


The WL2810 regulators are available in standard SOT-353 package and DFN1x1-4L Package. Standard products are Pb-free and Halogen-free.




Pin Configuration (Top View)

Features

- Input voltage : 2.2V~5.5V
- Output range : 1.0V~3.3V
- Output current : 300mA
- PSRR : 70dB @ 217Hz
- Dropout voltage : 250mV @ $I_{OUT}=300mA$
- Quiescent current : 42 μA Typ.
- Shut-down current : < 1 μA
- Recommend capacitor : 1uF



B : Package Code
* : Voltage Code
M: Month(A~Z)



D: Package Code
* : Voltage Code
Y : Year Code
W: Week Code

For detail marking information, please see page 10.

Marking

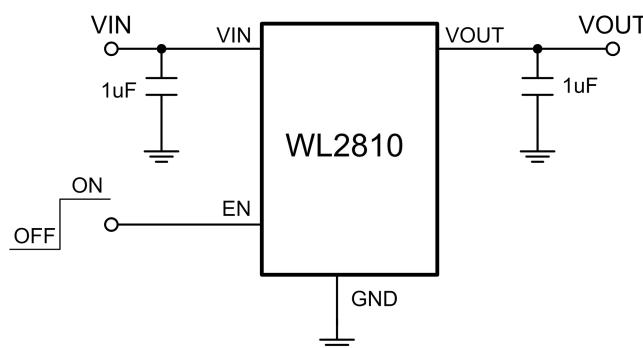
Applications

- MP3/MP4 Players
- Cellphones, radiophone, digital cameras
- Bluetooth, wireless handsets
- Others portable electronics device

Order Information

For detail order information, please see page 10.

Typical Application



Pin Description


SOT-353

| PIN | Symbol | Description |
|-----|--------|----------------------|
| 1 | VIN | Input |
| 2 | GND | Ground |
| 3 | EN | Enable (Active high) |
| 4 | NC | Not connected |
| 5 | VOUT | Output |

DFN1X1-4L

| PIN | Symbol | Description |
|-----|--------|--|
| 1 | VOUT | Output |
| 2 | GND | Ground |
| 3 | EN | Enable (Active high) |
| 4 | VIN | Input |
| EP | | GND level, this pin must connect to GND. |

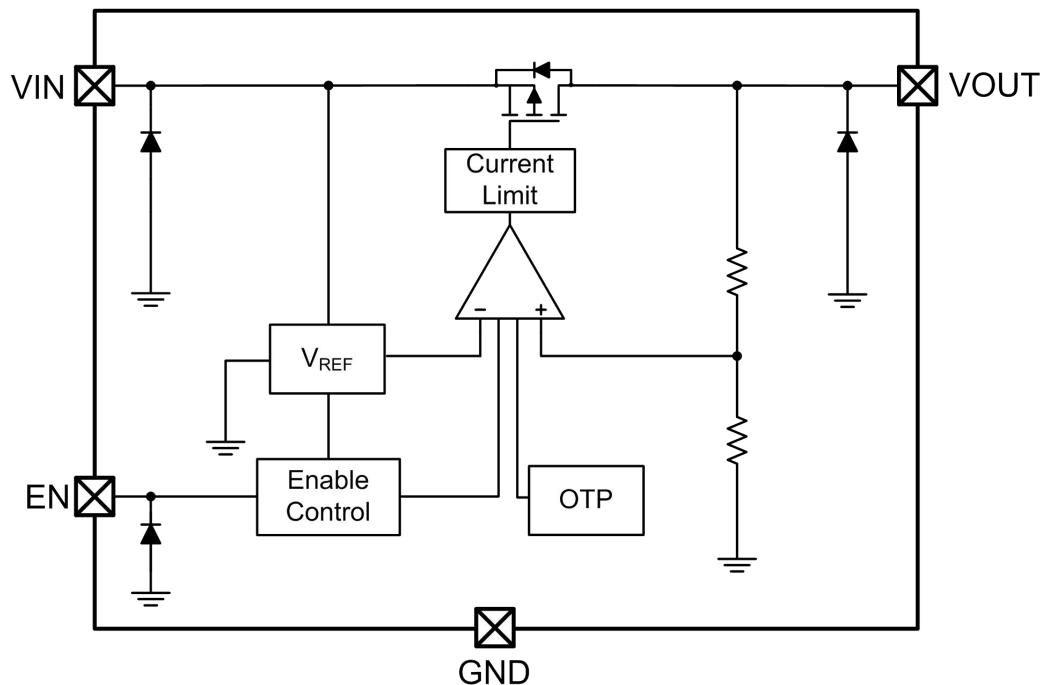Block Diagram



Absolute Maximum Ratings

| Parameter | Value | Unit |
|---|----------------|------|
| Power Dissipation, $P_D@T_A=25^\circ C$ | 400 | mW |
| V_{IN} Range | -0.3~6.5 | V |
| V_{EN} Range | -0.3~ V_{IN} | V |
| V_{OUT} Range | -0.3~ V_{IN} | V |
| I_{OUT} | 400 | mA |
| Lead Temperature Range | 260 | °C |
| Storage Temperature Range | -55 ~ 150 | °C |
| Operating Junction Temperature Range | 150 | °C |
| ESD Ratings | HBM | 8000 |
| | MM | 400 |
| | | V |


Recommend Operating Ratings

| Parameter | Value | Unit |
|---|---------|------|
| Operating Supply voltage | 2.2~5.5 | V |
| Operating Temperature Range | -40~85 | °C |
| Thermal Resistance, $R_{\theta JA}$ (SOT-353) | 250 | °C/W |
| Thermal Resistance, $R_{\theta JA}$ (DFN1x1-4L) | 250 | °C/W |


Electronics Characteristics (Ta=25°C, V_{IN}=V_{OUT}+1V, C_{IN}=C_{OUT}=1uF, unless otherwise noted)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|--------------------|--|--------------|------------------|------|-------------------|
| Output Voltage | V _{OUT} | V _{OUT} ≤ 1.5V, V _{IN} =2.7V, I _{OUT} =1mA | 0.97 | V _{OUT} | 1.03 | V |
| | | V _{OUT} >1.5V, I _{OUT} =1mA | 0.98 | V _{OUT} | 1.02 | |
| Current Limit | I _{LIM} | V _{EN} =V _{IN} | 300 | | | mA |
| Dropout Voltage | V _{DROP} | V _{OUT} =3.3V, I _{OUT} =300mA | | 220 | 330 | mV |
| | | V _{OUT} =3.0V, I _{OUT} =300mA | | 240 | 360 | |
| | | V _{OUT} =2.8V, I _{OUT} =300mA | | 250 | 375 | |
| | | V _{OUT} =2.5V, I _{OUT} =300mA | | 280 | 420 | |
| | | V _{OUT} =1.8V, I _{OUT} =300mA | | 400 | 600 | |
| | | V _{OUT} ≤1.5V, I _{OUT} =300mA | Vin-min=2.2V | | | |
| Line Regulation | △V _{LINE} | V _{IN} =2.7~5.5V, I _{OUT} =1mA | | 0.01 | 0.1 | %/V |
| Load Regulation | △V _{Load} | V _{OUT} =2.8V , I _{OUT} =1~300mA | | 10 | 30 | mV |
| Quiescent Current | I _Q | V _{OUT} =2.8V, I _{OUT} =0 | | 42 | 70 | μA |
| Short Current | I _{SHORT} | V _{EN} =V _{IN} , V _{OUT} Short to GND with 1Ω | | 80 | | mA |
| Shut-down Current | I _{SHDN} | V _{EN} =0V | | | 1.0 | μA |
| Power Supply Rejection Rate | PSRR | V _{IN} =(V _{OUT} +1V) _{DC} +0.5V _{P-P} F=217Hz ,Iout=10mA | | 70 | | dB |
| | | V _{IN} =(V _{OUT} +1V) _{DC} +0.5V _{P-P} F=10KHz, Iout=10mA | | 60 | | |
| EN logic high voltage | V _{ENH} | V _{IN} =5.5V, I _{OUT} =1mA | 1.2 | | | V |
| EN logic low voltage | V _{ENL} | V _{IN} =5.5V, V _{OUT} =0V | | | 0.4 | V |
| EN Input Current | I _{EN} | V _{EN} = 0 to 5.5V | | | 1.0 | μA |
| Output Noise Voltage | e _{NO} | 10Hz to 100KHz, C _{OUT} =1μF | | 55 | | μV _{RMS} |
| Thermal shutdown threshold | T _{SD} | | | 165 | | °C |
| Thermal shutdown hysteresis | △ T _{SD} | | | 30 | | °C |

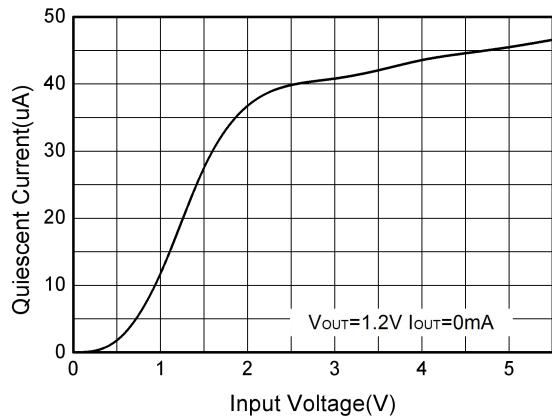
Typical characteristics (Ta=25°C, V_{IN}=3.8V, V_{OUT} = 2.8V C_{IN}=C_{OUT}=1uF, unless otherwise noted)




Quiescent current vs. Supply voltage

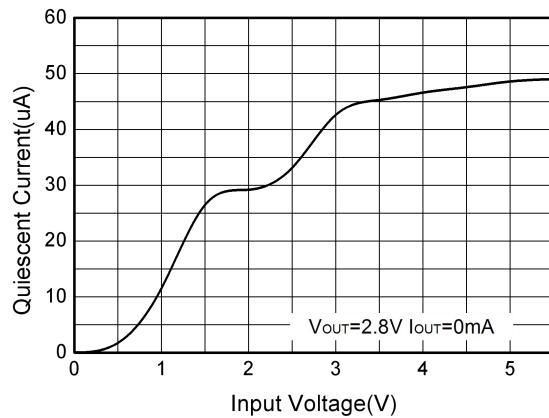


Quiescent current vs. Supply voltage

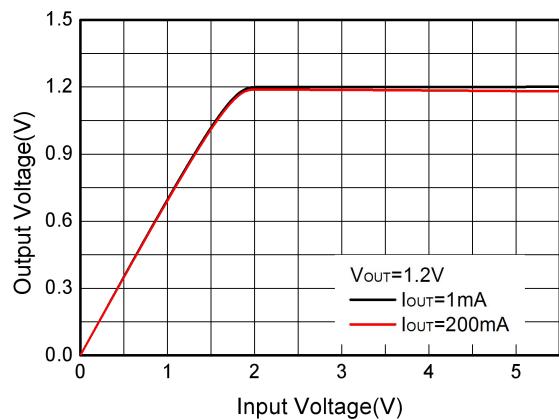


Output voltage vs. Supply voltage

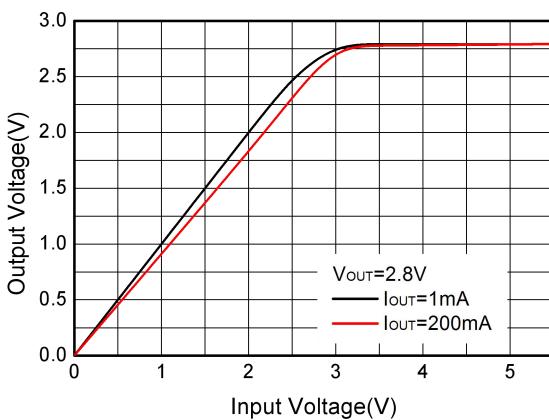





Output voltage vs. Supply voltage








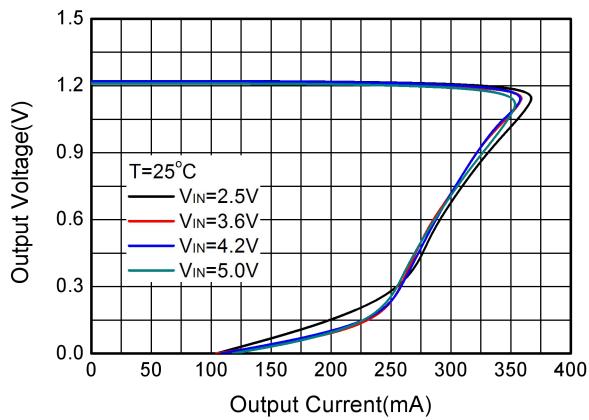



Output voltage vs. Output current

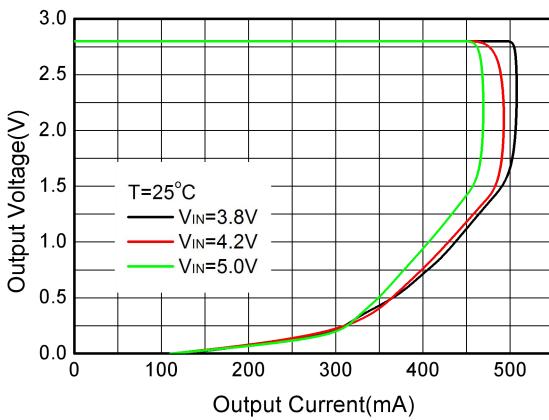


Output voltage vs. Output current

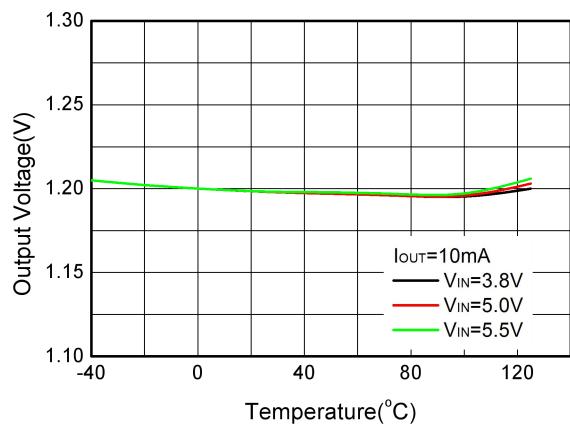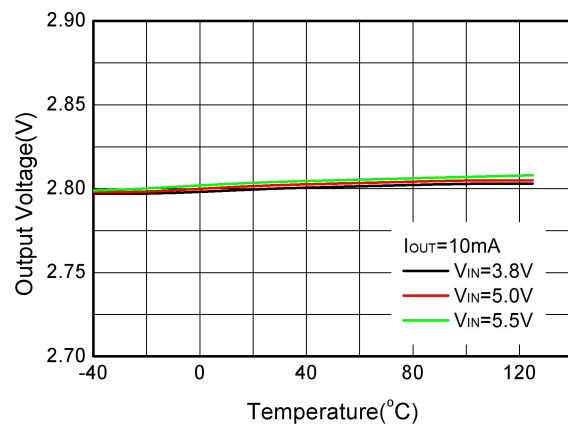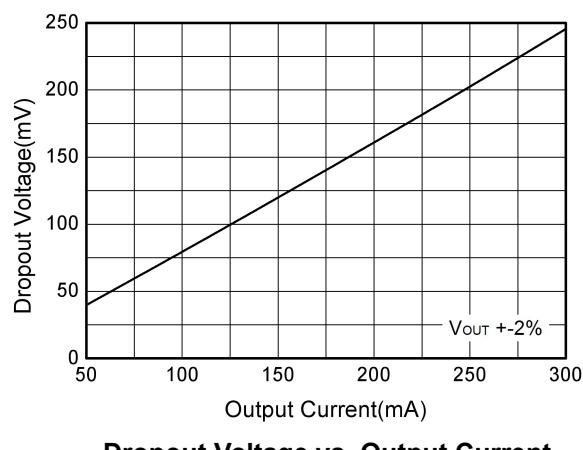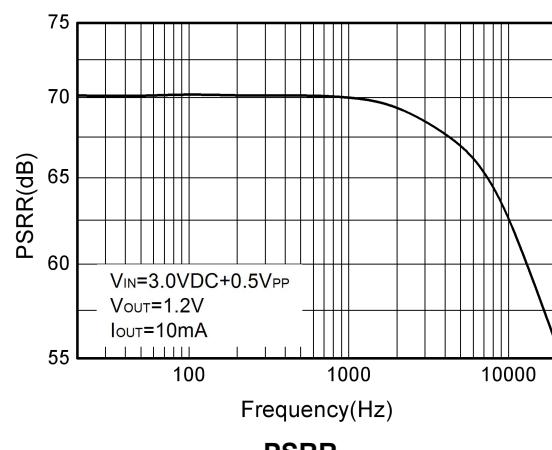
Output Voltage vs. Temperature

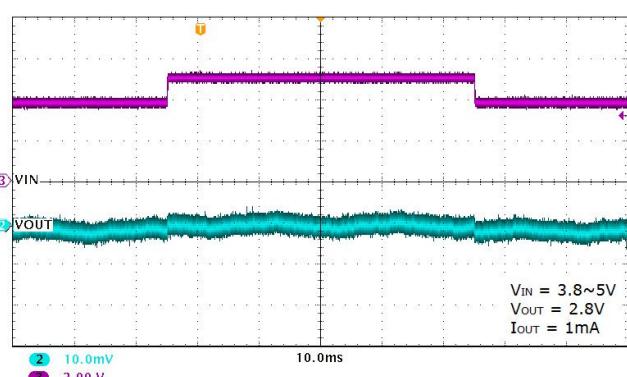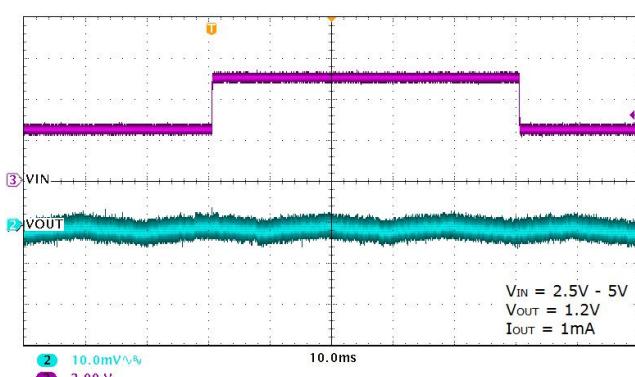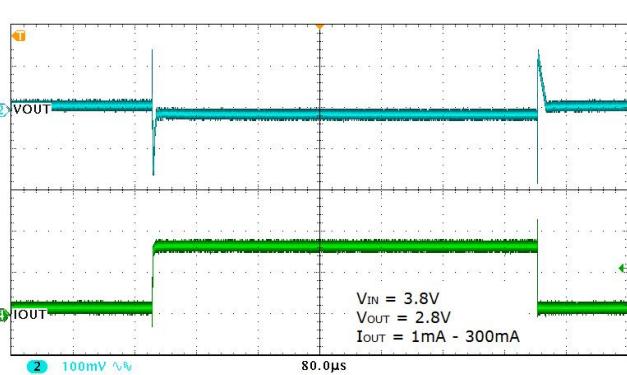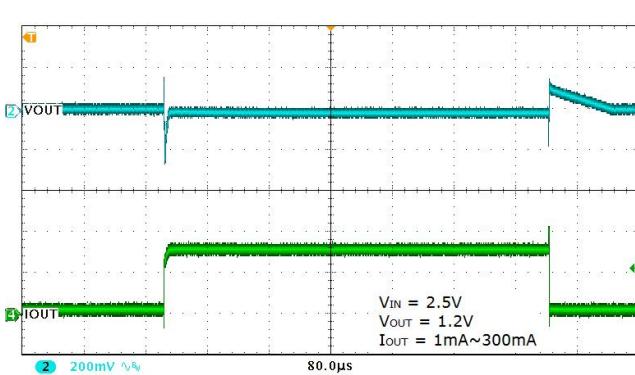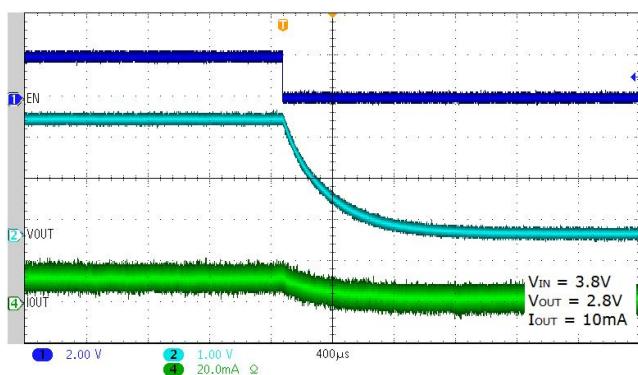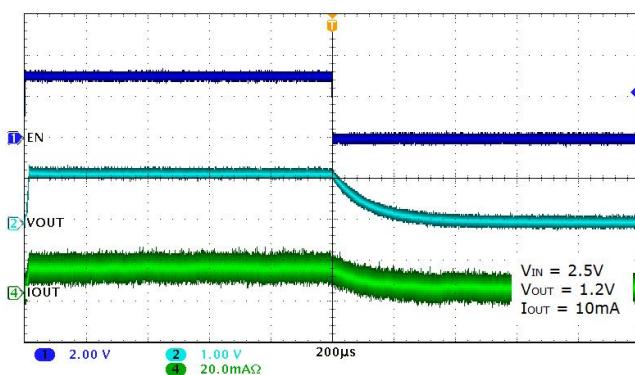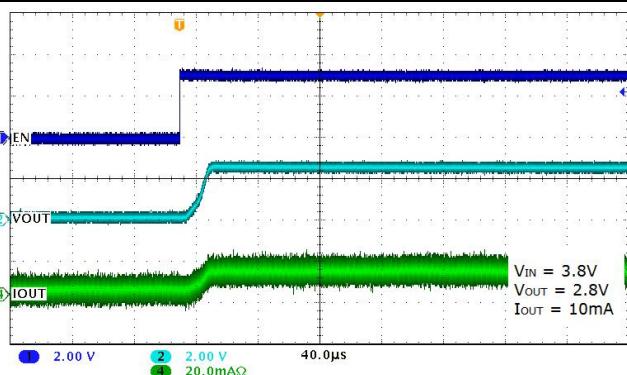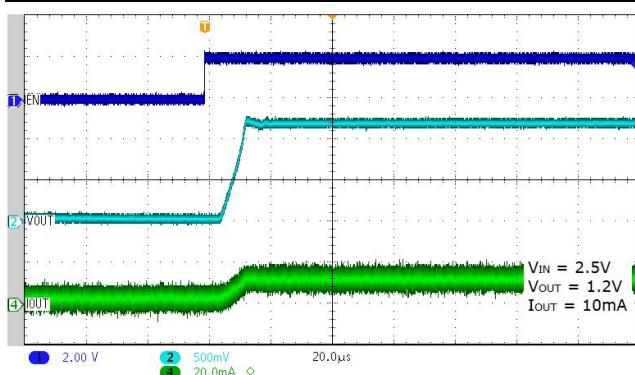Output Voltage vs. Temperature

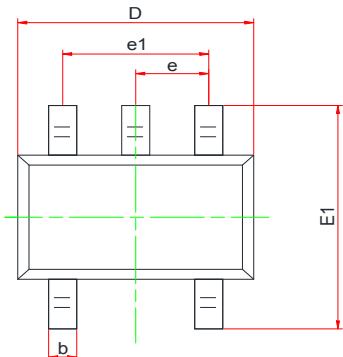Dropout Voltage vs. Output Current

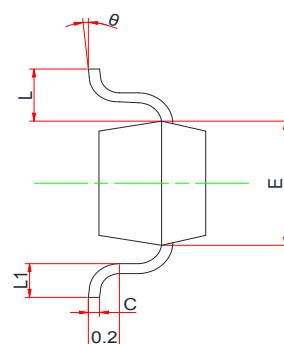PSRR




PACKAGE OUTLINE DIMENSIONS
SOT-353


TOP VIEW




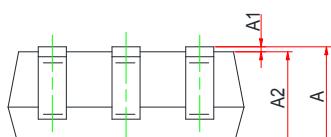SIDE VIEW






SIDE VIEW


| Symbol | Dimensions in Millimeters | | |
|----------|---------------------------|-----------|------|
| | Min. | Typ. | Max. |
| A | 0.85 | - | 1.10 |
| A1 | 0.00 | - | 0.10 |
| A2 | 0.80 | 0.90 | 1.00 |
| b | 0.15 | 0.25 | 0.35 |
| c | 0.08 | - | 0.15 |
| D | 2.00 | 2.10 | 2.20 |
| E | 1.15 | 1.25 | 1.35 |
| E1 | 2.15 | 2.30 | 2.45 |
| e | | 0.65 Typ. | |
| e1 | 1.20 | 1.30 | 1.40 |
| L | | 0.50 Ref. | |
| L1 | 0.26 | 0.36 | 0.46 |
| θ | 0 ° | - | 8 ° |

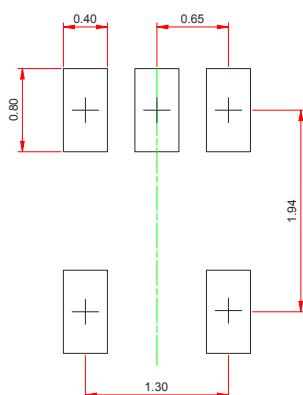Recommend PCB Layout (Unit: mm)

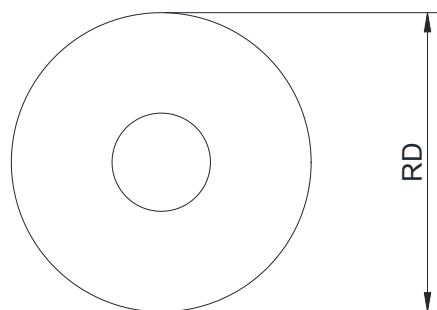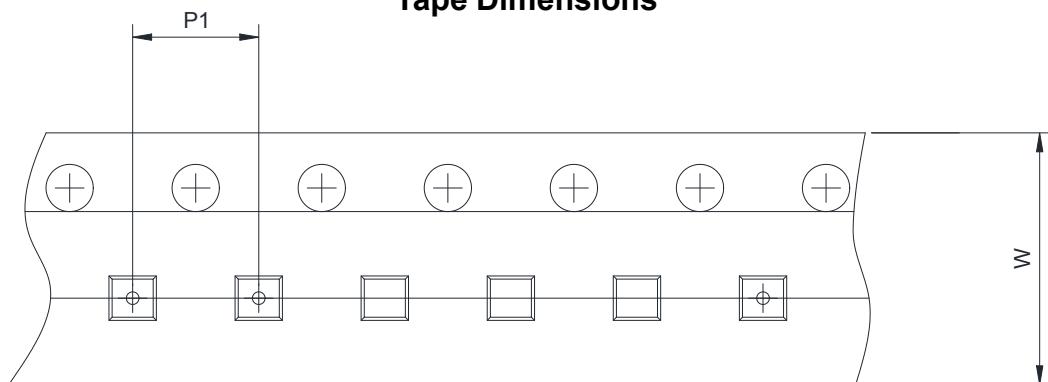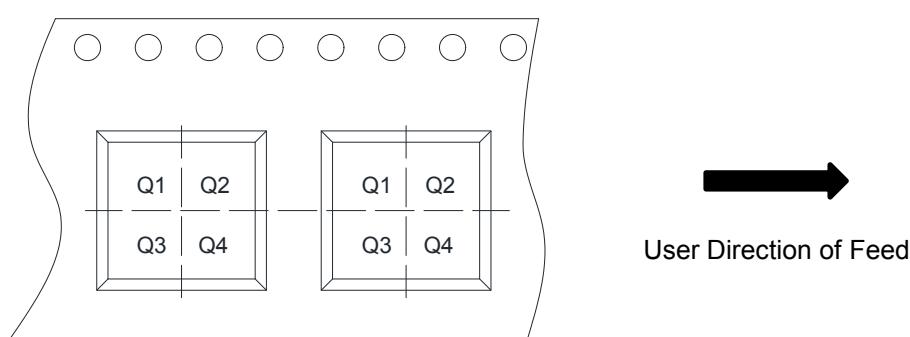Notes:




This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.

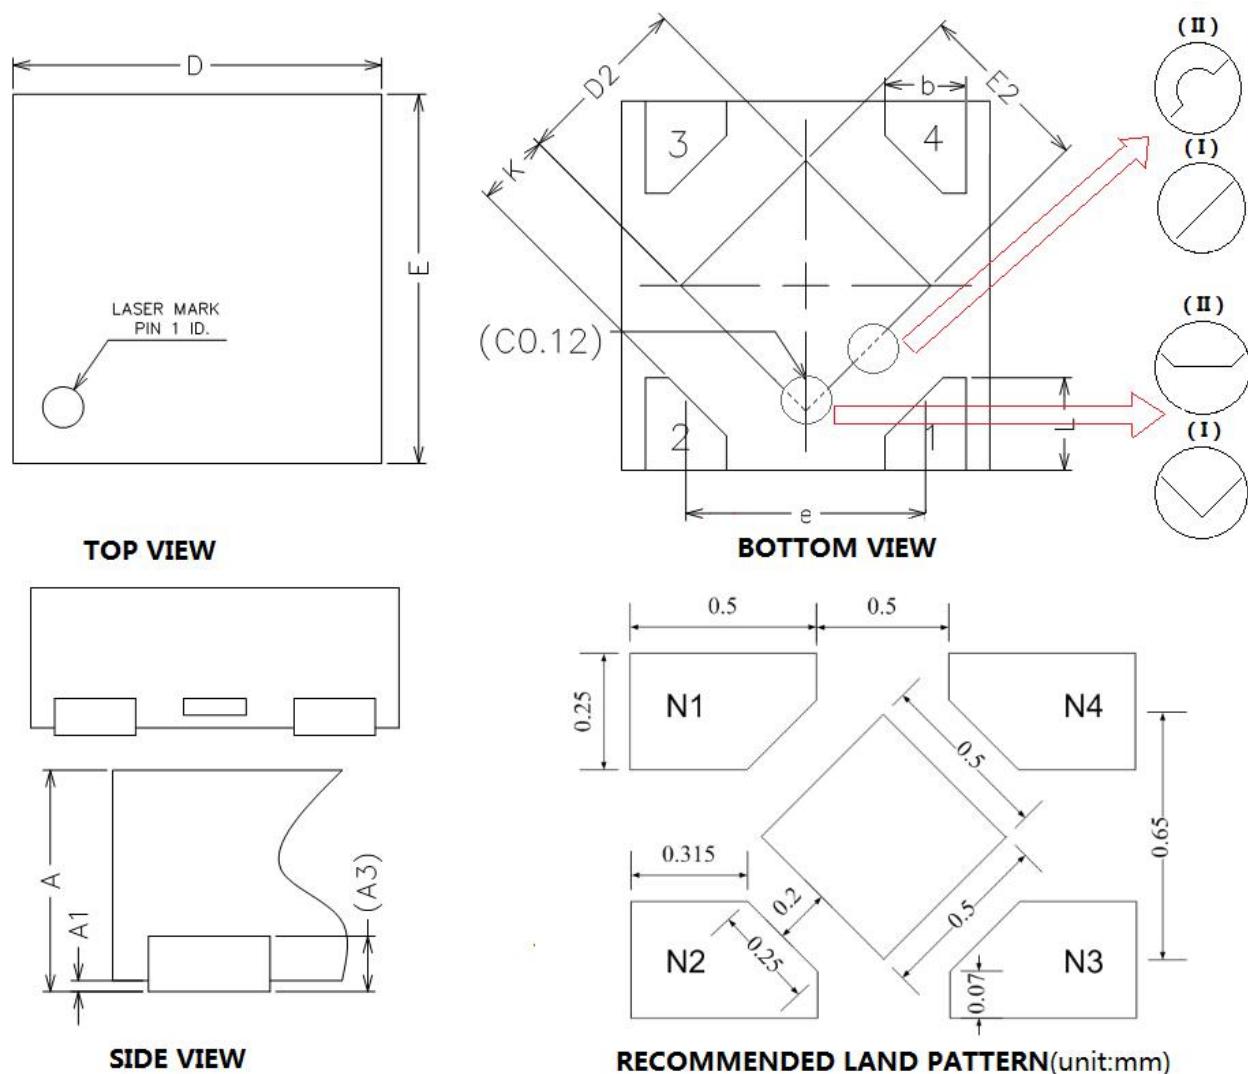TAPE AND REEL INFORMATION
Reel Dimensions

Tape Dimensions

Quadrant Assignments For PIN1 Orientation In Tape


| | | |
|------|---|--|
| RD | Reel Dimension | <input checked="" type="checkbox"/> 7inch <input type="checkbox"/> 13inch |
| W | Overall width of the carrier tape | <input checked="" type="checkbox"/> 8mm <input type="checkbox"/> 12mm |
| P1 | Pitch between successive cavity centers | <input type="checkbox"/> 2mm <input checked="" type="checkbox"/> 4mm <input type="checkbox"/> 8mm |
| Pin1 | Pin1 Quadrant | <input type="checkbox"/> Q1 <input type="checkbox"/> Q2 <input checked="" type="checkbox"/> Q3 <input type="checkbox"/> Q4 |

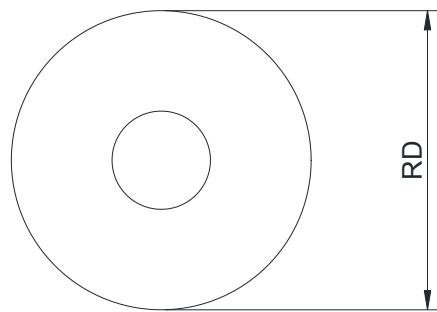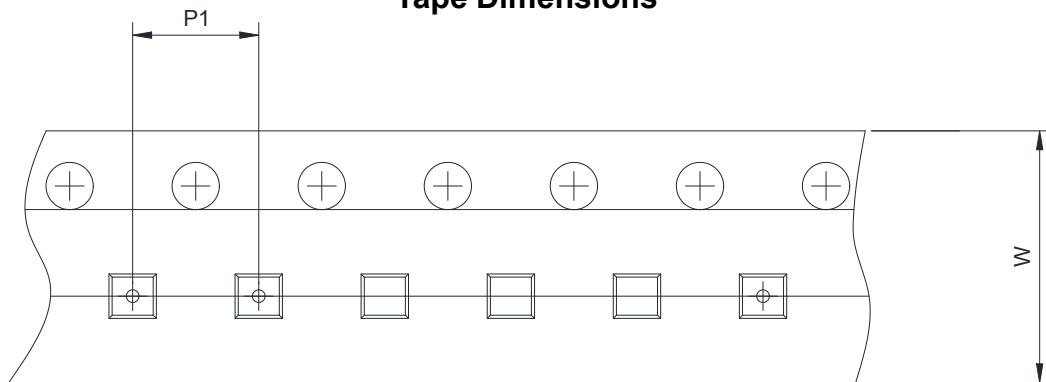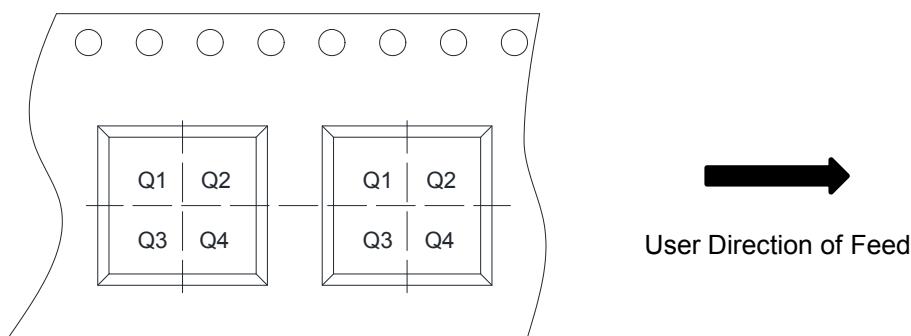Packaging Information
DFN1x1-4L


| Symbol | Dimensions In Millimeters | | |
|--------|---------------------------|------|-------|
| | Min. | Typ. | Max. |
| A | 0.34 | 0.37 | 0.40 |
| A1 | 0.00 | 0.02 | 0.105 |
| A3 | 0.10 REF | | |
| b | 0.17 | 0.22 | 0.27 |
| D | 0.95 | 1.00 | 1.05 |
| E | 0.95 | 1.00 | 1.05 |
| D2 | 0.43 | 0.48 | 0.53 |
| E2 | 0.43 | 0.48 | 0.53 |
| L | 0.20 | 0.25 | 0.30 |
| e | 0.60 | 0.65 | 0.70 |
| K | 0.15 | - | - |

TAPE AND REEL INFORMATION
Reel Dimensions

Tape Dimensions

Quadrant Assignments For PIN1 Orientation In Tape


| | | |
|-------------|--|--|
| RD | Reel Dimension | <input checked="" type="checkbox"/> 7inch <input type="checkbox"/> 13inch |
| W | Overall width of the carrier tape | <input checked="" type="checkbox"/> 8mm <input type="checkbox"/> 12mm <input type="checkbox"/> 16mm |
| P1 | Pitch between successive cavity centers | <input checked="" type="checkbox"/> 2mm <input type="checkbox"/> 4mm <input type="checkbox"/> 8mm |
| Pin1 | Pin1 Quadrant | <input checked="" type="checkbox"/> Q1 <input type="checkbox"/> Q2 <input type="checkbox"/> Q3 <input type="checkbox"/> Q4 |

ORDER INFORMATION

| Ordering No. | Vout (V) | Package | Operating Temperature | Marking | Shipping |
|-----------------|-------------|-----------|--------------------------|----------|-------------------------|
| WL2810B12-5/TR | 1.2 | SOT-353 | -40~+85°C | BEM | Tape and Reel, 3000 |
| WL2810B15-5/TR | 1.5 | SOT-353 | -40~+85°C | BGM | Tape and Reel, 3000 |
| WL2810B18-5/TR | 1.8 | SOT-353 | -40~+85°C | BHM | Tape and Reel, 3000 |
| WL2810B28-5/TR | 2.8 | SOT-353 | -40~+85°C | BLM | Tape and Reel, 3000 |
| WL2810B30-5/TR | 3.0 | SOT-353 | -40~+85°C | BMM | Tape and Reel, 3000 |
| WL2810B33-5/TR | 3.3 | SOT-353 | -40~+85°C | BNM | Tape and Reel, 3000 |
| WL2810D10-4/TR | 1.0 | DFN1x1-4L | -40~+85°C | DB YW | Tape and Reel, 10000 |
| WL2810D105-4/TR | 1.05 | DFN1x1-4L | -40~+85°C | DC YW | Tape and Reel, 10000 |
| WL2810D12-4/TR | 1.2 | DFN1x1-4L | -40~+85°C | DE YW | Tape and Reel, 10000 |
| WL2810D13-4/TR | 1.3 | DFN1x1-4L | -40~+85°C | DF YW | Tape and Reel, 10000 |
| WL2810D15-4/TR | 1.5 | DFN1x1-4L | -40~+85°C | DG YW | Tape and Reel, 10000 |
| WL2810D18-4/TR | 1.8 | DFN1x1-4L | -40~+85°C | DH YW | Tape and Reel, 10000 |
| WL2810D25-4/TR | 2.5 | DFN1x1-4L | -40~+85°C | DK YW | Tape and Reel, 10000 |
| WL2810D28-4/TR | 2.8 | DFN1x1-4L | -40~+85°C | DL YW | Tape and Reel, 10000 |
| WL2810D30-4/TR | 3.0 | DFN1x1-4L | -40~+85°C | DM YW | Tape and Reel, 10000 |
| WL2810D33-4/TR | 3.3 | DFN1x1-4L | -40~+85°C | DN YW | Tape and Reel, 10000 |

Marking:

B* = Device Code

D* = Device Code

M = Month

Y = Year

W = Week

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LDO Voltage Regulators category:

Click to view products by Will Semiconductor manufacturer:

Other Similar products are found below :

[AP7363-SP-13](#) [L79M05TL-E](#) [AP7362-HA-7](#) [PT7M8202B12TA5EX](#) [TCR3DF185,LM\(CT\)](#) [TCR3DF45,LM\(CT\)](#) [TLE4473G V52](#) [059985X](#)
[NCP4687DH15T1G](#) [701326R](#) [NCV8170AXV250T2G](#) [AP7315-25W5-7](#) [AP2111H-1.2TRG1](#) [ZLDO1117QK50TC](#) [AZ1117ID-ADJTRG1](#)
[TCR3DG12,LF](#) [MIC5514-3.3YMT-T5](#) [SCD7912BTG](#) [NCP154MX180270TAG](#) [SCD33269T-5.0G](#) [NCV8170BXV330T2G](#)
[NCV8170BMX330TCG](#) [NCV8170AMX120TCG](#) [NCP706ABMX300TAG](#) [NCP153MX330180TCG](#) [NCP114BMX075TCG](#) [MC33269T-3.5G](#)
[CAT6243-ADJCMT5T](#) [TCR3DG33,LF](#) [TCR4DG35,LF](#) [TAR5S15U\(TE85L,F\)](#) [TAR5S18U\(TE85L,F\)](#) [TCR3UG19A,LF](#) [TCR4DG105,LF](#)
[MPQ2013AGG-5-P](#) [NCV8170AMX360TCG](#) [TLE4268GSXUMA2](#) [NCP715SQ15T2G](#) [MIC5317-3.0YD5-T5](#) [NCV563SQ18T1G](#)
[NCP715MX30TBG](#) [NCV8702MX25TCG](#) [NCV8170BXV120T2G](#) [MIC5317-1.2YD5-T5](#) [NCV8170AMX150TCG](#) [NCV8170BMX150TCG](#)
[AP2213D-3.3TRG1](#) [NCV8170BMX120TCG](#) [NCV8170BMX310TCG](#) [NCV8170BMX360TCG](#)